SCIENTIFIC AMERICAN

A WEEKLY JOURNAL OF PRACTICAL INFORMATION, ART, SCIENCE, MECHANICS, CHEMISTRY, AND MANUFACTURES.

Vol. XXXII.—No. 26. (NEW SERIES.) NEW YORK, JUNE 26, 1875. $3.20 per Annum Postage prepaid.

THE GRAND CENTRAL RAILWAY DEPOT.

We publish herewith an accurate engraving of the interior of the depot at 42d street, New York city, built for the accommodation of the New York Central and Hudson River, New York and Harlem, and New York and New Haven Railways. As we have already fully described this remarkable structure, there is no need to do more than recapitulate its proportions, which are 652 feet in length and 199 feet 2 inches in width. The roof is supported on 32 semicircular trusses, which are spaced 20 feet 4 inches between centers, extending from a point 2 feet below the rails to an elevation of 94 feet from the springing line to the extrados of the arch. Each truss has at its foot two tie rods 2¼ inches in diameter, with a turn buckle at the mid-length. The pitch of the roof is formed by rafters secured to the top chord of the arch

The trusses weigh about forty tuns each, and were raised in sections by means of a movable staging 80 feet high, 160 feet long, and 30 feet wide, moving on ways, and shifted along step by step as the work of raising the trusses progressed. About 8,000,000 lbs. of iron were used in the structure, 10,000,000 bricks, and 20,000 barrels of cement.

The car house is lighted through three skylights extending over the entire length of the roof—one on the center, double pitched, and a single one on each side of the center, and having altogether 80,000 square feet of glass—nearly two acres. The north end is closed by an iron front, the south end by the building containing the principal offices of the companies.

The roof covers nearly three acres, the station itself about four acres. The station has separate tracks for the trains of each company, besides those for the Fourth avenue horse cars, which run into and to and from this station, which was opened for traffic October 7, 1871. The gas burners of the building are lighted at night by electricity, 25,000 feet of electric wire being used, and 20,000 feet of gas pipe. The 144 steam radiators are heated by 15 miles of steam pipe.

The roof is ventilated by six lines of ventilating slats, 6 feet high and 8 inches wide, with Z-shaped intervals between the slats.

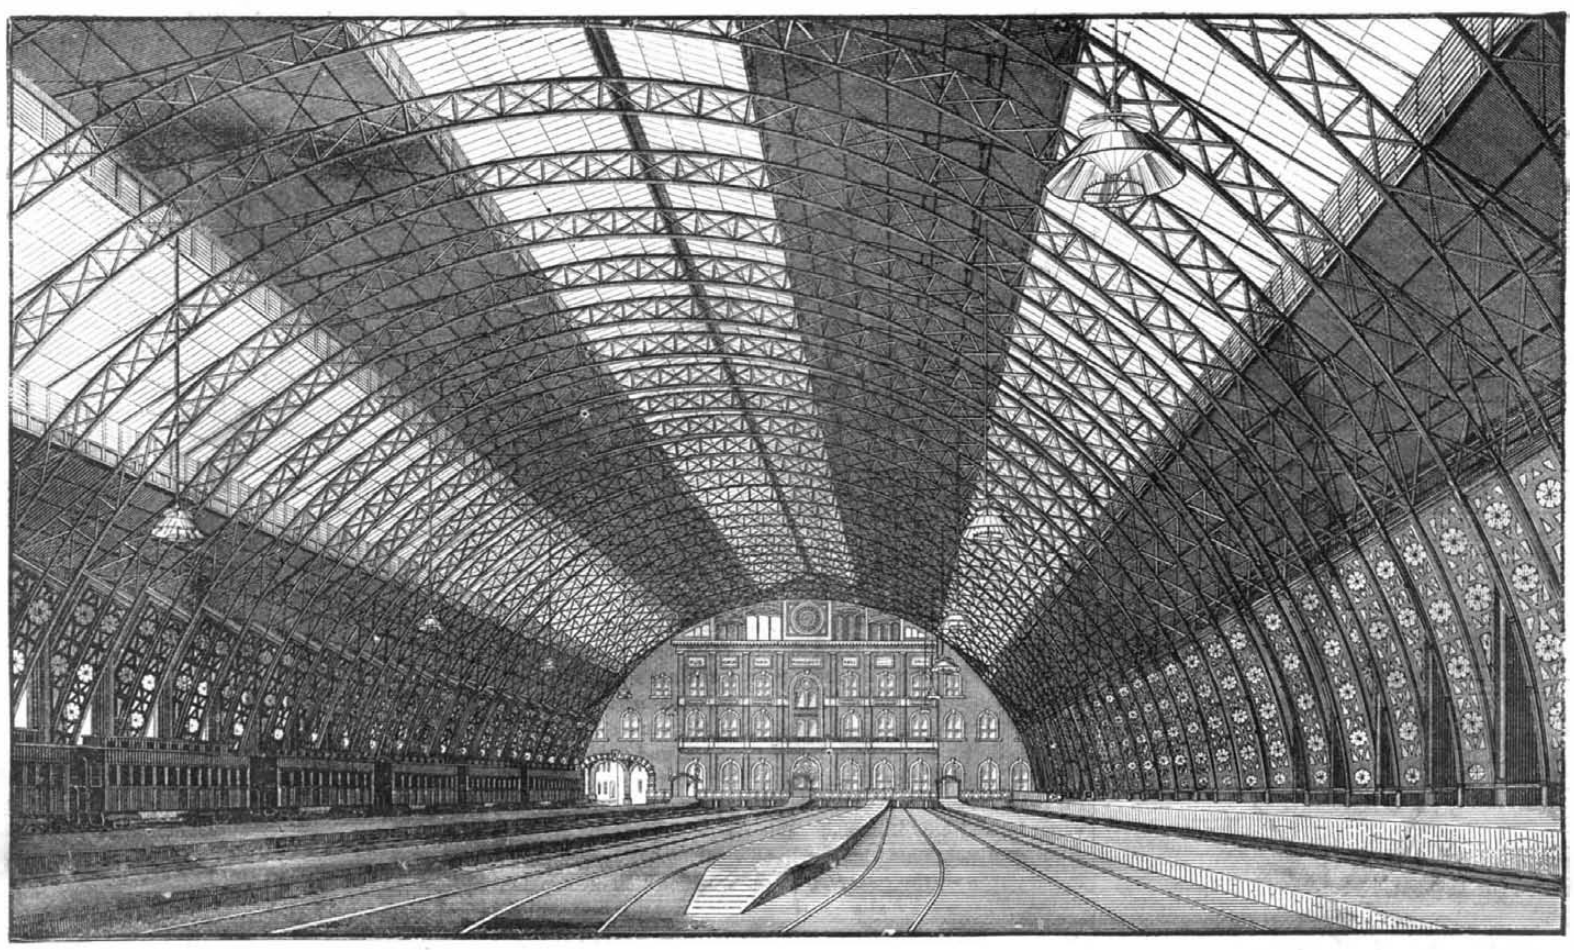

THE GRAND CENTRAL DEPOT, NEW YORK CITY.

Great Volcanic Eruption in Iceland.

Mr. Magnusson, of Cambridge, England, says:—"On March 29th, the fall of the ashes was so excessive that it covered the eastern country sides, Jökuldal especially, with a coat six inches at its thickest; and all that day, although it was bright and sunny, the people spent in absolute pitch darkness. Fountains and rivulets were dammed by the ashes, and every mountain stream, always of a crystalline purity in Eastern Iceland, where there are neither glaciers nor *moraine*, ran dark and muddy between banks covered with drifts of ashes. The farmers have fled out of the ash-covered country sides with their cattle, in quest of pastures not yet destroyed by the *scoria;* but with what chance of saving their live stock does not appear. To all appearance, the present eruption seems likely to become a calamitous event for Iceland.'

A BEAUTIFUL PALM TREE.

The plant shown in our engraving is one of the most graceful members of the class, and deserves to become popular in

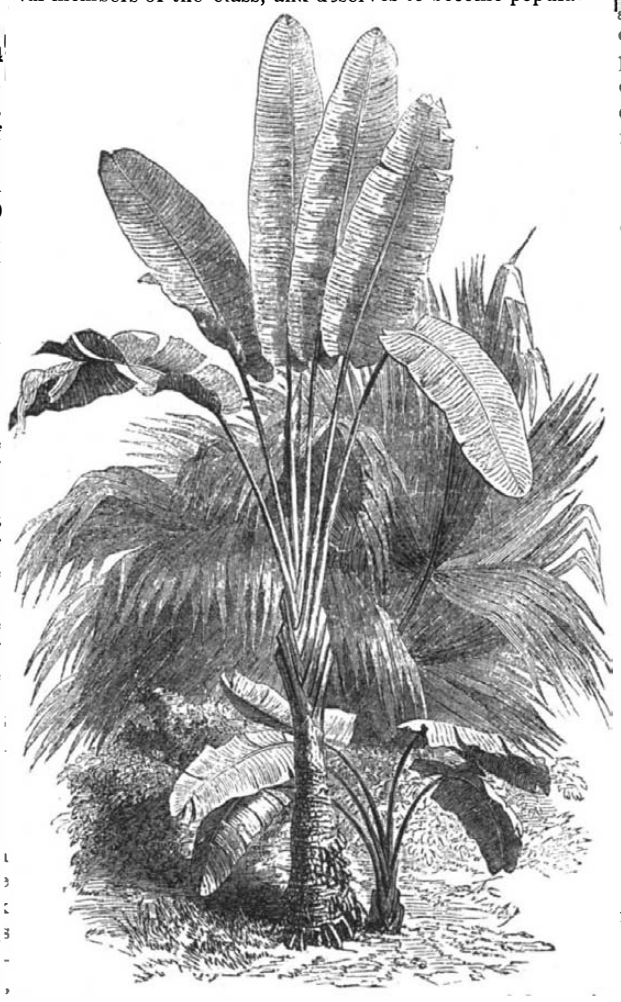

our gardens and conservatories as a striking and decorative foliage plant. It is sufficiently hardy to withstand our climate during the summer months, and grows freely when planted in a richly manured soil and in warm, sheltered positions. In habit, the plant is more robust than of its congeners, if we except *s. augusta,* which frequently attains a hight of from 30 to 40 feet. treated as a warm conservatory plant. Both the last named plants are chiefly remarkable for their fine foliage; but some of the smaller growing kinds, as *s. ovata* and the even more beautiful *s. reginæ,* are well known flowering plants, generally grown in a warm conservatory or in a humid plant stove. These species will, however, both grow and flower well in warm, sheltered positions out-of doors, and form striking objects massed along with musas, palms, and the larger arads. Our illustration gives an excellent idea of the noble port assumed by a well grown specimen of *strelitzia Nicolai,* which is common as a half-hardy foliage plant in many continental gardens.

Railway Speed on Horseback.

A fifty mile riding match lately came off at San Francisco, Cal. between two noted riders, Mowrey and Smith. The *Alta* says: It was a contest, as advertised, for $1,000 a side, with the conditions that each man should have ten horses, and be compelled to change horses, or mount and dismount, in each mile.

Both men were of a tallish, slender build, well adapted to long hours on horseback. Of the two, Mowrey exhibited greater strength and activity, and as an expert in the mode of mounting and dismounting is by far Smith's superior. An evidence of this was clearly perceptible in the fact that he gained on an average not less than two seconds at every change. His style was that of throwing himself from the saddle by a spring from his seat, and in mounting to spring from the ground, assisted by the horn of the saddle and catch his seat while the horse was frequently under full headway. Added to this, he was greatly assisted by having a helper on horseback, who invariably accompanied him on the start and outcome by checking and starting his horse, while Mowrey had only to jump on and off. On the other hand, Smith had little or no assistance, except the equipage of his saddle, which was brought into requisition in a manner that showed conclusively his appreciation of its desirable assistance.

Mowrey came in a quarter of a mile ahead in 2 hours, 2 minutes, 36½ seconds, Smith being 16 seconds behind. The quickest mile was made in 2·04 minutes, the slowest in 3 015 minutes.

A GOOD welding composition is made of borax fused with one sixteenth its weight of sal ammoniac, cooled, pulverized, and combined with an equal weight of quick lime. The compound is sprinkled on the red hot iron, and the latter replaced in the fire.

© 1875 SCIENTIFIC AMERICAN, INC

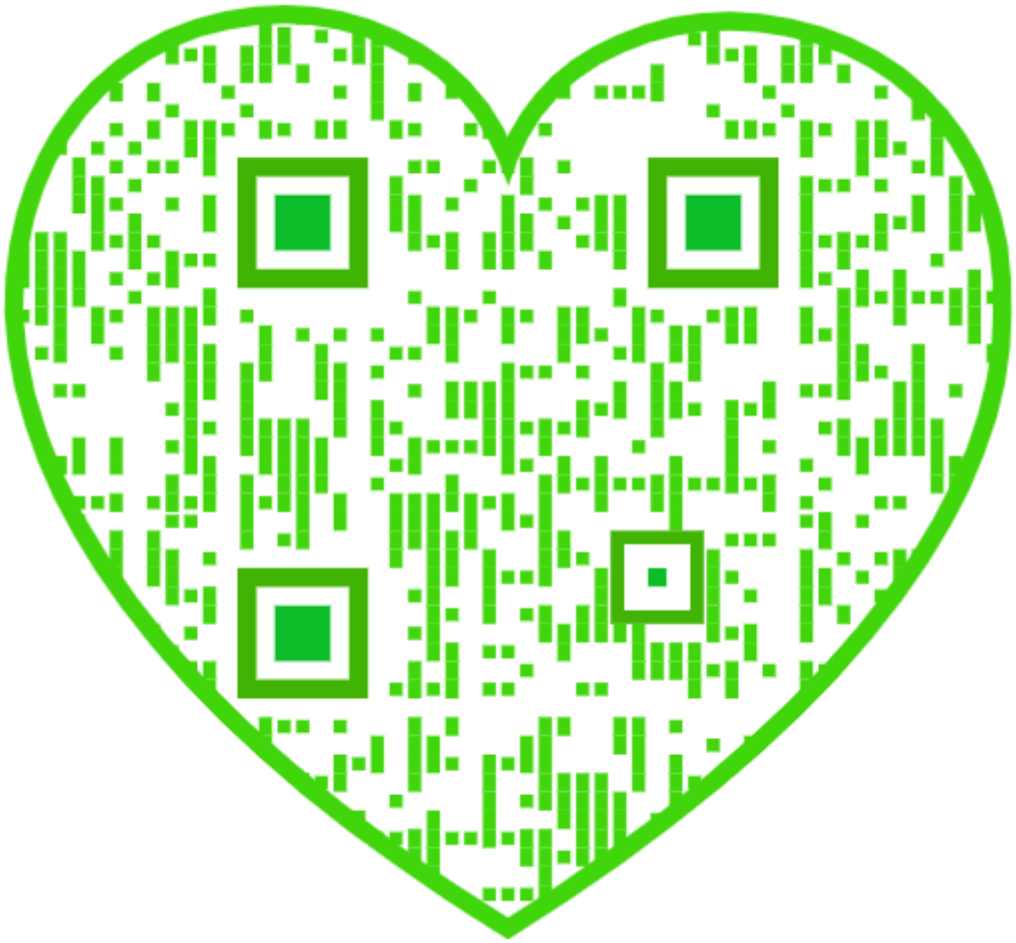

Scientific American.

MUNN & CO., Editors and Proprietors.

PUBLISHED WEEKLY AT

NO. 37 PARK ROW, NEW YORK.

O. D. MUNN. A. E. BEACH

TERMS.

One copy, one year, postage included.....$3 20
One copy, six months, postage included..... 1 60

Club Rates:

Ten copies, one year, each $2 70, postage included.....$27 00
Over ten copies, same rate each, postage included..... 2 70

☞ By the new law, postage is payable in advance by the publishers, and the subscriber then receives the paper free of charge.

NOTE.—Persons subscribing will please to give their full names, and Post Office and State address, plainly written, and also state at which time they wish their subscriptions to commence, otherwise the paper will be sent from the receipt of the order. When requested, the numbers can be supplied from January 1st, when the volume commenced. In case of changing residence, state former address, as well as give the new one. No changes can be made unless the former address is given.

VOLUME XXXII., No. 26. [NEW SERIES.] *Thirtieth Year.*

NEW YORK, SATURDAY, JUNE 26, 1875.

Contents.

(Illustrated articles are marked with an asterisk.)

Absence of mind	405	Horseback, railway speed on	399
Air in water (29)	409	Hygrometer, the (8)	409
Answers to correspondents	409	Induction coil (22)	409
Battery for plating (15)	409	Ink, removing indelible (2)	409
Battery for telegraph (14)	409	Ink spots, removing (33)	410
Battery, small (18)	409	Ivy poison, antidote for	402
Bed bugs, a use for	404	Life-preserving pillow, a	402
Blätter sulphate of quinine (19)	409	Lightning rods indoors (13)	409
Boilers, feeding marine	406	Light, the motive force of	403
Borax in photography (10)	409	Magnet, the steam	405
Broiler, the odorless	406	Mead, S. H., Jr.	404
Business and personal	409	Motor deception, the Keely	400
Cart, improved hand*	406	New books and publications	408
Consumption	406	Nickel-plating	405
Devils, Tasmanian	408	Oils, purifying (20)	409
Diamonds, real and false (11)	409	Palm tree, a beautiful*	399
Discoveries	405	Patent decisions, recent	408
Dyeing gloves (25)	409	Patent litigation, new form of	401
Earthquake in South America	401	Patents, American and foreign	408
Electric coil magnet (27)	409	Patents, list of Canadian	410
Electricity, frictional, etc. (23)	409	Patents, official list of	410
Electricity, the sources of*	404	Railway depot, Grand Central*	399
Electric light (24)	409	Rake, improved vine*	406
Electric plates, mounting glass (10)	409	Soda in bread, etc. (30)	410
Electro-gilding*	405	Sponges, commercial	401
Electromagnets (16)	409	Steam sentinel*	406
Electromagnets, iron for (12, 17)	409	Sulphur in photography (10)	409
Electro-metallurgy*	405	Sunlight and precious stones	404
Electroplating	405	Telegraph cable, the new	404
Electrotyping	405	Thermometer, registering*	402
Ferry system, a gigantic*	403	Tree, cutting at a hight, etc. (34)	410
Gas, lighted and unlighted (7)	409	Velocipede race	404
Gas, lighting by electricity (21)	409	Vinegar-proof walls (1)	409
Glass, Bastie's toughened*	402	Volcanic eruption in Iceland	399
Glass, the Bastie patent	401	Walls, coloring brick (26)	409
Gold and silver for baths (32)	410	Water, clarifying (4)	409
Gravity at a distance (6)	409	Water in pipes, pressure of (28)	409
Gun sight, improved*	406	Welding composition	399

THE END OF ANOTHER VOLUME.

The present issue of this paper closes the first half of the year. Next week we shall commence a new volume.

Some persons to whom the SCIENTIFIC AMERICAN was not previously known concluded six months ago to try it, and to them we say: Now, after receiving 26 numbers costing $1.60, how do you like it? We hope that none are disappointed. We hope that every one feels that he has had a full equivalent for his money. And we hope that all who are satisfied that they have had their money's worth will evince their satisfaction by remitting $3.20 for the coming year, or $1.60 for the next six months.

Clubs may be formed on the usual terms, and the same reduction will be made on a number of names as offered in last January. To all persons who wish to keep apace with the progress of the age, the SCIENTIFIC AMERICAN is indispensable. No other publication contains the variety of valuable reading, and instead of forty-five thousand—our present actual weekly circulation—we think the publication deserves the subscription of one hundred thousand. What say our friends? Shall we have it? It is for them to answer.

Remit, by registered letter, draft, or postal order, to

MUNN & CO.,
Publishers SCIENTIFIC AMERICAN,
37 Park Row, New York city.

THE KEELY MOTOR DECEPTION.

During the past year and a half, we have had occasion, several times, to allude to this latest contrivance, the chief purpose of which appears to be the wriggling of money out of silly people, numbers of whom are found to invest in it—just as they do in lottery tickets—expecting or hoping to win a prize.

The thing was started over two years ago, when it was given out that one Keely, of Philadelphia, Pa., had made a marvelous discovery, namely, a new motive power, in which an enormous force was generated without expense, without the employment of fuel, fire, electricity, chemicals, or other agency; in short, a veritable perpetual motion. The only apparatus involved was a few strong metallic cylinders, containing air, into which water was admitted, when, presto, a cold vapor was instantly produced, having a force of 30,000 lbs. per square inch, more or less, capable of useful application in the driving of all kinds of mechanism. Thus were the days of steam and its costly fuels numbered, and the value of coal property diminished; while settled principles of Science, demonstrated by Joule, Faraday, and other eminent worthies, were toppled over as by an earthquake.

In one of our comments we designated the Keely Motor as one of the perpetual motion deceptions, by which the owners claim to generate a great force out of nothing. We stated that "once in a while they have a juggling exhibition of the thing for the purpose of selling stock. Keely or one of his confederates is the operating juggler. The power 'generator' is a combination of small tubes or cylinders, communicating by pipes. First they run water through, then air, to prove that there is nothing within, and that the show is 'honest.' Then Keely turns a faucet, and 'now you see it.' The pressure gage goes up. He turns again, and 'now you don't' see it. The gage falls."

Transparent as this deception is, it is a serious fact that it has been indirectly countenanced by numbers of intelligent persons; and the implied sanction they have given to it has led many less informed individuals to stake money for its shares.

In the SCIENTIFIC AMERICAN for May 2, 1874, we devoted two columns to an account of one of the Keely performances like that above described, and mentioned the names of C. H. Haswell, W. W. Wood, U. S. N., S. Parish, Joseph Patten, and other engineers and mechanics who were present, and lent their names to its support. Professor Haswell wrote quite an ingenious report in its favor. A force of 10,400 lbs. to the inch was by him certified to have been developed on that occasion. It was then given out that a new apparatus, of still greater power, was in course of construction, to be finished within a few weeks, which would be still more conclusive and satisfactory in its results; that until this new apparatus was ready, and the patents, then in progress, were secured, the matter was not to be fully explained.

Since that time the new apparatus has been completed, several private exhibitions have been given, and the interested parties are now, it seems, desirous of bringing the "great discovery" fully before the public. We judge that this is the case, because they have lately communicated much information to various members of the press.

We take the following, as a sample, from the New York *Times* of June 11, 1875:

[From our own Correspondent.]

Philadelphia, Thursday, June 10, 1875.

"The mechanical and scientific world has been greatly excited of late by the discovery of a new motive power by a Mr. John W. Keely, of this city. The lately discovered motor is generated, as the gentleman claims, from cold water and air, and evolves into a vapor more powerful than steam, and considerably more economical. It is proposed by this new invention to revolutionize the world, and turn machinery topsy-turvy. Steam will be a thing of the past, and the wonderful power of this new creation will supply all the needs of man, for the uses to which steam is now applied Just what this vapor is, and how it is made, the discoverer refuses to make plain, or divulge his hidden secret, until he has letters patent taken out in all the countries of the world which issue patent rights. This service alone will cost about $30,000, and will not be completed until three or four months hence. Mr. Keely is very reticent on the subject of his discovery, and referred your correspondent to his attorney, Charles B. Collier, Esq. The latter gentleman said that a private view of the working of the motor had been made on the 10th of November, 1874, before a number of capitalists, and that only three weeks since another exhibition had been given before a number of gentlemen from the New England States. These latter were so well pleased with the *modus operandi*, and believed so firmly in the ultimate supersedure of steam by the new power, that they formed a stock company, purchased the patent right for the six New England States, and paid $80,000 cash immediately for their share in the invention, and are ready to forward $200,000 more as soon as called upon. They will organize a company with a capital of $3,000,000, and be ready to manufacture the engines and necessary apparatus as soon as the proper patents are secured.

HISTORY OF THE DISCOVERY.

Mr. Keely alleges that the discovery of this power was purely accidental. Up to within a short time he was a poor man, but, having a wonderful degree of natural mechanical skill, he devoted all his time for the past fourteen years to experiments with water with the view of procuring a motive power from it. He was engaged upon an idea of his own regarding the force of columns of water one day, when he accidentally discovered the vapor he has harnessed. He studied the subject, ascertained how it was generated, learned its power, and thenceforth applied himself solely to the perfection of this idea, working night and day, for a number of years, until his efforts were crowned with success. The apparatus by which this power is made is termed a "generator" or "multiplicator," and the vapor is then passed into a "receiver," and from thence to a cylinder box of the engine, where it drives the pistons and sets the engine in motion. The "generator" is about three feet high, made of Austrian gun metal, in one solid piece, and will hold about ten or twelve gallons of water. It is four or five inches thick, and made to stand the very heavy pressure of 20,000 to 30,000 pounds of vapor to the square inch. The inside is composed of a number of cylindrical chambers, connected by pipes, and furnished with cocks and valves. The "reservoir" is about six inches in diameter and forty inches long, and is connected with the "generator" by a pipe which is about one inch in circumference on the outside, with a bore of about one eighth of an inch. Connected with both "generator" and "receiver" is a "standpipe" of brass, about two and a half inches in diameter and three feet high, having a spherical chamber at the bottom, made in two parts, by flanges, and connected to the pipe uniting the "generator" and "reservoir." The vapor generated in the multiplicator is conveyed to the reservoir, which contains numerous pipes, and from there, by a "feedpipe," to the engine. The engine is of peculiar construction; but the inventor claims that the vapor can be attached to any ordinary engine now in use, with very slight alteration. Steam could not pass through the connecting pipes which are used on this apparatus, since the bore is only about the dimensions of a knitting needle. "In five seconds," said Mr. Keely, "I can supply 2,000 pounds of vapor to the square inch, and enough to run a train of ten cars from Philadelphia to New York and return."

With a Keely "motor" attached to a steamer, the voyage of the world can be made without coal.

Mr. Keely says that the first public exhibition will be upon the Pennsylvania Railroad, when he purposes to take a train from this city to New York and return. The cost of the apparatus will range from $500 to $2,500, according to the size and finish desired.

It is evident, from the character of the gentlemen who are interested in the "Keely Motor Company," and the amount of money they have advanced, that they regard this invention as the wonder of the nineteenth century. About four millions of dollars are already involved in the success of this new invention.

The gentlemen interested in the scheme in New York are Messrs. E. T. Throop, Charles G. Francklyn, Charles Lamson, Sergeant & Cuttingworth, W. D. Hatch, William W. Wright, W. B. Meeker, J. J. Smith, A. H. Elliott, John M. Williams, and J. S. Andrews."

The foregoing presents the most recent statements concerning the new motor, as derived from the parties themselves. We will now add a brief "official account" of the actual working of the device, at the great trial mentioned above, made November 10, 1874, as certified by Mr. Collier, the company's counsel and reporter, and published by him in pamphlet form at that time, for the information of the stockholders.

"A short tube, carrying upon its end a reaction wheel or 'Barker's mill,' having two arms of about two and a half inches long each, was screwed upon the reservoir, and, at 9:03 P. M., was put into rotation at a very high velocity, by the manipulation of two cocks. At 9:05 P. M., the reaction wheel was removed, and connection applied to a small beam engine, which was rotated at 400 revolutions. At 9:08 P.M., the reaction wheel was again rotated until 9:09 P. M." The machinery was then stopped, and the gaseous fluid allowed to escape against a candle flame and blow it out. At 9:15, the engine was run again for a few turns. "At 9:17 P. M., the reaction wheel was run again, and at 9:20, the experiments being concluded, the multiplicator was taken apart and inspected by those present. There was no heat perceptible in any part of the apparatus."

The dimensions of the "small beam engine" are not given. It is stated by the learned counsel to have been of "peculiar construction, not susceptible of brief description." Judging from the Barker wheel, with 2½ inch arms this "beam engine" was probably about the size of a dollar toy engine. These remarkable pieces of machinery were, according to this report, run for a minute or two at a time, at various intervals, extending over an entire period of 15 minutes. There was no heat and no noise save that of running water when the ear was placed against the multiplicator.

The report, after giving the foregoing facts in regard to actual performances, summarizes the results, which we condense as follows: 1. The invention produced a series of gaseous expulsions of 2,000 lbs. per square inch. 2. The force was almost instantly produced. 3. It moved instantly through a distance of 12 feet. 4. It was attended with no noise. 5, 6. Nothing was nor could have been introduced into the apparatus to produce the force. 7. No heat, electricity, or galvanic action was discernible, except that electric sparks were observed in the spur gearing of the engine, caused by friction. 8. Hydrant water, 26 lbs. to the inch, was admitted. 9. The water was drawn off unchanged after the performance. 10. The vapor had no smell or taste, and did not burn. 11. The interior of the apparatus was found to contain no residuum or substance other than air and water. 12, 13. The operations were conducted by gas light. Every facility for the closest investigation was offered to the persons present.

The counsel then adds that the object of his report is not to make known the precise nature of Mr. Keely's invention, "nor will this be done until the specifications, drawings, models, etc., now in progress, necessary for the procuration abroad and in this country of letters patent, are completed and deposited."

Following the counsel's signature to this report is a certificate by Wm. Boekel, Mechanician, Wm. H. Rutherford, Chief Engineer, U. S. N., and J. Snowdon Bell, to the effect that they were present, that the report of the facts is correct; and the conclusions of Mr. Collier, given in the summary, they say "we fully endorse, as being, in our judgment, the correct conclusions." A certificate from B. Howard Rand, M. D., Professor of Chemistry in Jefferson Medical College, is then given; the Professor says he has read Collier's report, and certifies that the "absence of heat, electricity, or galvanic action as resultants, together with the negative qualities of the produced gas or vapor, lead me to the conclusion that the result, alleged to have been produced, was by some agency or power not known at present to chemists."

The opportunities for the acquisition of knowledge by this Jefferson College Professor seem to have been very limited.

We have given above the latest accounts of this latest attempt to impose upon the credulity of the public, as written by the parties themselves and backed by their willing as

© 1875 SCIENTIFIC AMERICAN, INC

sistants. The deceptions of the whole scheme are so transparent that it hardly seems credible that persons of sane minds can be found who are willing to invest. Nevertheless, we hear from a reliable source that quite a number of well known business men have invested money in the scheme, and in one instance we were told so by the party himself. He had paid five thousand dollars down, and fully believed the thing to be a great discovery, and expected to realize a large fortune from his investment. On all other subjects this gentleman was rational and intelligent; but in respect to the Keely motor he was badly hallucinated. He was present at the trial above referred to, saw 2,000 lbs. on the gage, and came away perfectly satisfied.

The question is asked: How could so great a pressure as 2,000 or 10,000 lbs. per square inch be produced, allowing that it really was exhibited as stated? We think that any ingenious mechanic, by means of a hydraulic jack and a small pipe, could readily produce and exhibit such a pressure, and could, by turning a faucet, drive a whirligig for the space of sixty seconds, or from 9:08 P. M. to 9:09 P. M., as the learned counsel gravely reports.

Keely, it will be noticed, talks about his studies regarding the force of columns of water, and describes the use of water pressure in his "generator," "multiplicator," "receiver," etc. Well, now, Keely might, if he wanted to, get up an honest show of air pressure by arranging a series of short water tubes so as to concentrate the combined weight of their water against air confined in a suitable chamber. Allowing, for example, that he had ten communicating water tubes, each holding a cubic foot or 62 lbs. of water, he might, by turning a faucet, fill the tubes from the hydrant, and concentrate 620 lbs. weight on the confined air, which, if conducted to a gage, would indicate 620 lbs. pressure; this air might drive a small wheel from 9:08 P. M. to 9:09 P. M.; it would moreover be a cold vapor, without smell nor taste; it would blow out a candle, but not burn; there would be no noise except that of running water; there would be no residuum save air and water; no heat, electricity, or chemical action would be involved.

A curious arrangement of water and air tubes, in which, by turning faucets, the water weights are concentrated, producing pressure, was illustrated and described in the SCIENTIFIC AMERICAN of April 4, 1868, page 212. It was patented by James R. Cole, of Tennessee, December 10, 1867, as a water elevator. It might be bad for Keely, if he should prove to be an infringer of this patent.

There is also a patented arrangement of mercurial tubes for concentrating the weight of mercury and air columns in an analagous manner. We allude to Quinn's patent steam gage, 1866. It is possible that Professor Rand, Professor Haswell, Chief Engineer Rutherford, U. S. N. Chief Engineer Wood, U. S. N., and other advocates of the Keely motor, are not acquainted with these devices.

One of the strangest developments connected with the Keely motor is the implicit faith which many gentlemen, in this community, of tried experience and business capability, have given to the enterprise. They have yielded not only faith but their money. We can account for this only by supposing that they mistake mere *pressure* for motive power. But mere pressure is not motive power, it is simply a resultant of motive power. A very slight motive power, if sufficiently long continued and properly applied, may produce the greatest pressure. A weight of only a single pound, hung upon the extremity of a suitable lever, is sufficient to produce a pressure, at the opposite end of the lever, of 10,000 lbs., or more, to the square inch. To persons not familiar with the laws of mechanics (and this, we think, is probably the situation of most of the Keely investors), the exhibition of a gage, showing 10,000 lbs. pressure, might readily be regarded as proof positive of an enormous power behind the gage; whereas the actual power, concealed from view, might be only a weight of one pound.

In cases of this kind, when a body is lifted or a pressure produced, the inquirer should take pains to ascertain what the extent of the original moving power or weight is. If this precaution be taken, the falsity of motors like Keely's may be at once detected. In the example of Keely, the certificate of Collier shows that a hydrant force of 26½ lbs. to the inch is always required to run the machine. This force, if applied to a common wheel or engine, would produce a considerable amount of constant mechanical power. But the moving force is nearly all wasted in Keely's device, for he is only able to drive a toy engine for a minute or two at a time. This does not look much like driving a train of cars from Philadelphia to New York, or crossing the ocean without the consumption of coal.

THE BASTIE PATENT GLASS.

We publish on another page an account of some recent experiments with this novel material, together with the inventor's account of the process as contained in his patent, from which we also give a drawing of one of his furnaces. The apparatus consists of a chamber for heating the glass very hot; and while in this condition, it is quickly plunged into a hot tempering bath of oil, wax, resin, tar, or pitch. This seems to be a simple and easily executed process, which if practically effectual, ought not to increase the expense of the glass but very little. The owners of the patent claim that 5 per cent above the ordinary cost of glass will cover the expenses of the improvement. On this point, we shall hope, ere long, to have further information.

It would appear that Professor Egleston, of Columbia College in this city, who has been employed by the patentee to show up the merits of the new glass in public, and who has been very successful in this part of the matter, has not, during the two months that he has been engaged, made any personal experiments with the simple process itself. All that he has done is to exhibit glass, brought from France, furnished by the patentee, testing them with samples of common glass picked up in the shops here. Whether the patent glass tried by Professor Egleston was in part strengthened, as glass sometimes is, by ingredients and treatment used in its manufacture, or consisted only of common glass, subsequently treated by the new process alone, the experimentor was unable to say. The statements of the patentee in respect to the economy and practicability of improving common glass, on a commercial scale, have yet to be demonstrated.

The patentee's agents in this country deny that the alleged invention of Mr. Pieper, mentioned in an item in our paper of June 12, had the effect to arrest the negotiations for the sale of Bastie's patent in Germany. On the contrary, they inform us that the sale of Bastie's process to the German glass makers was concluded on May 9th.

A NEW FORM OF PATENT LITIGATION.

In a recent article, commenting upon the relative number of patent litigations in England, where they grant a patent to every applicant, without official examination, and in this country, where we reject over five thousand applicants for patents yearly, and employ a standing force of five hundred officials to examine, or assist the examiners, we showed that in England, out of thirty thousand law cases yearly, only eight were patent litigations. We further intimated that a very large amount of patent litigation, of a character wholly unknown in England, was carried on here, and was a necessary adjunct to our present system. We allude to the litigations before the Patent Office, such as re-examinations, appeals to the Board of Examiners, interferences, appeals to the Commissioner in person, appeals from the Commissioner to the District Court, etc.

A new wrinkle in this sort of litigations, and a new direction for appeals, has lately appeared, which seems to indicate that the time has come when Congress should, by the adoption of wise legislation, put an end to this whole business of Patent Office quarreling.

Among other duties of the Secretary of the Interior, he is required to sign all patents after they are prepared, passed, and approved by the Commissioner of Patents.

On a recent occasion, when the Commissioner, after a long and full argument of the matter before him, had decided the case of Prescott *vs.* Edison, in favor of Prescott, ordering a patent to issue in the joint names, the defendant applied to the Secretary of the Interior and petitioned him not to sign or issue the patent. The subject of controversy was a telegraph apparatus. The Secretary granted the request, and decided to hear the argument. This was on the 20th of March, 1875, and no decision has been as yet reached. Meantime the contending parties have marshalled their legal forces before the Secretary, consisting of six of our most able and expensive lawyers, have argued and re-argued, and have filed scores of pages of printed fol-de rol upon the subject, for the Secretary's consideration. If one dissatisfied applicant may thus occupy the Secretary's time, all applicants ought to have the same privilege. If the Secretary may nullify one legitimate decision of the Commissioner of Patents, he may nullify all.

The money costs of this one litigation before the Commissioner and the Secretary are stated to have reached, at the present time, over fifty thousand dollars. Jay Gould, it is said, is an interested party on the one side, and the Western Union Telegraph Company on the other. Jay is doing all he can to injure the Western Union Company by running down its stock and inflating the stock of a rival company, of which he owns the control.

This case is a little more prominent and has been more expensive than many that are litigated at the Patent Office. But it is notorious that a very large proportion of the time of the Patent Office officials is devoted, in one way or another, to these litigations, which, in the aggregate, involve great expense, but would become obsolete, as they are in England, if we were to adopt the English system of permitting the applicant to make his own examination if he so desires, but confining the duty of the Patent Office to the prompt issue of a patent to every applicant whose papers are presented in proper form.

It is alleged by the advocates of the American system that, if our official examinations and Patent Office wrangles were abolished, then the courts would be overwhelmed with patent litigations. But the experience of other nations shows that no such result would ensue. In England, as before stated, they have only eight patent litigations before the courts per annum; while in France, Belgium, and other countries, where no official examination and no Patent Office litigations take place, the number of patent cases brought before the courts is very small.

COMMERCIAL SPONGES.

It is sad to consider how much we lose in every walk of life through lack of a little observation. There are few stonemasons who, like Hugh Miller, are led to become noted geologists by noting and studying the beautiful fossils in the stones they chisel. A butcher may cut up beeves and porkers by the hundreds, or a fisherman spend a long life on the shore, without noticing the most obvious points of interest and instruction in the physical structure of his victims; and only when a naturalist calls his attention to the beautiful adaptations, which have before passed unnoticed, will he have his interest profoundly excited, which may ever after give him a new motive and zest in his work. The most of us will use sponges in an indefinite variety of ways, all our lives, without even once stopping to think how they were formed; whether they are plants, animals, or neither, or what are their history and habits.

The ordinary sponges of commerce, which we use so extensively, have but little resemblance to animals or plants, and belong to a class of organic bodies concerning the affinities and proper classification of which there has been much doubt. And this doubt has led naturalists to apply the question-begging appellation of zoöphytes, or plant animals, to these and similar organisms. They are now generally considered members of the animal kingdom. The parts we use are the mere skeletons, composed of a kind of horny substance. The animal itself is a soft, jelly-like, amorphous mass, which fills up all the intercellular spaces, lines the tubular canals, and forms a jet black or sometimes a dark purplish skin on the outside, covering the whole skeleton, excepting the larger openings, which project beyond its general surface. In this form the sponge exists in the water, and, out of its native element, is hard and glistening on the outside, and very strongly resembles a piece of liver.

The mode of life in this low order of existence, which is regarded as a compound animal, is very simple, and we would be disposed to call it extremely uneventful. Sponges grow, by a kind of lichen-like root, to some foreign object on the sea floor, and never move from their position; they have no power to contract or expand their body as a whole, or any part of it: and they are quite insensible to every sort of irritation. Their only power seems to be that of absorbing large quantities of water, which they again yield up on pressure without any injury to their texture. The water, which permeates their whole mass, and maintains a constant circulation through it, keeps the skeleton soft and elastic, brings to the animals the air and food on which they subsist, and carries away waste matter from the body.

On examination of a sponge skeleton, it will be seen that the porous surface is finer and of closer texture than the interior, that there are large apertures scattered indiscriminately over the surface, and between these are much finer openings, covering the complete outer surface of the sponge. The latter are called pores, and serve as channels of entrance to the water, which, after circulating through the body by means of the tortuous and branching canals which make up its inner skeleton, passes out at the larger openings. These chimney-like apertures are called *oscula*, but the name is a misnomer, for they are, in reality, vents. They vary in number in the different species, and are sometimes reduced to a single one. By what force the water is made to circulate through the sponge mass is not definitely known. Some have attributed it to vibratile ciliæ, planted within the porous canals which, by their motion, create a circulation in the water. Others ascribe it to the principle of osmosis, by which membranes of all animals, and many other porous substances transmit fluids and gases according to their density and power to act on the transmitting substance.

When obtained for commercial purposes, the animal matter can be removed by soaking it a long time in salt water and then—after it is rotted by this means—rinsing it out. This leaves the horny skeletons just as we use them.

The finest sponges of commerce come from the Mediterranean sea. Our best bath sponges are doubtless from this locality, but the coarser sponges we see most commonly are largely from the coast of Florida or the Bahama Islands. Sponges are found abundantly in tropical waters generally, and perhaps nowhere more abundant than in the seas of the Australian islands. They gradually decrease in numbers towards the colder latitudes till they become entirely extinct. They vary much in shape. Some are beautifully shaped like a vase, others are semi-cylindrical, others nearly flat like an open fan; some are branched like the opened fingers of a hand, and are called glove sponges, and in others these branches seem to be reduced to only one, which is shaped somewhat like a club. These different shapes may belong to one species, and the differences are due, so far as known, to the fact that the first mentioned are found in deep water, and they grade, in the order described, up to the last, which grow in much shallower water.

Sponges are not confined to recent seas, though the commercial ones are not known to have existed earlier, because the keratose matter furnishes hardly favorable conditions for petrifaction. In the oölite and chalk formations, sponges containing flinty spicules were very abundant; and in most of the earlier formations, large sponges containing calcareous spicules abounded. These very closely resemble corals, and have been mistaken for them by some of our best geologists. The spiculæ or needle-shaped particles, which are often microscopic in size, are not thrown in without order, but are arranged to support the skeleton. The horny sponges do not secrete or deposit spicules, but these are sometimes found within the skeleton in broken and disordered form, which shows they were taken in from without.

There is an elastic sponge, as it is called, that is somewhat largely used now as a substitute for curled hair in stuffing beds, cushions, car seats, etc., but this is an entirely different thing from the sponge of commerce. Before it was used for this purpose, it was a worthless sea grass, growing abundantly among corals in rather shallow water.

Terrible Earthquake in South America.

It is reported that an appalling earthquake has lately taken place on the Venezuelan frontier of New Grenada. The destruction was severest in the Valley of Cucuta, in the province of Pamplona, latitude 7° 30′ N., longitude 72° 10′ W. It is said that 16,000 lives are lost by the calamity.

A PUTTY of starch and chloride of zinc hardens quickly, and lasts, as a stopper of holes in metals, for months.

© 1875 SCIENTIFIC AMERICAN, INC

A NEW REGISTERING THERMOMETER.

This new apparatus, represented in our engraving, is designed to measure and register the temperature of ocean depths, of deep borings, or other inaccessible places, or of any locality at any desired time. It is composed of a mercurial thermometer, curved in inverted V shape, and fixed on a scale graduated to Fahrenheit degrees. The cylindrical tube which contains the mercury is slightly bent at the zero point. The instrument is connected with a clock, on the lower portion of the dial of which is a supplementary hand pointing to the numbers 1 to 12. By placing this pointer at any determined number, when that hour is reached the clockwork causes the thermometer to revolve one revolution. The effect of this is to break the mercurial column at the bent portion at 0°, and turn it into the other leg of the tube, where it remains, its hight indicating the temperature at the time for which the dial was previously set.

This will be more clearly understood from the illustration. The figure on the left shows the apparatus set to indicate the temperature at 11 o'clock, the time of setting being 10:45. On the arrival of the hour, the thermometer turns as shown by the arrows in the second figure; and the mercury, passing out into the other leg, remains at the point it then marked on the scale.

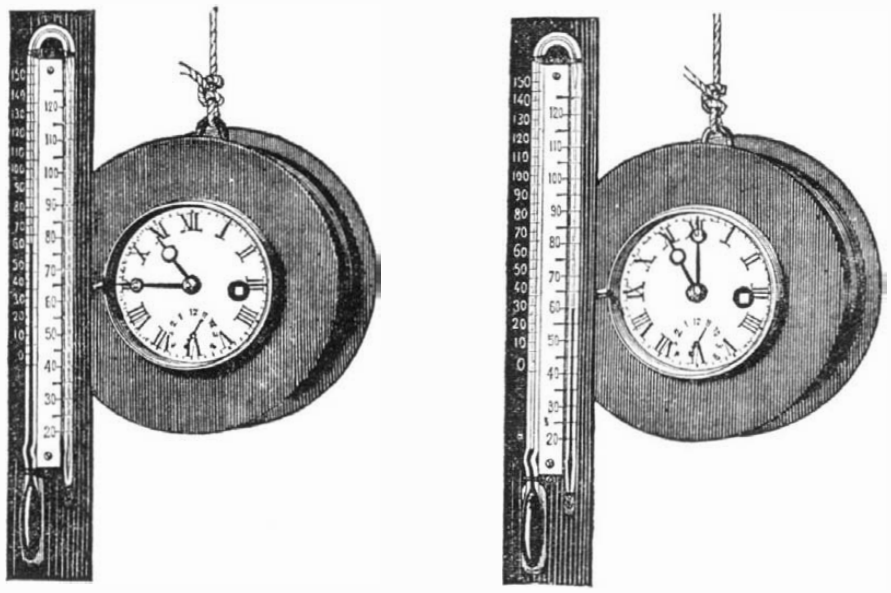

REGISTERING THERMOMETER.

THE BASTIE TOUGHENED GLASS.

We recently witnessed a number of interesting experiments upon the Bastie toughened or tempered glass, exhibited by Professor Thomas Egleston, of the School of Mines of Columbia College, in the presence of an audience composed mainly of the glass merchants of this city. Professor Egleston has been investigating the properties of the new material for two months past; but his experiments, though tending to show the remarkable strength of the glass, have given him no information as to the correctness of the process by which the article is prepared. The mechanical apparatus alleged to be used in the process is given in the annexed engraving from the patent drawings.

We summarize Professor Egleston's experiments briefly as follows:

(1). Impact of elongated rounded end steel balls entirely inelastic, with plates secured horizontally: (*a*) Weight of ball, 2 oz. Best English plate glass, $\frac{1}{18}$ inch thick, broke at fall from hight of 15 inches. Bastie glass of equal thickness broke at fall from 4 feet 6 inches. (*b*) Four oz. ball. Ordinary glass broke at fall from hight of 1 foot. Bastie glass broke at fall from hight of 3 feet 6 inches. (*c*) One lb. ball. Ordinary glass broke at fall from hight of 13 inches. Bastie glass broke at fall from hight of 3 feet. The thicknesses of the glass varied in these several experiments, but in each one the Bastie and the common glass were identical. (*d*) Plate glass inclined at about 45°; a low quality glass, such as used in conservatories, was employed. Two oz. ball. Unprepared glass broke at fall of 4 feet. Bastie glass, after withstanding 36 shocks at one point, ruptured with a 9 feet fall. (*e*) Eight oz. ball. Common glass, ¼ inch thick, broke with a fall of 3 feet 9 inches. Bastie glass, ¼ inch thick, broke with a fall of 7 feet.

(2). Weight applied at end of a strip, 3 inches wide and $\frac{3}{16}$ inch thick, secured in a vise. Common glass broke at 16½ lbs. Bastie glass broke at 46 lbs. Power was applied at a distance of 6 inches from vise.

(3). Weight applied at middle. This experiment failed owing to lack of necessary weights. A strip of Bastie glass, same size as the foregoing, however, withstood 180 lbs. and gave no signs of rupture.

(4) Heat. Lamp chimneys prepared were heated over Bunsen burners to very high temperatures without rupture. Plates and saucers were similarly treated. A plate of prepared glass, about 1 foot square, was subjected to a blowpipe flame of 1,500° Fah. for about 8 minutes. Ordinary glass broke in 7 seconds. The outer edges of the Bastie plate, for a distance of an inch or more, were cool. The spot touched by the flame became barely red hot. On cooling, the plate cracked just at the heated point, and five minutes later it disaggregated throughout its entire area.

Water suddenly thrown on a heated prepared plate caused the latter to break. It appears that, when the glass is cooled quickly at the rate of 300° or 400° Fah. at a time, it breaks; but when the operation is conducted slowly, at intervals of 50°, rupture does not occur.

Referring to experiment 1: The force required to break the glass is best expressed in foot lbs. In better tests than those quoted, Professor Egleston found that ordinary glass broke at 1·6 foot lbs. Bastie glass bore 3 foot lbs., nearly double. Using a 1 lb. knife-edge weight, ¼ inch Bastie glass broke at 17 foot lbs. From experiment *d*, it will be noted that constant hammering on one spot is without effect. With reference to experiment 2, according to Professor Egleston, the glass has supported as high as 60 lbs. Experiment 3 has been conducted with a knife-edge bearing on the glass, when as high as 200 lbs. has been applied. A remarkable feature of the glass is its rupture, which is a general disaggregation of the entire piece. As the weight falls, a metallic resonance is heard; but on breaking, there is a dull crush, utterly unlike the sound caused by fracturing common glass. The rupture takes place everywhere apparently, in perpendicular and horizontal planes, a cleavage, in fact, very much resembling that of trap rock. The fragments, moreover, are destitute of sharp edges. The hand may be plunged in a vessel full of them, or they may be rubbed between the palms, with impunity.

It is claimed that there is no difficulty in polishing the prepared glass, a fact evidenced by a number of watch crystals and other articles exhibited. It may be etched with hydrofluoric acid or engraved with the sand blast, without becoming impaired in point of strength. It cannot be cut with the diamond, as the removal of a part of a piece determines the immediate rupture of the whole; so that window panes and like articles will have to be prepared in the first instance of the proper size. It may be used for photographic negatives; and finally it has, it is said, withstood for several days the action of a cupel furnace at white heat. Window panes of this glass, it is alleged, will be almost as much protection to buildings as iron shutters; since they would shut off the oxygen until the window frames became entirely consumed. The cost of the process is stated to be about 5 per cent additional to that of ordinary glass, so the holders of the patent affirm.

The following is from the specification of the patent as granted in this country December 15, 1874.

"To all whom it may concern:

Be it known that I, François Barthelemy Alfred Boyer de la Bastie, of Paris, France, have invented a new process of tempering flat and shaped glass, and furnaces and machinery to be employed therefor, of which the following is a specification:

This invention relates to a process of tempering glass and glass articles so as to render them less fragile, and to the construction and arrangement of furnaces for effecting the said process.

As the fragility of glass results from the weakness of the cohesion of its molecules, it may be expected that, by forcing the molecules closer together, and rendering the mass more compact, the strength and solidity of the material should be increased.

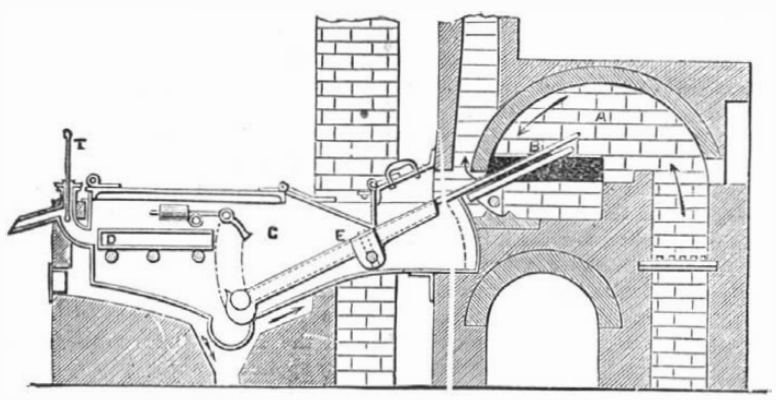

BASTIE'S APPARATUS FOR TOUGHENING GLASS.

I have found that this cannot be effected by compression, even when applied to the material in a fluid or soft condition. I have, therefore, applied to glass a system of tempering, such as is usually applied to steel, and I will now describe the process and apparatus for this purpose.

Fused glass dropped into water becomes greatly contracted, but, being shapeless, only objects of curiosity can be produced in this way. The sudden cooling in the water puts the glass into a state of unstable equilibrium in its constitution, so that the least shock causes it to break, as in the case of Prince Rupert's drops.

My object is to invert the result, to diminish, or even to remove, the extreme fragility of glass, by tempering it by immersion in a liquid. In attaining this object two essential conditions have to be determined: First, the point at which glass can be tempered without being put out of shape. I have found this to be when it is just at the heat where softness or malleability begins, the molecules being then capable of closing suddenly together, condensing the material, when it is plunged in a liquid at a considerably lower temperature.

Also, glass, when it is thin, may be tempered at red heat, even before becoming soft. Secondly the liquid to be employed for the immersion of the glass is to be such as can be heated much higher than water without boiling. For this purpose I find oils and grease, wax, resin, and tar or pitch suitable. Having settled these conditions, I have devised the process or practical method of operating, and suitable furnaces, which will hereafter be described.

In carrying out the process, it is necessary that the glass to be tempered should be raised to a very high temperature. The hotter it is, the less is the risk of breaking the glass, and the greater is the shrinkage or condensation. Hence the advantage, and often the necessity, of heating the glass to the point of softening, which is attended by the difficulties that glass in the soft condition gets readily out of shape, so that it must be plunged almost without touching it, and that, in plunging the hot glass into a heated combustible liquid, the latter is apt to take fire and cannot easily be extinguished, so that time and material are lost. These difficulties I have overcome by placing the tempering bath in immediate communication with the heating oven, and covering it, so as to prevent access of air. The oven being charged with the articles to be tempered, these are pushed or caused to slide into the adjoining bath without handling them, and the liquid of the bath, having no supply of external air, is not liable to inflame. In order that the shape of the tempered articles may not be affected, particularly for flat glass, the floor of the oven is made to cant, so that, when the glass is heated on it, it is turned to a sloping position, and the glass slides into the bath along a surface therein arranged at the same slope as that of the oven floor. Small articles may be heated on the edge of the bath and immersed by a slight push. The clearness of the glass may be affected by the dust of the furnace flame, which is apt to settle on glass and chill its surface. I avoid this by heating the glass in a muffle, to which the flame has no access, being applied externally. Moreover, the shock of the fall of glass into the bath is prevented by fixing therein a sheet of wire gauze or asbestos fabric, or providing a bed of sand or other like material for the glass to fall on."

The patent drawings contain three figures, one of which we give, and explain briefly as follows:

The sheets of glass are placed in a preparatory oven, and thence, one by one, pushed into the oven, A, by an opening, shown in black. On reaching the requisite temperature, the glass is carried upon table, B, which is normally horizontal though shown in a position for sliding the sheet off. C is the bath of oil, heated by a separate furnace, and so covered as not to be affected by heated gases proceeding from the furnace. A rocking table, E, is supported on a frame moved by a lever and shaft. This is placed in the position shown, and the table, B, is tilted by means of a lever, when the plate of glass slides off on to table, E, and so into the bath. Table, B, is then returned to its horizontal position, and another plate pushed upon it The sheet in the bath is removed as follows: The table, E, and rocking frame are raised; and by suitable mechanism, the table is separated from the rocking frame to such an extent that the buffer of wire gauze on the frame and end of the latter are brought below the level of the table, which is held up by a latch. The plate is then withdrawn by a rake into the chamber, D, whence it is removed with others, when the chamber, being full, is lifted out of the bath.

The claims made by the patentee are as follows:

1. "The process herein described for tempering glass consisting in the immersion of the hot glass in a bath of oils, grease, wax, or resinous or bituminous substances, the boiling temperature of which is above the boiling point of water.

2. In combination with the oven for heating and the bath for plunging, communicating with each other, the rocking table, *e*, substantially as and for the purpose specified.

3. In combination with the heating oven and plunging bath, the tables, *e* and 19, substantially as and for the purpose specified.

4. In combination with the heating oven and plunging-bath, the rocking table, *e*, and the receiver, *g*, substantially as and for the purpose specified.

In testimony whereof I have signed my name to this specification before two subscribing witnesses.

F. B. A. ROYER DE LA BASTIE."

A Life-Preserving Pillow.

A new life-preserving device, which seems to be both simple and practical, has recently been introduced in the Glasgow and Montreal line of emigration steamers. It consists of two pillows of prepared cork wood, with an upper padding of hair covered with mattress tick. The pillows are attached to each other in such a manner that, when about to be used, they can be placed one on the back and the other on the chest and tied, the head and shoulders thus being kept above water. The device has been tested and has been found capable of supporting the heaviest men breast high. The pillows are utilized as articles of bedding, so that they are always at hand in case of danger.

SWEET OIL rubbed on the skin is said to be a sure antidote for ivy poison.

© 1875 SCIENTIFIC AMERICAN, INC

A GIGANTIC FERRY SYSTEM.

Mr. Evan Leigh is another inventor who comes forward to solve the problem of making the passage from England to France rapid and comfortable. He proposes to build vessels large enough to carry three passenger and one freight trains each, as shown in our Fig. 2, so that passengers need not leave their seats at the port of embarkation or of arrival. To enable trains to go on board such vessels, a pontoon of great size would be necessary, and the descent to it would be necessarily very gradual, lest the train acquire sufficient momentum to work damage or destruction to the ship.

The steamer is proposed to be 500 feet long and 90 feet wide amidships, as it is hoped that this great length will prevent pitching, while it is also expected that the corresponding breadth of beam will overcome the tendency to roll, which, in the narrow-sided vessels, presents an almost insuperable difficulty to the performance of a direct passage. As will be seen from Fig. 2, showing a transverse section of the boat, she is almost flat-bottomed, and her dimensions have been so calculated that she will only draw six feet of water when loaded. The chief inconvenience which such a boat might suffer in a gale is that the force of the wind, falling upon the immense surface presented by the broadside (as the tops of her bulwarks stand about 25 feet out of the sea), might, to some extent, interfere with the steering. To render the steering of the vessel all the more efficient under this difficulty, Mr. Leigh follows one of his own patents by fixing a rudder at each end of the keel, so connecting them together that one cannot move without the other moving in the opposite direction. Each rudder is also provided with a valve to diminish its area when required, which valves are so arranged that when one is open the other is shut, in order to balance the rudders to a nicety. Moreover, Mr. Leigh proposes to fit his boat with a pair of engines of 5,000 horse power capacity; each of these engines will drive the paddles independently of the other, so as to use the latter for steering the vessel independently of the rudder, by giving out more steam to one pair than the other, and so on. The boat is to carry a steering house at each end of the upper promenade. These arrangements leave the steersman the option of steering by steam or by helm, or by both together. The steering houses contain each three cabins, one for the captain, another for the steersman, and the third for the mate. The boat will not carry masts, spars, or riggings of any kind, in order to prevent top heaviness, and her capacity is measured at 8,000 tuns. Mr. Leigh, instead of employing the usual paddle wheel, introduces a paddle of his own contrivance, in the hope of saving power; the paddle wheels are 18 feet broad and 24 feet in diameter, with floats 21 inches deep, which are fastened to a cast iron cylindrical shell forming the wheel. The boat is to be propelled by inside paddles, so that the sides may be free from external projections. Four sets of rails are laid on the lower boat deck; three of these sets of rails are intended to carry the goods traffic, while the fourth is set apart for the passenger train, which alone takes its locomotive on board. The platform is raised on each side of the outer rails to a convenient hight for getting into the carriages; and sets of saloons, waiting, and refreshment rooms, affording accommodation for 1,000 persons, are fitted, on one side in the English and on the other in the French styles. Referring to Fig. 1, which represents the ferry boat at sea, the upper decks are seen connected by galleries at each end, thus forming a promenade of 350 yards length round the vessel; and underneath the first and second class saloons, those of the third class are fitted up.

When the boat enters the dock, the sliding doors at each end of the vessel are opened, and, by a self-acting process, the lines of the rails on the vessel become at once closely connected with the corresponding set on the inclined bridge; and while the steamer is awaiting the arrival of the passenger train, goods trains are run on board. As soon as the mail steams on to the boat, the gates are closed, the brakes applied to all the cars, and the vessel sails out of the dock. Arrived at her destination, and as soon as a similar connection with the main lines has been effected, the mail train steams out at the other end of the vessel under the top promenade of the ferry boat on to the existing lines of railway.

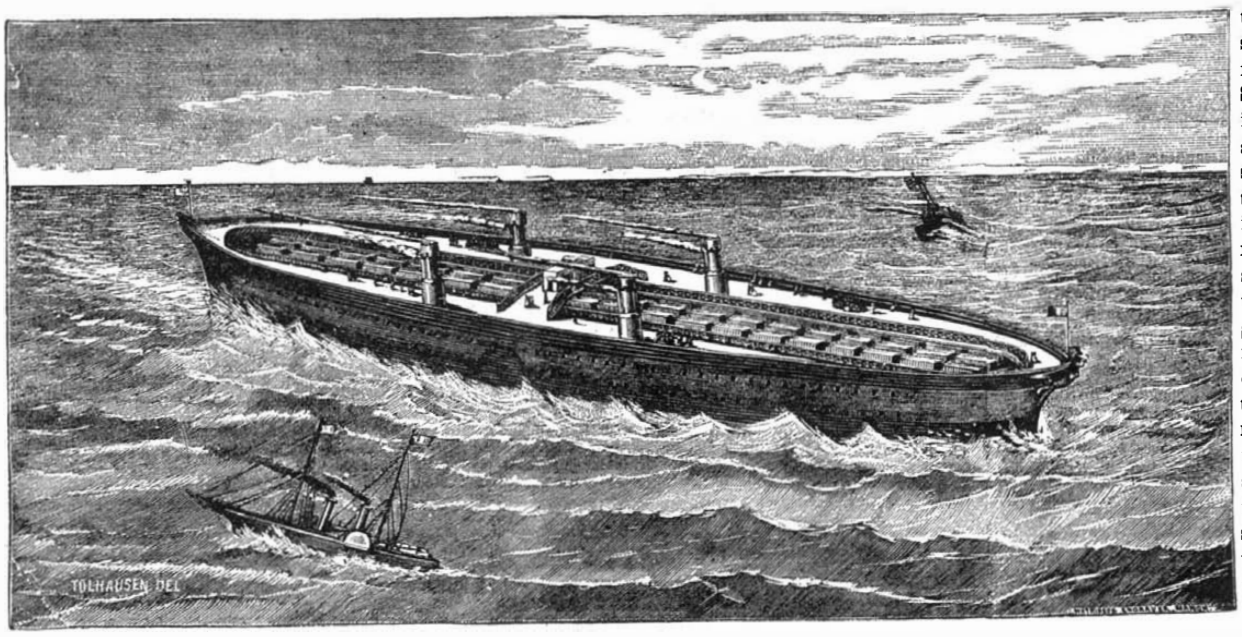

LEIGH'S CHANNEL FERRY. THE BOAT AT SEA.—Fig. 1.

THE MOTIVE FORCE OF LIGHT.

In our number of the SCIENTIFIC AMERICAN for June 19, we gave engravings of the remarkable rotary instruments of Dr. Crookes, which are put in operation by the mechanical power of light, given off by a candle, lamp, the sun, or other source of illumination. The following summary and comments upon the marvelous discovery of Dr. Crookes we find in a recent number of the New York *Times*:

At a meeting of the Royal Society of Great Britain a few weeks ago, Mr. William Crookes, F.R.S., who had previously communicated some interesting facts on this subject, read a paper which may give rise to much more important discoveries, perhaps, than any contribution to celestial mechanics since the law of gravitation was demonstrated by Newton. It has always been assumed, and Dr. Balfour Stewart and other authorities have affirmed, that light, apart from heat, has no mechanical force whatever. This old theory is overthrown by Mr. Crookes, who for some years past has been making experiments, and has at last constructed an ingenious apparatus, by which he shows the power of luminous rays to drive round and round a little vane when the heat rays are excluded, being thoroughly sifted out by means of a screen of alum. We abridge from the London *Telegraph* the following account of one of the experiments, and regret that our space does not allow a more extended notice of the phenomena submitted to examination before the Royal Society:

With an air pump Mr. Crookes first exhausts a tube with a bulb at its end, and in the bulb he mounts, upon a delicate pivot, a little vane of glass or straw. This vane is made in the form of the letter X, and on each of its four arms is mounted a disk of pith, blackened on one side. The use of this blackened surface is ingenious, as will be presently seen. As soon as the machine is ready, it is exposed to the sunshine, when its disks immediately become endued, as it were, with life. They revolve around their common axis just as the planets revolve about the sun in the orrery. What is the motive force in this beautiful experiment? It is not heat. For, as before observed, the heat rays can be sifted out by the alum screen without stopping the rotation of the machine. The atmosphere and its changes have nothing to do with producing the motion. Professor Osborne Reynolds some time ago suggested that the disks revolved because there was a a latent moisture in them which, being evaporated in the experiment, gave a resilient impulse to the little orrery. To refute this theory, and, at the same time, to show that the sole motive force engaged in driving the orrery was the luminous rays of the sun, Mr. Crookes exhibited a machine made wholly of platinum which had been heated to redness while under continuous and absolute exhaustion. The disks being made of platinum, instead of pith as before, revolved as obediently as the disks of pith; inasmuch as they could contain no appreciable amount of latent moisture, the theory of Professor Reynolds was, of course, exploded. The final result was that light is now acknowledged for the first time as one of the mechanical forces, and such eminent men as Professors Stokes and Huxley, Dr. Carpenter, Mr. Norman Lockyer, and others, agree that the demonstration was perfect.

Another point of importance is that the force which light delivers is not like the force of gravitation, but differs from it in several essential respects. One of these is that, while gravitation attracts and gives a centripetal impulse, the force of light is centrifugal, and repels or pushes away the objects on which it is delivered. Thus the black side of the disk is pushed from the sun, and the orrery of Mr. Crookes is kept in constant rotation so long as the light waves dash themselves against the black surface and drive it before them. Shut out the light by covering the machine with a hat, and the rotation instantly stops, to be renewed again the moment the obstruction is taken away and the light readmitted. A green or blue screen diminishes the force of the rotation. Yellow or red glass quickens it into a much more lively activity. If a cloud passes over the face of the sun while this little orrery is working at full speed, its movements are checked and somewhat slower; but the moment the sun is visible again the mechanism responds with alacrity, and its revolutions are as swift as ever.

Mr. Crookes is well known as the man to whom Science owes the discovery of the metal thallium, and the complete establishment of its atomic weight. He has also invented the radiometer. But the little orrery we have described above is a much more remarkable contrivance. It contains the promise of further discoveries. It will perhaps raise its inventor to the front rank among the explorers of physical science. In this simple little machine, one of the most occult forces of Nature is for the first time revealed to the eye of man. "In it," says the authority from which the foregoing facts are chiefly taken, "we see the subtlest of imponderables set like a willing slave to turn a wheel; while tiny as that wheel is in these experiments, we must remember that light pervades it, flashing perpetually from countless centers like our own sun, across the infinite ether; and it may be fairly imagined that the interplanetary ether resembles the vacuum in the bulb, so that the condition of these revolving disks is, perhaps, much the same as that of the planets in space. Strange, indeed, are the thoughts which must be started by this revelation that light, pouring upon bodies freed from atmospheric friction, is in itself an active and mighty force. That so remarkable a discovery solves at once the mystery of the comet's tail—which is always seen to be driven violently away from its natural line upon approaching the sun—is, we believe, affirmed by more than one high astronomical authority. But may it not also have something to do with the axial motion of the planets? May it not have something to do with the maintenance of centrifugal force, balancing, as it were, that of gravitation? Can it be for nothing in the celestial universe that this potency and stress of light sweeps from center to circumference of each system, exercising a power which, in its totality, must be something prodigious? It seems not impossible that our mathematicians, calculating from the small surface of these disks the motive force of sunlight, may soon tell us pretty accurately what is the aggregate power which the luminous rays of the sun command; and nothing of this, by the law of forces, can be really wasted. 'Let there be light, and there was light' seems to derive a new majesty of meaning from the discovery which shows us this subtle something, no mere undulation nor 'mode of motion,' but a living force as well as the illumination of all life. It does appear as if a marvelous expansion of knowledge is about to open in these delicate experiments."

But there are no limits to the ingenious conjectures which may be advanced. To pursue them would be unprofitable in the present state of our knowledge. What is certain is that a great cosmic force has been discovered and submitted to experiment and investigation. But how long this force will be before it finds its Kepler and its Newton, the future will show. "Why in the ranks of our American astronomers should we not look for the expected teacher to rise up?" Sir William Herschel, in his "Lectures on Astronomy," gives

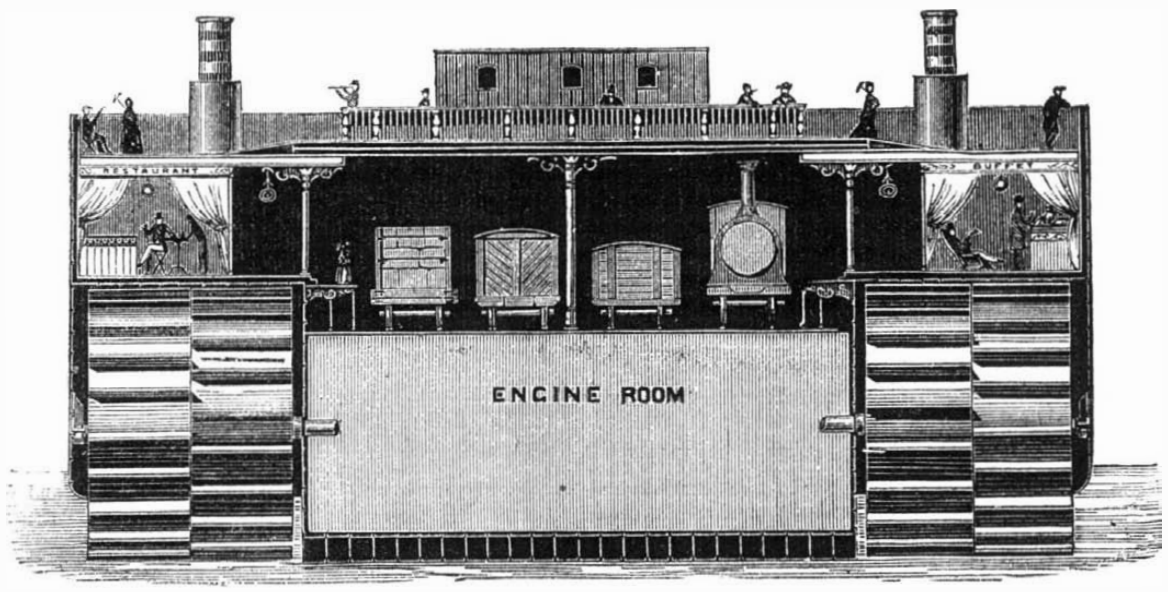

LEIGH'S CHANNEL FERRY. MIDSHIP SECTION.—Fig. 2.

© 1875 SCIENTIFIC AMERICAN, INC

some interesting calculations as to the enormous waste of the rays of light in the solar system. He concludes that "taking all the planets together, great and small, the light and heat they receive is only 1-227,000,000 part of the whole quantity thrown out by the sun. All the rest escapes into free space and is lost among the stars, or does there some other work that we know nothing about. Of the small fraction thus utilized in our system, the earth takes for its share only one tenth part, or less than 1-2,000,000,000 part of the whole." What is that "other work" to which Herschel refers? To this question the discovery of Mr. Crookes suggests an answer. For as Providence has created nothing in vain, so analogy would lead us to expect that the solar rays fulfil many useful purposes which, though long unknown to Science, will hereafter be discovered by the advancing knowledge of man. The present discovery, whatever else it may suggest, affords a new and beautiful illustration of the well known law of the conservation of forces, for it teaches us that the light which is incessantly pouring from the sun is perpetually converted into force, and that this force is utilized in the economy of the Universe, no part of it being wasted, or latent, or lost.

Correspondence.

The Sources of Electricity.

To the Editor of the Scientific American:

It is the general belief that the electricity of the atmosphere is generated by the friction of the air or action of the winds upon the earth's surface, also by the evaporation of moisture. Electricity is easily produced experimentally by either of these means. When we consider the immense surface of the earth and the enormous extent over which these effects are constantly being produced, we have an explanation of the immense reservoir of electricity that exists in the region of rarefied air that encircles the globe. This reservoir is continually being supplied and replenished, mainly by these two causes, evaporation of moisture and friction of the air upon the earth's surface. There is also a continuous outlet to this immense reservoir in the way of silent discharge to the earth, and by atmospheric discharge usually known as lightning. The above figure is given to represent the two great conductors, E being the earth and R A the region of rarefied air that encircles the globe.

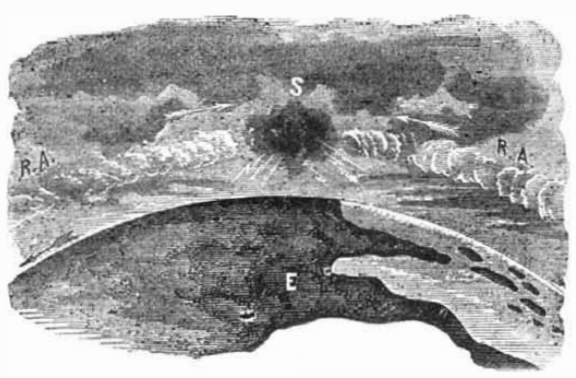

Whenever this outward conductor is brought sufficiently near the earth, direct discharges take place; or in other words, lightning occurs. Clouds are conductors, and the above engraving is designed to show how the conductor, which is composed of rarefied air and a cloud, is brought near to the earth. It is simply a conductor of two materials. Thunder clouds extend into the air higher than ordinary clouds. They extend into the region of highly rarefied air. When this occurs, accumulation of electricity into the cloud takes place. The electricity of this immense reservoir flows into the cloud because the cloud is that portion of the conductor which approaches nearest to the earth. S represents a thunder storm floating over the surface of the earth. While this cloud is in favorable condition of form and density, the electricity in this vast reservoir of rarefied air is flowing in the direction of the cloud. The cloud becomes charged, and lightning occurs. While positive electricity is flowing through rarefied air into the cloud, negative electricity is flowing in the surface of the earth in the same direction, and that portion of the earth directly beneath the cloud is charged with electricity of the negative or opposite degree.

It is the belief of the writer that earth currents, which so often show their annoying effects in telegraphy, are the mere counter currents of those that are continually flowing in the almost ethereal regions above, and these upper currents are in continual motion, seeking that portion of the conductor nearest the earth. The force and direction of these currents are as varying as those of the winds.

In the foregoing engraving, the form and relative position, as regards the earth, of this outside conductor is represented. Of course the only visible portion is the thunder cloud. Rarefied air is a conductor, but differing from other conductors, inasmuch as electricity flows through it slowly. In other conductors its speed is comparatively instantaneous. In a former article, this cloud has been compared to a porous standpipe which is filled with or containing water. Suppose we undertake to fill this standpipe. With a certain given supply or head, we can fill it to a certain hight. The hight of the pipe is indefinite, and it is desired to burst it. This can only be done by getting a sufficient hight of water in the pipe. The hight or head, we call accumulation. Now to get sufficient accumulation we must have a certain supply, called quantity. It must have a certain force, called tension, and it must not have too great a leakage. We can, under given conditions, fill this pipe only to a given hight; but to fill it higher, or to the point of bursting, we must increase the quantity—increase the head or decrease the leakage. If the supply is lessened, the quantity accumulated is diminished. If the supply is stopped, the pipe is discharged in time by leakage alone.

The conditions of the thunder cloud are somewhat analagous. It is always charged to some extent. It may not be sufficient to produce disruptive discharge or lightning. It may occur once, and it may occur over a thousand times. We have known such to happen as often as once per second for an hour or more. How very rapid, then, is this flow and accumulation, into the cloud, of electricity from the regions of rarefied air, which the cloud reaches on account of its great elevation!

The earth, with its outer conductor of rarefied air, resembles an immense Leyden jar of almost incomprehensible dimensions, the earth itself being the inner conductor and the heavier strata of air, directly in contact with the earth, serving as the dielectric. The outer conductor is continually being charged, and this source of electrical accumulation is due to the effects of the sun's rays upon the earth. Moisture is evaporated, every particle of which produces its quantity of electricity. When the winds are set in motion, the friction thereof produces its share. Wherever this dielectric is thinnest or interposes least resistance, there accumulation takes place in greater quantity. The dielectric is made thinner by the thunder cloud. Through the agency of the cloud, the two conductors are brought nearer together, and this accumulation finds vent or relief in disruptive charges called lightning. As soon as these thunder clouds assume favorable form or begin to develope themselves, their electricity gathers in greater quantity in this part of the outer conductor, also on the surface of the earth directly beneath.

The hight of thunder clouds is estimated as extending from seven to fifteen miles above the level of the sea.

The origin of thunderstorms is believed to be due to the expansion and rarefaction of the atmosphere. When heated by the sun's rays, it expands and forms a current upwards. The hot air coming in contact with the cooler air above, deposition takes place in form of fog or cloud, and, when sufficiently condensed, falling drops of rain are the consequence. The vapor or cloud of a thunderstorm, as viewed in the neighborhood of the mountains in Pennsylvania, appears to be far above the latter, that is, the lower portions of the cloud are far above the mountain tops. In Central Mexico, the lower portions of these clouds seem to rest or come in contact with the mountains. From observations, I am led to believe that the lower portions of a thunder cloud are from two to three miles above the level of the sea. The tops or higher portions, when observed from these mountains or from a hight of two and a half miles, appear as high as when seen from an ordinary or lower position. That the upper and lighter portions of thunder clouds extend very high is admitted by every intelligent observer. If it be true that the upper portions are about ten miles above the surface of the earth, they extend far into the regions of rarefied air, and thus afford means for the enormous accumulation of electricity with which they are charged.

We have every reason to believe that, in cases of frequent and heavy discharges, the cloud extends to a very great hight. One of the most violent storms ever witnessed by the writer passed over this city on the evening of July 4, 1872. It commenced about nine o'clock in the evening, the rain falling in torrents for about an hour, flooding streets and filling cellars with water. The electric discharges during the greater portion of this time occurred as often as once per second. It was reported that there were over a hundred buildings struck by lightning in this city, and it is more than probable there were as many more, not mentioned. No person was injured by lightning, so far as known, nor was there serious damage to property, except that resulting from the immense rainfall.

It is believed that this thunder cloud, in order that circumstances should favor so many and such violent electrical discharges, must have extended to a very great hight; and the large amount of moisture, in the shape of drops of rain between the cloud and the earth, assisted immensely by reducing the resistance.

DAVID BROOKS.

Philadelphia, Pa.

A Use for Bedbugs.

To the Editor of the Scientific American:

A correspondent in a recent number of your journal asks if there is any use for bedbugs. This reminds me of an accidental experiment I once made and had almost forgotten.

If nice fat bedbugs are placed in a saturated solution of nitrate of potash in water, and exposed to the air for several days in an open vessel, there will be no apparent change in the bugs; but there will be in the odor, for now it is as delicate and delicious as before it was rank and disgusting. No doubt the odorous principle could be easily separated, perhaps by digesting with alcohol or ether; and if neatly bottled and labeled, it would yield a large profit to practical perfumers.

The odor is unlike that of any other perfume I have ever smelt, and no one would suspect its low origin. This is one use for the *cimex;* there may be others.

C. K.

Cincinnati, Ohio.

VELOCIPEDE RACE.—The inter-university bicycle race, between Oxford and Cambridge, England, took place this year on the road from St. Albans to Oxford, a distance of fifty-two miles. It was won by Hon. Keith Falconer, of Cambridge, in four hours, nine minutes, and twenty-four seconds, with a fifty inch wheel machine. The average speed of the winner was 12½ miles per hour.

Action of Sunlight upon Precious Stones.

Dr. Schnauss has directed attention to the fact that certain minerals are quite sensitive to the action of light. To many of our readers this may seem quite surprising, although some cases of this kind have long been known to mineralogists. Strangely enough this property extends to the very hard minerals, and reaches its maximum in the very hardest of all minerals, the diamond. According to Dr. Fight, under certain circumstances the colored diamond is as sensitive to light as chloride of silver. The ancients knew that certain colored precious stones gradually grew paler in the sun light, and that this was very distinctly the case with the beautiful grass green chrysoprase. They said that, when worn for a long time set in a ring or pin, it finally lost a greater part of its beautiful color; and that this could be recovered by wrapping it up in a cloth soaked in wine and keeping it in a cellar. The latter is evidently one of the numerous phantasies of that age, but the former statement is a fact. Even the much harder, transparent, dark green emerald is also influenced by light in time, as the author found to his sorrow in the case of an emerald ring, which he had worn seven years.

The diamond, however, exhibits the most interesting phenomena under this influence. If colored diamonds are highly heated, the color disappears more or less completely, and in most cases permanently. Sometimes, the color is merely changed by ignition, and the original color may be restored by the influence of the sun's light. A diamond merchant named Martin exposed a diamond to a very high temperature, in order to destroy its brownish color, but the stone became of a permanent rose red. Coster treated another diamond in the same way, and that too turned rose red; but the most remarkable part was that this color was only permanent in the dark, and disappeared in 4 or 5 minutes if exposed to the sun's light, the stone acquiring a weak brown color. This change also took place in a room where the light was by no means bright. Another diamond, of a dirty yellow color, was ignited in a current of hydrogen in a porcelain tube and allowed to cool there. The color disappeared, but not the luster. If this specimen were exposed to diffused light for 6 or 7 minutes, its original yellow color returned. The experiment was repeated in this way, the stone being heated in chlorine gas at as strong a heat as could be obtained by saturating the gas used with benzol vapor; it was farther heated at a lower temperature in a mercury bath, the diamond being wrapped in platinum foil. Each time the color disappeared and remained absent in the dark; but as soon as the stone was exposed for a few minutes to diffused daylight, it regained its yellow color.

These phenomena are thought by Dr. Schnauss to be related to that of phosphorescence. In addition to the cases mentioned by him, we would recall the fact, usually stated in text books on mineralogy, that a variety of topaz from Brazil, when heated, assumes a pink or red hue resembling that of the Balas ruby.

S. H. Mead, Jr.

We regret exceedingly to note the death of Mr. Samuel H. Mead, Jr., of this city, a young inventor and scientist of much promise. After patenting a number of improvements in fire arms, Mr. Mead, some four years ago, devised a safety explosive bullet, which invention he subsequently combined with one of like character patented by General Meigs. The Mead-Meigs shell, as the combination is termed, is a breech-loading metallic cartridge with a hollow explosive bullet containing fine gunpowder. On penetrating flesh or on striking any hard substance, the bullet explodes, tearing the object to pieces. The missile has been used in hunting in the West, and it was Mr. Mead's design to use it in shooting sharks off Martha's Vineyard.

Mr. Mead was an excellent astronomer and optician, and was indirectly known to the readers of this journal through his articles on astronomical subjects, and through his replies to queries of that nature, which we frequently referred to him for opinion and answer. Just before his death, he was bringing to completion a novel device whereby the recoil of a Gatling gun could be utilized so that the reloading would be effected automatically after every discharge, so long as the cartridge receptacle was kept filled. The deceased was but twenty-seven years of age.

Completion of the New Atlantic Telegraph Cable.

After many delays and much expenditure of money, the cable of the United States Direct Submarine Telegraph Company was completed on June 9. It will be remembered that the splendid new ship Faraday, built expressly for the service, left the Thames more than 12 months ago to lay the section between Rye Beach, N. H., and Nova Scotia. The company have leased two wires, belonging to the Franklin Telegraph Company, from Rye Beach to New York, and have opened an office at 16 Broad street in this city, where business will shortly be commenced.

The cable from Ireland to Nova Scotia was laid to within 200 miles of the latter country; but owing to unfavorable weather and the Faraday leaking badly, it had to be cut and the end attached to a buoy. Its construction was fully described on page 40 of our current volume. It is the fifth cable now in use in the Atlantic service, and its contract price ($6,055,000) will enable the company, it is claimed, to make a moderate tariff of charges, and reduce the rates throughout the country. A speed of twenty words per minute is anticipated.

TO CUT glass to any shape without a diamond, hold it quite level under water, and, with a pair of strong scissors, clip it away by small bits from the edges.

© 1875 SCIENTIFIC AMERICAN, INC

ELECTRO-METALLURGY.

The deposition of metals in the process of electrometallurgy is of two kinds, electroplating and electrotyping. When our object is to coat a metal with a thin metallic film of some other metal, the object to be coated is immersed in a solution of some salt of the metal to be deposited. A current is passed from the bath to the object, so as to decompose the salt and deposit the metallic portion of it on the object, which is a negative electrode.

ELECTROTYPING.

The art of copying seals, types, medals, etc., by the galvanic current in metal, more especially copper, is called electrotyping. An impression is first taken in gutta percha, wax, fusible metal, or other substance which takes, when heated, a sharp impression. While the impression is still soft, a wire is inserted into the side of it. It is then covered with plumbago to give it conductivity, a camel hair brush being used for this purpose. The wire is then attached to the zinc pole of a weakly charged Daniell's cell, and the copper plate is attached by a wire to the copper pole of the cell. When the impression and the copper plate are dipped into a strong solution of the sulphate of copper, they act as the — and + electrodes. The copper of the solution begins to deposit itself on the impression, first at the black-leaded surface in the vicinity of the connecting wire; then it gradually creeps over the whole conducting surface. After a day or two, the impression is taken out; and the copper deposited on it, which has now formed a tolerably strong plate, can be easily removed by inserting the point of a knife between the impression and the edge of the plate. On the side of this plate, next the matrix, there is a perfect copy of the original seal.

ELECTROPLATING.

The very useful art of coating the baser metals with silver by the galvanic current is called electroplating. Theoretically it is very simple, but it requires very considerable experience and skill to make a successful application of it. Articles that are electroplated are generally made of brass, bronze, or copper. When tin, steel, iron, zinc, or lead is electroplated, it must be first electro-coppered, as silver does not adhere to the bare surfaces of these metals. Great care is taken in cleaning the articles previous to electroplating, for any surface impurity would spoil the success of the operation. They are first boiled in caustic potash, to remove dry adhering grease; they are then immersed in dilute nitric acid, to dissolve any rust or oxide that may be formed on the surface; and they are finally secured with fine sand. Before being put in the silvering bath, they are washed with nitrate of mercury, which leaves a thin film of mercury on them, and this acts as a cement between the article and the silver.

The bath wherein the electroplating takes place is a large trough of earthenware or other non-conducting substance. It contains a weak solution of cyanide of silver in cyanide of potassium (water 100 parts; cyanide of potassium, 10 parts; cyanide of silver, 1 part). A plate of silver forms the + electrode; and the articles to be plated, hung by pieces of wire to a metal rod lying across the trough, constitute the — electrode. When the plate is connected with the copper or + pole of a one or more celled galvanic battery, according to the strength required, and the rod is joined with the zinc or — pole, chemical decomposition immediately ensues in the bath, the silver of the cyanide begins to deposit itself on the suspended objects, and the cyanogen, liberated at the plate, dissolves it, reforming the cyanide of silver. According, then, as the solution is weakened by the loss of the metal going to form the electro coating, it is strengthened by the cyanide of silver formed at the plate. The thickness of the plating depends on the time of the immersion. The electric current thus acts as the carrier of the metal of the plate to the objects immersed. When the plated articles are taken from the bath, they appear dull and white; the dullness is first removed by a small circular brush of brass wire driven by a lathe, and the final polish is given by burnishing.

ELECTROGILDING.

The operation of electrogilding very closely resembles that of electroplating. The solutions are always alkaline, and usually consist of the cyanide or chloride of the metal, dissolved in an alkaline cyanide. To prepare the gold bath, two ounces of fine gold are dissolved in *aqua regia*; and the solution is evaporated till it has the consistence of syrup. Water is then added, together with two ounces of cyanide of potassium, and the mixture is boiled. The quantities named give about twelve gallons of solution.

The negative electrode consists of the article to be gilded. The positive electrode is a plate of fine gold, which constitutes a soluble electrode, and serves to keep the solution at a constant strength. In order that the gilding may be well done, the bath must be maintained, during the operation, at temperature of from 140° to 160° Fahrenheit.

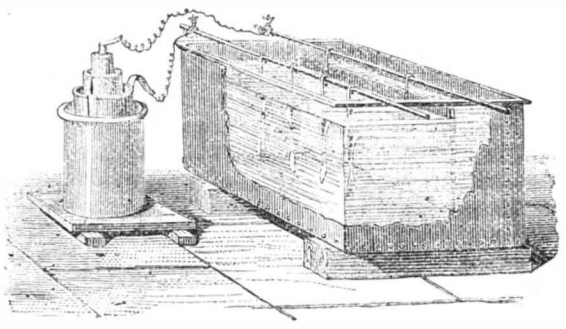

The accompanying engraving represents a form of apparatus which is very frequently employed. The poles of the battery are connected with two metallic rods resting on the top of the cistern which contains the bath The articles to be gilded are hung from the negative pole or rod. From the positive rod is hung a plate of gold, whose size should be proportional to the total surface of the articles which form the native electrode.

The same arrangement of the battery and the cistern for holding the bath is applicable for electrotyping and electroplating as well as electrogilding.

GENERAL DIRECTIONS.

The success or failure of the electrotype process depends very much on the preparation of the copper solution, and on the strength of the battery. A perfectly saturated solution is not so well adapted for the purpose as such a solution diluted with one fourth part of water. To prevent it from becoming too weak by the deposition of metallic copper, some crystals of the sulphate are added during the process. The strength of the battery, in relation to the strength of the solution, causes the metals to be deposited either as a black powder, in a crystalline form, or as a flexible plate. The metals are deposited as a black powder when the current of electricity is so strong that hydrogen is evolved from the negative plate in the decomposition cell. The crystalline state occurs when there is no evolution of gas, and no tendency thereto. The regular deposit takes place when the electric current is stronger in relation to the solution than in the last case, but is not sufficiently strong to cause the evolution of gas.

There are various methods of preparing the solution for electroplating and of dissolving the silver, but the cheapest and best is to dissolve the silver in a solution of cyanide of potassium, by the action of a voltaic battery. Dissolve 1½ ounces of cyanide of potassium in 1 gallon of water; place one of two flat porous vessels in this solution to within half an inch of the mouth, and fill them to the same hight with the solution; in these porous vessels, place small plates or sheets of copper, and connect them with a zinc terminal of a battery; in the large solution place a sheet or sheets of silver connected with the positive pole of the battery. This arrangement being made at night, and the power employed being five Daniell's cells, the zincs seven inches long by seven in circumference, it will be found in the morning that the solution is ready for use. The strength of the solution recommended is that of one ounce of silver to the gallon. An ounce and a half of silver to one square foot of surface gives an excellent plating. A few drops of bisulphate of carbon confer peculiar qualities upon the silver.

NICKEL-PLATING.

Nickel-plating is now very extensively carried on for the covering of articles hitherto plated with silver. Nickel is very easily deposited, and may be prepared for this purpose by dissolving it in nitric acid, then adding cyanide of potassium to precipitate the metal; after which the precipitate is washed and dissolved by the addition of more cyanide of potassium. Or the nitrate solution may be precipitated by carbonate of potash; this should be well washed, and then dissolved in cyanide of potassium; a proportion of carbonate of potash will be in the solution, which is not found to be detrimental. The sulphate of nickel is also a soluble salt, and the metal is reduced more readily from it than from the nitrate. It is preferable to use the solution as strong as possible. Nickel forms a compound with the cyanide of potassium on boiling the oxide in a solution of that salt, which takes up a considerable quantity. The acetate of nickel is easily formed, by adding pyroligneous acid to the oxide of nickel, but it is a bad solution for obtaining reguline or pure metal. The chloride of nickel is formed by dissolving the metal in muriatic acid. It forms a fine green colored salt, and a very excellent one for nickel plating. It may be used with a nickel positive pole, with one or two Daniell cells.

Absence of Mind.

We heartily concur with the Philadelphia *Ledger* in its assertion that among the bad habits, which are usually classed with the minor faults of mankind, is that of absence of mind. Says the writer: "We have all laughed at the awkward blunders of the absent-minded, their irrelevant remarks, their ludicrous mistakes, their forgetfulness of the ordinary proprieties of life. Often, however, serious results ensue through these seemingly trivial oversights; property is wasted, friends estranged, losses incurred, health and even life sacrificed. In times of strong excitement or peril of any kind, nothing is so valuable as presence of mind. It is not exactly courage, or fortitude, or sagacity, or judgment, but rather the calm and well poised ability to marshal all these forces into action just where and when they are most needed. How many lives have been saved and disasters averted by this simple endowment! How much of the heroism which we delight to honor may be traced to this potent source!

It is precisely this attribute of which the absent minded man is destitute. Whatever be his knowledge, or wisdom, or skill, however excellent his motives and intentions, however great his powers and capacities, he has not that control over them that ensures the rightful action of each in its own time and place. He is continually off guard, surprised, confused, unprepared. His mind may be of the finest order, but it is not at its post of command, and his powers are scattered and lost like soldiers without a leader.

It is not only in times of emergency that this presence of mind is essential. Every hour of our lives must depend upon it for value and efficiency. If a man would be a prosperous farmer, a skillful mechanic, or a successful merchant: if he would be a kind neighbor, a faithful friend or a loyal citizen: if he would be a good and true husband, or father, or brother: his mind must be present in each of these relations, not absent. It must assume its rightful dignity of command over each phase of his life in turn, and not become absorbed in one to the exclusion of the rest, nor flutter in every chance wind. This is the chief cause of absent-mindedness. The thoughts are suffered to linger about some favorite topic or to wander aimlessly, and of course the matter in hand cannot be thoroughly performed. If we cannot or do not direct our whole attention to the object on which we are engaged and banish all others, we cannot do justice to it or to our own powers. It is the mixing up of different things and the confusion of mind thus created that are largely responsible for much of the inferior work in the world, and many of its failures and disappointments.

Much of this absence of mind might be avoided if concentration of thought upon one subject at a time were made a prominent part of education. Children should be accustomed to think earnestly for short periods, and then to dismiss the subject wholly from their minds. Weariness, listlessness, and half-hearted attention should always be prevented. It is far better for a child to play with his whole soul than to study with but a fragment of it. If he be thus trained in his youth, if work and play and study, each in their turn, absorb him utterly for the time, there will be but little danger of his growing up to be an absent-minded man. Those in mature life who have unfortunately acquired this pernicious habit may, by a similar process of self-culture, gradually overcome it. No one who indulges in it can make the most of his powers in any direction or give out to the world his full value; and certainly no one in our present varied and complex civilization can fulfil his manifold relations in life unless he resolutely bring all the powers of his mind to bear upon each one of them in its own appointed season."

Discoveries.

Discoveries in Science are the result either of experiment, of thought, or of chance. An experimental discovery is usually the result of a well planned attack upon some fortress of Dame Nature—every step, every sap, and every battery being well considered and faithfully followed; or it results from the attacking force perceiving indications of some sunken mine, or unknown treasure, and following it up with care and determination. Davy's discovery of the safety lamp is an example of the first kind. Something was wanted—its requirements were well defined; Nature was asked to supply those wants and requirements, and she was forced, by experiment and enquiry, to reply. Faraday's discovery of magneto electricity was of the second kind. He was engaged in solving a difficult and intricate problem; something attracted his attention, he followed it up, traced it out, and was rewarded with the discovery of what ought to be universally called *Faradaism*.

A discovery the result of pure thought must be bared on experience. An experiment sets

> —"that inward eye
> That is the bliss of solitude"

a-working. The imagination is brought into play. Thought pictures something that should be, and observation finds out that it is. Graham's discovery of dialysis, and of the occulsion of hydrogen by iron, was of this character. So have been the innumerable additions made to organic chemistry by Liebig and his followers. So have been the strides made in the theory of energy by Mayer, Joule, Thomson, Clausius, and others. Experiment has set the ball rolling, thought has kept it going, and imagination has said: "If I only direct it in such a path I am sure to alight on some treasure, or it is sure to bring me to the goal I seek."

Discoveries cannot be said to be the simple result of pure chance. Newton and the apple are said to have led to the discovery of gravitation; but the apple was only the means to direct the thoughts of the philosopher in a certain channel, which certainly led to success; but he had been previously pondering and weighing innumerable other channels and courses. Galvani and the frog are said to have led to the chance discovery of voltaic electricity; but the frog may have jerked its legs on the professor's balcony, or skipped into the physicist's laboratory with the energy of a ballet dancer, before it would have led to the discovery of current electricity unless there had been a trained mind to watch its antics, to follow up its peculiarities, and to ferret out its indications.

Daguerre's discovery of the influence of the vapor of mercury upon sensitive plates of silver is another which is included among chance discoveries. He had been experimenting on silver plates rendered sensitive by iodine, and had, after exposure, put them in a cupboard full of chemicals. To his surprise he found, after a time, pictures develope themselves on the plates, attributing the effect to some chemical. He removed the chemicals one by one, until all had been removed. The effect, however, continued. He then found an unknown and forgotten flask of mercury, which gave out its vapor, and thus produced the effect observed—and this was the origin of the daguerreotype process. But this was not purely the result of chance. It was the previous training and previous experience which arranged the conditions that led to the discovery, and which enabled the mind to seize upon those very facts which resulted in success. Training and experience are therefore essential in seizing upon abnormal indications of Nature, as they are in comprehending and appreciating her laws and applying them effectively to practice. —*Telegraphic Journal.*

THE STEAM MAGNET.—M. Donato Tommasi states that, if a current of steam at a pressure of 5 to 6 atmospheres is passed through a copper tube of 0·08 to 0·12 inch diameter, and coiled spirally around an iron cylinder, the latter is magnetized so effectually that an iron needle, placed at the distance of some inch or two from the steam magnet, is strongly attracted, and remains magnetic as long as the steam is allowed to pass through the copper tube.

© 1875 SCIENTIFIC AMERICAN, INC

IMPROVED HAND CART.

The ordinary hand cart is open to two objections: first, the impossibility of loading from the rear on account of the disposition of the vehicle to tilt; and second, the inconvenience of loading at the side, owing to the wheel being in the way. Both of these difficulties, it is claimed, are overcome in the invention illustrated in the annexed engravings, which consists in an arrangement of the bed so that it slides back and forth at the will of the operator.

A is a frame attached to the axle of the cart and further supported by the braced standards shown, which rest on the ground when the cart is stationary. On the top side of the frame are secured the metal runners, B, upon which clips, C, having eyes, and attached to the bottom of the vehicle body, fit. These clip eyes are loose upon the runners, so that the body can be moved forward from the axle, as shown in Fig. 1, to allow of loading without the interference of the wheel. When the loading is finished. the body is pushed back and balanced over the axle, as shown in Fig. 2.

It will be seen that the standards give the body a firm support when the same is pulled forward. The inventor suggests that, as there is no establishment in this country which makes a specialty of hand cart making, a profitable trade might be monopolized under his patent.

The inventor, Mr. Joseph M. Jones, desires to dispose of his right for two thirds of the United States; for further particulars regarding which offer, etc., he may be addressed at Paris, Bourbon county, Ky.

Patented through the Scientific American Patent Agency, May 11, 1875.

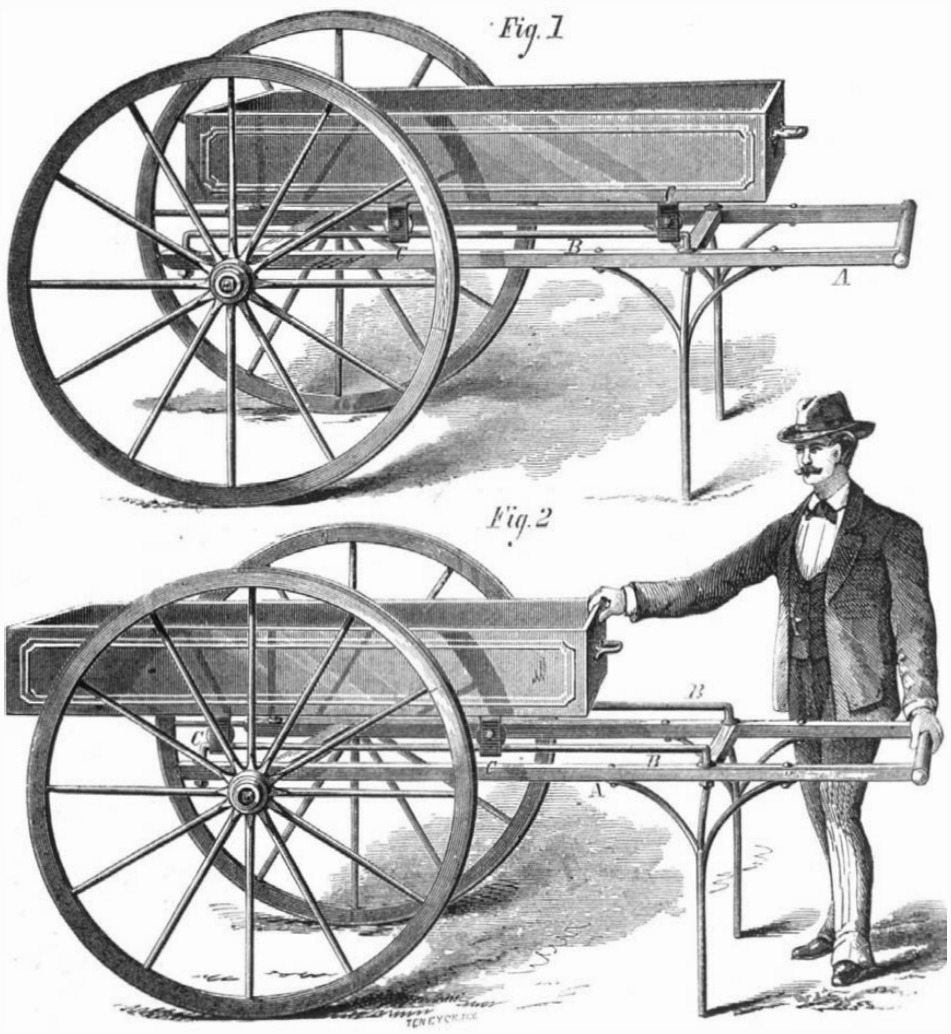

JONES' HAND CART

Feeding Marine Boilers.

The use of a second boiler for 'the purpose of providing a supply of fresh water to keep up the feed to the main boilers of ships fitted with compounded engines, is becoming very general. Various contrivances have been adopted also with the view to utilize the working power of the steam of this second boiler by passing it through the engines before allowing it to go to the condensers. The *Societa Nazionale* of Naples have adopted the following plan in the engines fitted by them to the ships of the Italian navy: The small boiler is vertical, with a number of transverse tubes of very simple arrangement. These boilers are easily cleaned by loosing a joint and removing the outer shell, which leaves all the parts in contact with water and steam exposed. These boilers are also used for other purposes, such as working pumps and winches, and are not always in use for their primary purpose.

DUNN'S IMPROVED VINE RAKE.

The invention illustrated herewith is an implement for pulling sweet potato or other vines off from the ridges preparatory to the digging and plowing of the ground. It consists of a supporting plow beam provided with lever handles of the usual construction, and having, in place of the plow stock and share, a fork or rake made with two forward curved teeth. This is rigidly secured to the beam by a central eye bolt and rear braces.

The rake is drawn by a pair of animals, one walking on each side of the ridge to be cleared. The beam is placed directly over the top of said ridge, with the teeth on the sides of the drill, at base of the vines. As the team advances, the teeth pass under the vines and tear them loose from the ground, carrying them along until the rake becomes full. The implement is then pulled back and raised clear of the gathered vines, and again started to clear another section of the field.

Patented through the Scientific American Patent Agency, April 20, 1875. For further particulars address the inventor, Mr. Joseph W. Dunn, P. O. Box 8, Corpus Christi, Texas.

The Odorless Broiler.

This consists of a gridiron of the usual kind, fitted within a case of tin, so arranged that, when placed over the fire of an ordinary stove or range, the smoke and odors of the cooking operation, instead of escaping into the kitchen apartment, are drawn into the fire and go up chimney. We are using this improvement in our household, and therefore speak from experience when we say that it operates with success, prevents all escape of smoke and odors, and, by concentrating the heat upon and around the meat, insures, we think, better cooking. Housekeepers will highly appreciate this invention. Maker and patentee, Joseph Mansfield, Jefferson, Wis.

SMITH'S STEAM SENTINEL.

An English inventor has recently produced a combined safety valve and whistle, which cannot be tampered with, and is, as will be seen from our engraving, an efficient and simple device. The safety valve is conical, and is kept in

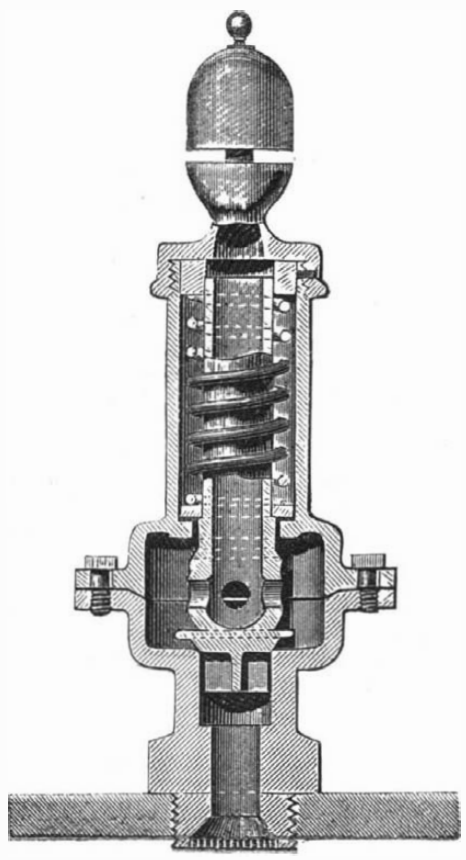

place by a spiral spring, which is carefully adjusted to the required pressure. The lifting of the valve is at once made known by the sounding of the whistle.

Consumption.

At a recent meeting of the New York Academy of Medicine, the pathology and etiology of pulmonary phthisis, in relation to its prevention and early treatment, was described. The discussion was opened by Dr. Leaming, who gave an abstract of Dr. Hudson's paper

Dr. W. H. Draper said that phthisis in its early stage was one of the most unsatisfactory diseases that we had to deal with. The recent pathological views were only of indirect benefit in guiding us. Laennec held that phthisis was always tuberculosis; but Dr. Addison, in 1846, declared that inflammation was the object of destruction in every form of phthisis, and at that time his views were coincided with by some of the French pathologists. If phthisis, said Dr. Draper, is inflammatory in its nature, rest is and must be one of the most important ends to attain in its treatment, and any action, exercise, or anything which tends to increase the pulmonary circulation, of necessity is contraindicated. Dr. Roberts, of London, and Dr. McCree, of Belfast, have followed this out with good results in strapping the chest, and thus keeping it to a great extent in a quiescent state.

Those who ignore the element of inflammation in the disease consider rest prejudicial. In respect to climatic influence, there can be but little advantage gained beyond allowing the patient to live out of doors a great part of the time. Patients, however, frequently derive more benefit from a residence in the Northwest than they do from more southerly latitudes. Phthisis as a disease is most common in the tropics, and decreases in frequency toward the extreme north or the extreme south. Elevated regions have also a beneficial effect, and in mountainous sections phthisis is relatively unknown.

Dr. John C. Peters did not think that phthisis should be considered as an inflammation, though it might provoke it He was strongly convinced of its dyscratic nature.

Dr. Sullivan was of the opinion that the subject of defective ventilation had a most important bearing on the production of phthisis, and brought forward different facts to substantiate his views.

Dr. Willard Parker coincided in the views of Dr. Sullivan in respect to ventilation, and thought deficient sunlight also a most important factor to consider in reference to the etiology of the disease. He was strongly opposed to the plan of rest for consumptives in the beginning of the disease. The cases that do best are those that spend most of their time in outdoor exercise. He cited different cases in which the disease had made decided progress, and which were thoroughly cured by a life of activity outdoors.

Dr. Hubbard said that the same climate did not suit all patients; some patients do exceedingly well in Santa Barbara, where the thermometer does not vary more than ten degrees the year round; while others, who are not benefited there, improve by moving sixty or seventy miles inland.

HARRINGTON'S IMPROVED GUN SIGHT.

The invention herewith illustrated is a globe or peep sight which may be adjusted so as to present either a coarse or fine sight as desired. It can be attached to any gun, and is claimed to insure accuracy in shooting.

A is a slotted standard suitably hinged to the barrel and held upright by the spring, B. C is an adjustable slide held in any desired position by the spring, D, engaging in notches on the standard. This slide is provided with a sight hole. E is another slide adapted to move in guides on the slide, C, and pierced with a number of holes of different sizes, as

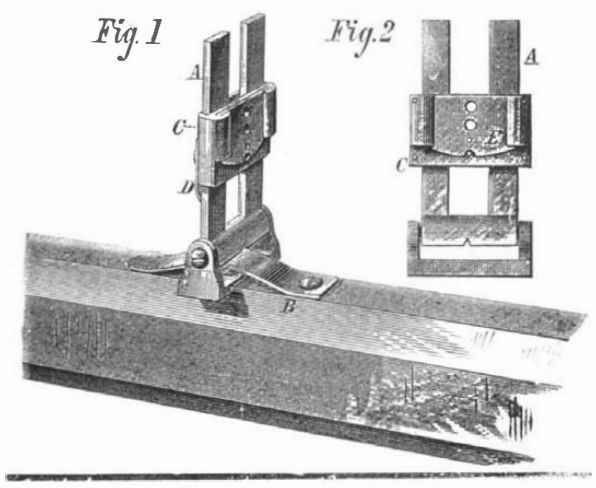

shown. By raising the slide, E, the slide, C, can be used as a coarse sight, and by lowering the former a finer sight is obtained. The finest sight hole that can be seen through may be used, and generally the size of the orifice may be easily changed to suit differing conditions of weather, whether bright, overcast, or dark.

Patented February 25, 1873. For further particulars address the inventor, Mr. Munson W. Harrington, York Center, Iowa county, Iowa.

GLYCERIN paste for office use may be prepared by dissolving 1 oz. gum arabic and 2 drachms glycerin, in 3 ozs. boiling water

© 1875 SCIENTIFIC AMERICAN, INC

SWIMMING.

Mr. Paul Boyton's feat of crossing the English Channel by the aid of a life-preserving dress tends to prove the value of a knowledge of how to swim almost as much as it does the efficacy of the invention tested. While the dress afforded buoyancy to his person, the wearer, through his expertness as a swimmer, knew just how to use his members so as to aid in his propulsion, with the least expenditure of power. The season is now at hand when the water becomes sufficiently warm to allow of bathing at almost any hour of the day, and hence the present is an excellent time, for those who contemplate acquiring this very necessary part of the knowledge of self-protection, to begin.

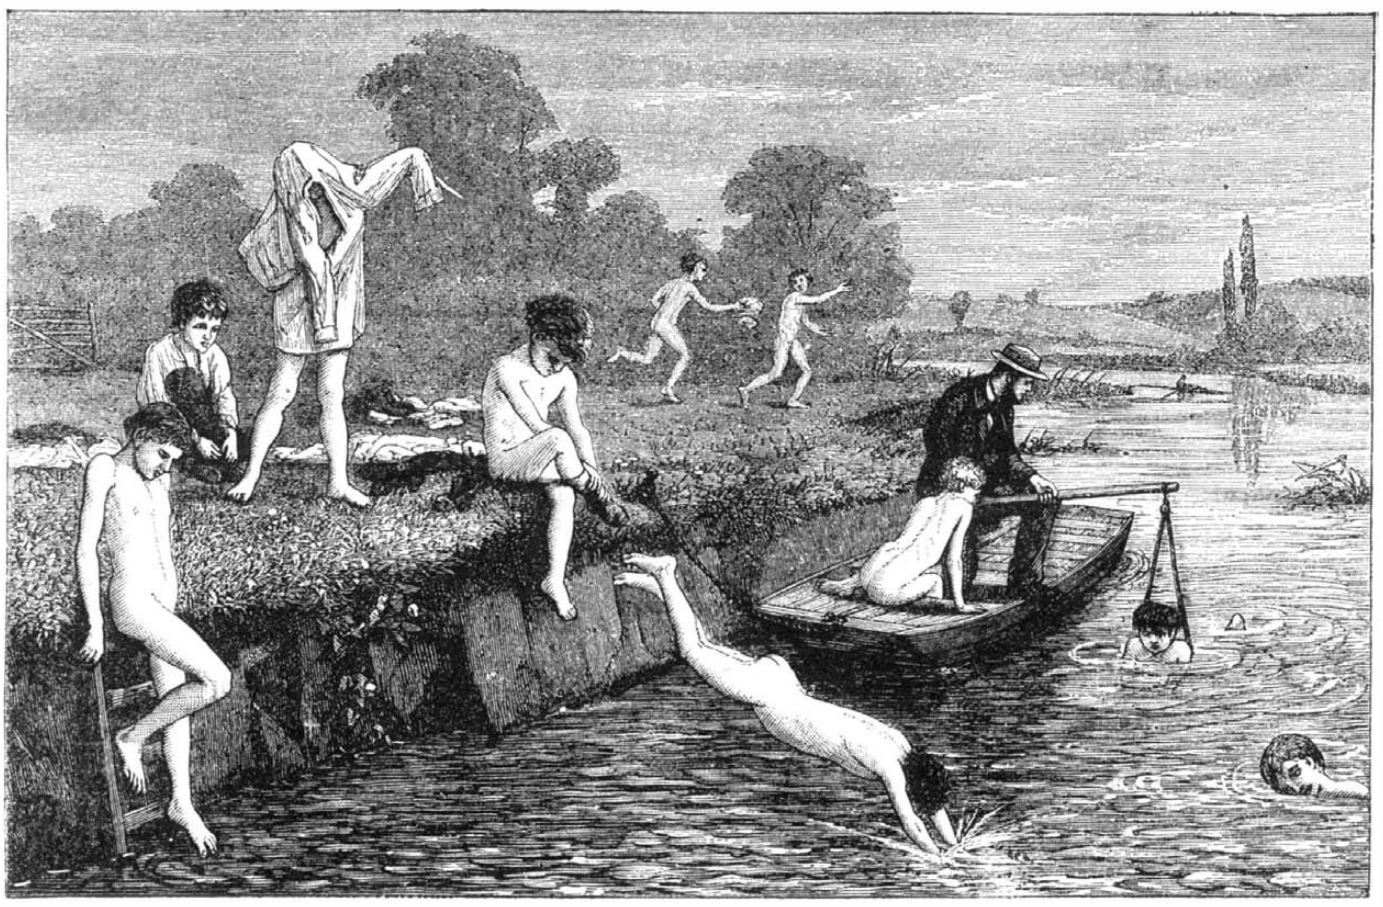

BOYS LEARNING TO SWIM.

The manner of swimming properly is as follows: Supposing the bather to be in the water, he throws himself forward on his stomach, his whole body being only just covered by the water and no more; his hands are brought up under the chin, knuckles upward and with the first fingers touching each other: the whole palm is slightly contracted so as to form a concave surface, and the fingers are pressed closely together. The legs are drawn up as short and as near the body as possible; the breath is fully inhaled; then the stroke is made; the hands and feet are both darted forth to their fullest stretch at the same moment; the former are still kept close to each other, and the balls of the toes are made to touch, in which position they remain unmoved till the whole stroke is finished. The hands, fully extended, are then separated and moved round, each describing part of a circle till they are opposite the shoulders, and then the stroke is finished. But observe that which is of most consequence; the exhalation of the breath begins with the stroke, and is slowly continued as long as the striking lasts; indeed, the quantity of breath determines how long the stroke will be, for it is taken only once at every stroke. It is very measuredly given out by a good swimmer, and all the time he is breathing forth he brings his hands round, making the lungs and the hands work and cease working together. The legs all the while, after the first rapid kick, remain stretched out rigidly, with the heels quite close to the water surface; thus a flat position is secured, which greatly conduces to speed.

The hands are only slightly propulsive; their chief use is to act as a cutwater, cleaving the way for the body, but, much more, to prolong the impetus given by the legs, and to eke it out to the utmost. The breath acts as a float to the whole, and cannot be too carefully husbanded and proportioned to the long sweep of the arms. A swimming stroke resembles that of an oar in its perfection; for it is quick forward, evenly pulled out, and the recovery for a new stroke is rapid; and on these two things, namely, lying truly horizontal just under the surface of the water, and proper treatment of the breath, the art of swimming depends.

In entering the water head foremost, or "taking a header," as it is called, the water should be struck by the forehead bone, just below the hair—the hands having first cloven the water, as shown in the illustration. The angle which the body should form with the water should be less than half a right angle, or from thirty-five to forty degrees, as shown in the diving figure in the annexed engraving, selected from the *Art Journal*. Then recovery upwards is rapid, and the appearance of the whole graceful. Adepts have brought this branch of the art to such perfection that they can jump into less than two feet of water without touching the bottom.

In fresh water a strong swimmer will move fully five feet and a half at every stroke without great exertion. How many strokes he will make in a minute must depend on his breathing capacity; twenty-five to twenty-six would probably be the average. This will give fifty-eight yards per minute, or just two miles an hour; and we should think, to accomplish that pace without distress would be a fair criterion of a good swimmer. At racing pace the strokes are much more rapid, exceeding fifty per minute; and the highest speed that seems attainable is thus eighty-eight yards, or exactly three miles an hour.

Mastodon for Yale College.

Professor Marsh has secured, for the Peabody Museum of Yale College, the skeleton of a large mastodon, exhumed by Mr. A. Mitchell on his grounds at Otisville, seventy-five miles from New York and within a mile and a half of the Erie railroad. The bones were found on and in clay, beneath a deep bed of muck, and are in an excellent state of preservation. This Otisville mastodon is the sixth that has been found in the swamps of Orange county, N. Y.

THE GROUSE FAMILY.

Of the many feathered races that afford beauty to our moors and woodlands, sport to our gunners, and food to our tables, the grouse is one of the most distinguished. There is a great variety of birds known under this generic name, including species widely different, as for instance the ptarmigan and the black cock, or the capercailzie and the cock of the plains. The sand grouse (*pterocles*) is found in the arid deserts of Asia and Africa, also in Southern Russia. The wings are long and pointed, and the powers of flight are exceptionally great; and the toes are connected by a membrane, enabling the birds to run rapidly on loose sand. Their plumage is variegated, brown, gray, and ocherous yellow being predominant. Though the birds associate in pairs, they are often met with in flocks, and they are striking objects on the wing, being beautifully marked. Their flesh is, strange to say, coarse and flavorless.

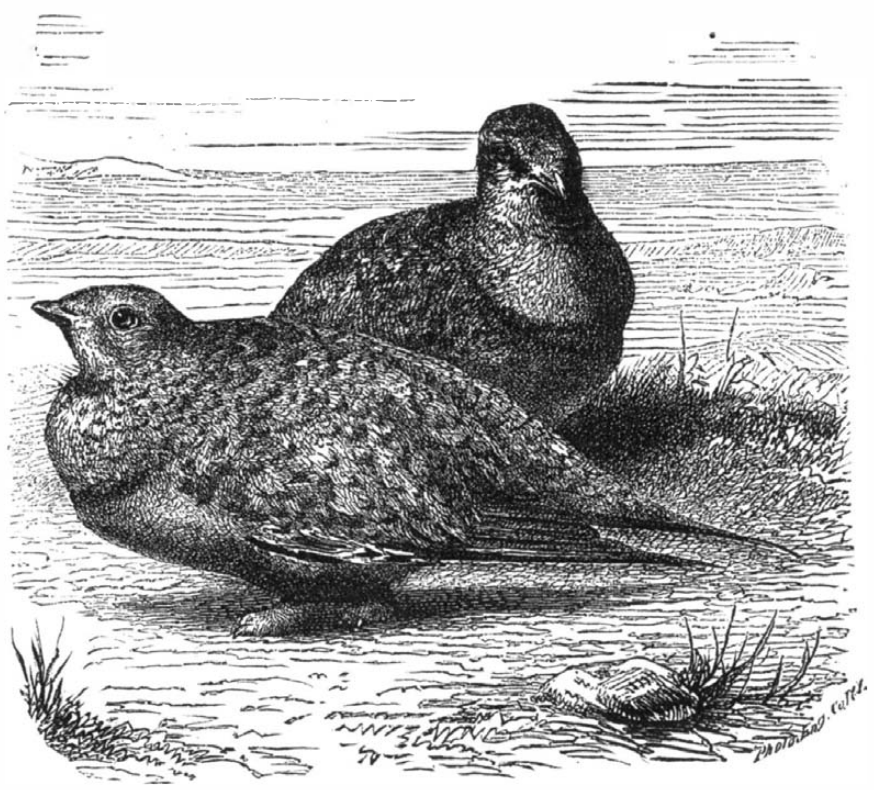

THE SAND GROUSE.

The hen lays her eggs in a hole in the sand, and hatches out her young, which are soon able to obtain their own living, being strong and hardy.

The British Telegraphs.

From the annual report of the Post Office Department of Great Britain, just rendered to Parliament, we gather that the total receipts for telegraph service for the year ending March 31, 1875, was $5,600,000, and the expenditures for the same, $5,965,300, showing a net loss of $365,300. The Chancellor of the Exchequer, referring to the telegraphs, in his speech on the budget, took a rather gloomy view of what he termed a remarkable experiment, and held the results up before the House as a warning not to enter into any other kind of business which could better be carried on by private enterprise. He said: "Undoubtedly the telegraph service has not yet been brought into a remunerative condition. We are not as yet paying our way, and are contributing very litt'e toward the interest on the debt incurred for the purchase."

The telegraphs of Great Britain have already cost that government about $60,000,000, and there are claims still pending which will amount to several millions more. Every year the deficiency has been enormous, to say nothing of the loss of interest upon so vast a sum. This latter item alone, at the low rate of 3½ per cent, amounts to $2,100,000 yearly. At the prevailing rate of interest in this country, 7 per cent, this loss would, of course, be twice as great. All of this has to be met, and there is but one way to meet it—by increased taxation. In this manner the burden of affording telegraphic facilities at less than cost, to the one per cent of the population whose business necessitates their use, falls upon the ninety-nine per cent who do not use the telegraph at all.—*Journal of the Telegraph.*

How Inventions are Made.

The life of George Stephenson proves that, notwithstanding the novelty and great importance of his improvements in steam transit, he did not discover these improvements. He did not discover that a floating embankment would carry a railway across Chat Moss, neither did he discover that the friction between the wheels of a locomotive and the rails would enable a train to be drawn by tractive power alone. Everything connected with his history shows that all his improvements were founded on a method of reasoning from principles, and generally inductively; to say that he "discovered" our railway system, according to the ordinary construction of the term, would be to detract from his hard and well earned reputation, and place him among a class of fortunate schemers who can claim no place in the history of legitimate engineering.

Count Rumford did not by chance develope the philosophy of forces upon which we may say the whole science of dynamics now rests; he set out, upon a methodical plan, to demonstrate conceptions that were already matured in his mind, and to verify principles which he had assumed by inductive reasoning.

The greater part of really great and substantial improvements which have performed any considerable part in developing modern mechanical engineering have come through this course of first dealing with primary principles, instead of groping about blindly after mechanical expedients; and present circumstances point to a time not far distant when chance discovery will quite disappear. —*Engineering.*

Mastic for Iron and other Materials.

The following is the composition invented by M. I. Machabee, which is said to preserve iron from rust, and also to be applicable to other materials, such as stone or wood, used in conjunction with iron or other metal, in the formation of reservoirs or other works: Virgin wax, 100 parts; Gallipoli, 125; Norwegian pitch, 200; grease, 100; bitumen of Judea, 100; gutta percha, 235; red lead, 120; and white lead, 20, all

© 1875 SCIENTIFIC AMERICAN, INC

of which, says the inventor, have their special value. The materials are mixed in a boiler in the order in which they are given, the gutta percha being cut up in small pieces, or rasped. The mixture must be well stirred at each addition, and, when homogeneous, is poured into molds, and looks like chocolate. When used for preserving iron from rust, it is melted and laid on with a brush; but for stopping holes, etc., it must be in a pasty state. It may also be used as a glue to fix a piece of metal over a hole. For certain purposes, such as stopping holes in large vertical metal surfaces, the composition is slightly varied, the Gallipoli being reduced to 115, the bitumen to 90, and the red lead to 100, while 40 parts of gum copal are added next to the gutta percha.

Tasmanian Devils.

The United States steamer Swatara lately arrived at this port from Australia, with the instruments and apparatus used by the American astronomers during the late transit of Venus observations.

Among the curious animals brought home by the officers are a *sarcophilus ursinus*, or Tasmanian devil. This hideous creature is said to be the only living specimen in this country, and it will probably be sent to Central Park for exhibition. In appearance it has some resemblance to the American raccoon. It is carnivorous, and in its wild state principally lives upon birds, rats, and other smaller animals. Although partially tamed, it is deemed necessary to keep the creature confined on deck.

There is also on board a wombat or Tasmanian hog, which lives upon vegetable matter. Several kangaroos, with a walloly and two beautiful Gordon setters, were also noticed playing upon the deck of the Swatara; while a number of love birds and parrots, and a Sultana bird, were caged in different portions of the vessel. A fine collection of Australian ferns has been made by several officers connected with the expedition.

DECISIONS OF THE COURTS.

United States Circuit Court---Southern District of Ohio.

PATENT FEED WATER FILTER.—THE STILWELL AND BIERCE MANUFACTURING COMPANY *vs.* THE CINCINNATI GAS LIGHT AND COKE COMPANY, THE ARMSTRONG HEATER AND MANUFACTURING COMPANY, JAMES A. ARMSTRONG, AND STEPHEN H. STARR.

[In equity.—Before SWING, J.—Decided January, 1875.]

The first claim in reissued patent for feed water heater and filter, granted to E. R. Stilwell, August 24, 1869, which is for "filtering material F, between a series of shelves and outlet, substantially as described," held valid notwithstanding the fact that filters had been used for freeing the feed water for boilers from the matter held in mechanical suspension therein, and the further fact that heaters composed of a series of shelves had been used for a similar purpose to remove from the water the matter held in solution and a portion of that held in suspension.

Although the operation of neither the shelves nor the filter is affected by the union of the two in the same machine, a new result is produced, inasmuch as the water is passed into the boiler in a condition different from that which would have been produced by either of the devices separately.

The Stilwell patent is not invalidated by the earlier English patent of Wagner, since it is doubtful whether the Wagner device could be practically used with success.

There is no force in the objection that the Stilwell patent does not specify what filtering material is to be used. The patent permits the use of any suitable filtering material, and persons skilled in the art could at once use the invention without experiment or additional invention.

The mere making of a model of an invention held not to constitute invention, as against a patent subsequently granted to another for the same thing.

The alleged anticipation of the Stilwell invention by James A. Armstrong discussed.

It was decided by the court that the respondents infringe the first and second claims of the second patent, namely, the filtering material between the shelves and the outlet, and the arrangement of steam inlet and shelves; and that they do not infringe the first and third patents, as alleged in complainants' bill.

[*Wood & Boyd*, for complainant.
Fisher & Duncan and *John E. Hatch*, for defendants.]

Supreme Court of the United States.

PATENT LOOM.—WILLIAM MASON, APPELLANT, *vs.* E. H. GRAHAM AND W. ROUSE.

[In equity.—Appeal from the Circuit Court of the United States for the District of Massachusetts.—October term, 1874.]

[This was a suit in equity under letters patent relating to an improved picker staff motion in looms, granted to E. H. Graham, October 16, 1860, and reissued May 28, 1867, to the inventor and Wanton Rouse, a half owner in the patent.

The case as decided in the circuit court will be found fully reported in 5 Fisher, 1.

It was appealed by the defendant.]

STRONG, J.

The patent of E. H. Graham, of October 15, 1860, reissued May 28, 1867, for "picker staff motion in looms," has no relation to the mere form of a journal-bearing arm, nor does it consist in arranging a journal-bearing arm in a slot in the rocker. It embraces every combination of a rocker with a bed and loose journal-bearing arms, arranged so as to produce the result described in the specification as effected by the combination.

Inasmuch as defendant employs a combination of a rocker with a bed by loose journals projecting on each side the picker staff, and the combination is effected by means of a journal-bearing arm, it is immaterial that the form of his journal-bearing arm is unlike that of complainant's, or that its mode of attachment is different, so long as it performs the same function in substantially the same way.

Where defendant had been in the habit of selling the infringing picker staff motion both separately and attached to looms, in ascertaining his profits upon those sold with the looms, regard should be had to his profits upon those sold separately, rather than to the aggregate profits made by him upon the loom and attachment combined.

If defendant has cheapened the cost of producing the infringing device by an improvement of his own, he is entitled to a corresponding credit in the ascertainment of the profits which complainants are entitled to recover.

[*Benjamin Dean*, for appellant.
J. E. Maynadier, for appellees.]

NEW BOOKS AND PUBLICATIONS.

THE MOSAIC ACCOUNT OF CREATION, THE MIRACLE OF TO-DAY: or New Witnesses to the Oneness of Genesis and Science. By Charles B. Warring. New York city: J. B. Schermerhorn & Co., 14 Broad street.

Scientific students who attempt the task which Mr. Warring has imposed upon himself must be careful not to underrate its magnitude, and must prepare for vigorous attacks from both classes of polemics. The author, in the work now before us, has assembled a large number of coincidental similarities between the Genesitical account and the revelations of research; and although his zeal has induced him to claim as proofs some points which are rather fanciful and far-fetched, the book will repay any one who will read it attentively; for it contains much laborious thought and many evidences of careful study, and shows that the author has not too hastily thrown himself into the arena of combat. But the battle is not likely to be ended for some time; and we are not yet able to pronounce whether either side, the theologians or the sceptics, or the "harmonists" (to coin a word to describe the most recent writers), are likely to secure even a temporary victory.

HISTORY OF THE UNITED STATES OF AMERICA. Illustrated. Supplied to subscribers only, in parts at 25 cents each. New York city: Cassell, Petter, and Galpin, 596 Broadway.

This is another of the many series of finely illustrated standard works which have gained for the above named publishers an enviable reputation, both in this country and in England. The history begins with Sir Walter Raleigh's attempted colonization of North Carolina in 1584-5; and it will embrace all subsequent events up to the present time. The illustrations are excellent specimens of the wood engraver's art, and are lavishly interspersed throughout the text. Many of them are of especial interest as *facsimiles* of old pictures, documents, etc. The work is written in a clear and graphic style, and seems to fulfil all the requisites of a popular descriptive history.

THE ARTIZAN'S GUIDE AND EVERYBODY'S ASSISTANT, embracing nearly Four Thousand New and Valuable Receipts, Tables, etc. By R. Moore. Price, in cloth binding, $2.00; morocco, $3.00. Rouse's Point, N. Y.: John Lovell & Sons. Montreal, P. Q.: The Lovell Printing and Publishing Company. New York city: John Wiley & Son, 15 Astor Place.

A copious selection of instructions for using various industrial and domestic processes, well arranged and edited. The articles are classified by the trades for use in which they are designed, and so form, in many cases, complete treatises on the subjects.

DIGEST OF THE UNITED STATES PATENTS FOR PAVING AND ROOFING Compositions to January 1, 1875, and English Paving Compositions to January 1, 1874. By L. W. Sinsabaugh, United States Patent Office, Washington, D. C. Price $10.

Mr. Sinsabaugh adds another to a very valuable series, which we hope will be continued till every class of patents has been summarized. To any one engaged in operations involving the use of patented articles, whether as inventors, manufacturers, or merchants, such books are indispensable; and the high price necessitated by the labor of compiling them and their limited circulation is more than repaid by the handiness and facility of reference which they afford.

THE JOURNAL OF EDUCATION, devoted to Educational Interests, Science, Literature, and Art. Yearly Subscription, $2.50: single copies, 25 cents each. Brooklyn, N. Y.: 185 Montague street.

There has been a great opportunity for establishing a high class periodical devoted to educational subjects. The lavishness with which provision for education has been made by all our States has long been matter for congratulation and pride; while the illiterateness of many of the senior pupils causes us to wonder how so much money can be spent to produce so poor a result. The failure is undoubtedly due to imperfect and unmethodical teaching; and the science of imparting instruction needs to be carefully and studiously learnt. To this end, a literature of the whole subject is needed; and the magazine now before us is a long step towards supplying it. It is well written and edited, and is altogether a creditable publication.

NEW YORK CITY DIRECTORY. Volume LXXXIX, for the Year ending May 1, 1876. Price $6. New York city: The Trow City Directory Company, 11 University place.

The organization for compiling this indispensable book should, after 89 years' labor, be tolerably complete; and we are already (June 11) in receipt of a handsomely printed volume, containing a correct list of all persons doing business or occupying houses in New York city, including the many changes which took place as usual early in the month of May. The names in the Directory are 4,468 more in number than those of last year, and the increase of the population within the 12 months may be estimated at 22,000. The whole value of such a work consists in its accuracy; and we feel bound to testify to the care bestowed on its compilation and its consequent value as a thoroughly trustworthy book of reference.

WILSON'S BUSINESS DIRECTORY OF NEW YORK CITY. Volume XXVIII. Price $2.50. New York city: The Trow City Directory Company, 11 University place.

We have here a very compendious classification of the firms and business men of our city, arranged under the heads of their respective professions and trades. Commercial travelers, advertisers, and others wishing to obtain complete lists of persons occupied in any particular calling, will find this directory complete.

A NEW TABLE OF EXTENDED MULTIPLICATION. Devised by George A. McLane, of Chicago, Ill.

This is something of a mathematical curiosity. It is intended to take the place of Crelle's "Tables of Calculation," now generally used in life insurance offices for adjusting premiums, etc. The new table enables an accountant to divine a result involving figures up to 10,000 almost at a glance. For insurance companies, railway clerks, and others, it will save much time and greatly lighten labor. The author may be addressed, care of American Express Company, Chicago, Ill.

TARIFF REVISION, a Reply to the Proceedings of the Philadelphia Drug Exchange on the Proposed Revision of Tariff. By Daniel C. Robbins. New York city: Thitchener and Gastaeter, 14 and 16 Vesey street.

An able and convincing argument against a grinding and unjust monopoly.

ON THE DUPLICITY OF THE PRINCIPAL STAR OF *Nu* SCORPIONIS. By S. W. Burnham. Reprinted from the Royal Astronomical Society's Monthly Notices.

Mr. Burnham is continuing his valuable labors on the double stars, and the paper now before us is a report of an interesting investigation of one of the most remarkable of the binary heavenly bodies.

SKEW ARCHES: Advantages and Disadvantages of Different Methods of Construction. By G. W. Hyde, C. E. Price 50 cents. New York city: D. Van Nostrand, 23 Murray and 27 Warren streets.

A valuable treatise on an interesting and somewhat difficult branch of engineering science. It is issued in Mr. Van Nostrand's excellent Science Series.

Recent American and Foreign Patents.

Improved Earth Auger.

Andrew M. Hanna, Kosciusko, Miss.—A cylinder, made of heavy sheet metal, carries a cross bar, to which are bolted blades which are curved into spiral form, and each of which makes about half a turn. To the rear edge of each blade is hinged a valve, which shuts down against the other cutter, so that the earth contained in the cylinder may be raised by and with it. To the upper end of the cylinder is rigidly attached a bail. The shaft is attached to the bail and to the cross bar, and is made in sections, the lower end of each upper section having a square socket formed in it to receive and fit upon the squared upper end of each lower section. The interlocked ends of the shaft sections are secured together by a bolt, pin, or key, so that the cylinder can be raised and lowered by the shaft.

Improved Ironing Board.

Henry Clay Green, Oshkosh, Wis., assignor of one half his right to John H. Gettman, of same place.—This ironing board has, at its upper end, a self-adjusting neck wire, and at the lower end a spring cross bar, and a groove for the bead on the bar. When the bar is turned back, it gives the side of the shirt or other garment a strain, and draws it tight over the board in a proper position for ironing. The shirt or garment being confined at the top of the board by the spring, which adjusts itself to the neck, any required degree of tension may be given.

Improved Hot Air Furnace.

William O. Crocker, Turner's Falls, Mass.—The cover of the base is provided with two rows of holes, communicating, respectively, with the space between the outer casing and a jacket, and the space between said jacket and the combustion chamber. The jacket is perforated by means of a conical punch, so that conical caps project over the opening, which receives the air and cuts it up into numerous jets, and throws it in contact with the radiating combustion chamber. The air which enters inside the jacket passes directly upward in contact with the combustion chamber. The top rim of the fire pot is provided with a series of perforations, so as to enable an indirect draft to take place by causing the products of combustion to pass through the top rim, down the rear side of the fire pot, under the partition plates, up the front side of the fire pot, and through the lower exit. The object of this arrangement is to cause the heated gases to pass over the entire surface of the combustion chamber.

Improved Harvester.

Frederic F. White, Stacyville, Iowa.—To the shaft are attached two chain wheels, around which pass two endless chains, which pass down along the upper sides of inclined bars, around chain wheels pivoted at the lower ends of said inclined bars and around pulleys pivoted to hangers connected with the framework of the machine. To the endless chains are attached cross bars, to the inner ends of which are pivoted the ends of the rakes. By suitable construction, as the rack bars are moved rearward, the rakes will be raised into a position at right angles with the cross bars; and as the rack bars are moved forward the rakes will be lowered into line with the cross bars. The rakes are lowered at the proper time to sweep the grain from the platform up an inclined apron and into a receiver, and raised and held up while moving back to the outer end of the platform by guides attached to the inclined bars.

Improved Single Rail Railway Car.

Chandler McWayne, Colfax, Cal.—Upon the upper ends of posts are crossheads running longitudinally with the track, and having deep longitudinal grooves in their upper sides to receive the base of the rails. The rails are supported midway between the posts by arched braces. To the sides of the posts are attached flat bars for the horizontal wheels to bear against. The car body is made with a deep longitudinal recess extending up from the middle part of the bottom of the car, so that the main weight of the car and load may be below the rail. The trucks, to which the wheels are pivoted, are pivoted in the upper part of the recess in the car body. The passengers and load of the car occupy the compartments in the sides, below the level of the rails. In the upper part of the car body, directly above the rail, is formed another compartment, the floor of which slides transversely in ways in the frame work of the car, so that, by moving the said floor toward one side or the other, the weight of the passengers or load in said compartment may serve as a counterpoise for balancing the car.

Improved Automatic Gate.

Hiram Krom, Dartford, Wis.—This improved gate is constructed in duplicate and aligned parts, rigidly connected to and turning upon a central pivot post, to which weighted cords are attached. The latches are so connected together as to operate simultaneously.

Improved Stirrup.

Joseph B. Waggoner, Athens, Ill.—The bottom turns horizontally on its ends in a yoke, which is pivoted to a suspending yoke which is swiveled to a suspending strap, so that it can turn in a vertical axis. The combined movements thus afforded cause the stirrup to adjust itself to the foot, so as to allow the latter to slip out without the possibility of being caught.

Automatic Car Brake.

F. L. Kirtley, Cleburne, Texas.—This invention consists in improving automatic car brakes by connecting the brake lever with a sliding drawbar, so that, as soon as the engine slows up, the drawbar is forced back by contact with that of the next adjacent car, and the brake shoes applied to the wheels. The drawbar or buffer is jointed so that the shoes may remain aloof from the wheels whenever the cars are backed.

Improved Extensible Safety Bridge.

William Campbell, Floyd C. H., Va.—This invention consists of a series of bars arranged crosswise of the car loosely on rods, which project from and slide forward and backward in another bar connected to the car for supporting them. The loose bars are linked together at the ends to limit the extent to which they may be separated; and the outermost bar of each platform is contrived to couple with the corresponding bar of another car. A practical platform is thus formed whereon persons may walk with safety from one car to the other when the cars are in motion, or the platform may be permanently connected at the middle in one part only for two cars, and be connected and disconnected with a car at one or both ends.

Improved Compound for Scouring White Goods.

Moritz Mayer, 271 East 10th Street, New York city.—This invention is an improved compound for cleaning and dressing white kid gloves and shoes of morocco, sheep, satin, cloth, and similar white fabrics, so as to restore their original glaze and whiteness. The compound consists of a mixture of French chalk and salts of sorrel in water, under an addition of a small quantity of oxalic acid and bicarbonate of soda. The compound is applied by a small sponge to the articles to be cleaned, giving them one or more coats, as required, each coat being exposed to the open air for drying. The inventor claims that any soiled or discolored parts, ink spots, etc., will be completely cleaned without hardening or injuring the fabric, which retains its original pliability, and is restored by the dressing to its former whiteness and luster.

Improved Excavator.

John S. Whitescarver and William C. Whitescarver, Pontiac, Ill.—By suitable construction, by operating a lever, the point of the plow may be raised and lowered, to cause it to run shallower or deeper in the ground. By other devices, a frame may be moved out and in to tighten or slacken an endless apron. The machine may be adjusted to carry the earth up a high grade, or even discharge it into a wagon, and the inner end of the carrier may be readily adjusted to, and held securely at, any desired hight from the ground to receive the earth from the plow.

Improved Railway Track Closer.

Isaac N. Haines, Pomeroy, Pa.—This invention consists of blocks of suitable size, which extend with their top parts over the rails, and slide in base shoes by the action of lever and double crank connections, so as to put the blocks simultaneously on or off the track.

Improved Extensible Ladder.

Edward Clark, New York city.—To the lower part of the side bars of the upper section are pivoted bars, which, when the said upper section is extended, overlap the upper parts of the side bars of the lower section, and are secured by bolts and nuts. This construction makes the joints between the sections the strongest part of the ladder. The novel features in this invention, which is composed of sliding sections, are as follows: To the side bars of the lower section are pivoted two buttons, the lower ends of which are notched to fit upon the rear upper corners of the steps to support the sections. This construction allows a pawl to be thrown back, and cords to be detached from pulleys, allowing the pulley shaft to be used for hoisting purposes.

Improved Refrigerator Car.

Richard Armiger, Baltimore, Md.—This invention consists in making the ice and provision chambers entirely distinct and air-tight, so that the moisture from the provisions and in the provision chamber will be condensed at the top and held there in troughs, the provisions being perfectly dry as well as cold. In this state they keep their freshness and flavor during a travel over great distances.

Improved Ore Concentrator.

James V. Pomeroy, Boulder, Col. Ter.—This invention consists of a series of ore pans or troughs, which are placed in detachable manner in a supporting frame, to which reciprocating motion is imparted by concussions with suitable actuating mechanism. The pans are connected by one of the sides being of suitable inclination, and overlapping the edge of the adjoining pan, for facilitating the wave motion of the water, and the separation of light particles on the motion of the frame.

© 1875 SCIENTIFIC AMERICAN, INC

Business and Personal.

Charge for Insertion under this head is $1 a Line.

Hoadley Portable Engines. R. H. Allen & Co., New York, Sole Agents of this best of all patterns.

For Sale—Large lot second hand Machinists' Tools, cheap. Send for list. I. H. Shearman, 45 Cortandt Street, New York.

Microscopes, from 50 cts. to $500, for Scientific investigation and home amusement. Magnifying Glasses, Spy Glasses, Telescopes, and Lenses. Price List free. McAllister, M'f'g Optician, 49 Nassau St., New York.

Small Gray iron castings made to order. Hotchkiss & Ball, Foundrymen, West Meriden, Conn.

"Book-Keeping Simplified."—The Double-entry system briefly and clearly explained. Cloth, $1. Boards, 75 cts. Sent postpaid. Catalogue free. D. B. Waggener & Co., Publishers, 424 Walnut St., Philadelphia, Pa.

Wood Planers—Five 2d H'd Wood Planers for Sale Cheap; 1 2d H'd 30 H.P. Boiler. Wm. M. Hawes, Fall River, Mass.

Rare Chance—Complete set Sci. Am. for Sale.—E. B. Gilman, Dansville, Liv. Co., N. Y.

Machinist's Tables, Price 25 cts. E. B. Knight, Manayunk, Philadelphia, Pa.

For Sale—Model Engine. Address W. E. Lewis, Cleveland, Ohio.

Soap Stone Packing, in large or small quantities. Greene, Tweed & Co., 18 Park Place, New York.

Moss Agates, Petrified Bones, Wood, Shells, and other curiosities, will be sent C. O. D. by S. H. Wright, Church Buttes Station, Winta Co., Wyoming Ter.

We can commend Messrs. Geo. P. Rowell & Co., of New York, to those of our patrons who may have occasion to advertise in papers beyond their immediate vicinity, as the firm have business relations with the press throughout the whole country.—[Quincy (Ill.) Whig.]

A competent Civil Engineer, experienced in the construction of Water Works, Reservoirs, Dams, &c., desires an engagement. Address Lock Box 637, Poughkeepsie, N. Y.

Scale in Boilers Removed—No pay till the work is done. Send for 34 page pamphlet. George W. Lord, Philadelphia, Pa.

Small Engines and Boilers, $25 to $50 each. Address N. Sohn, Manchester, N. H.

For Sale—One second hand Horizontal Engine, 20 in. x 48 in. stroke, Puppet Valves, Stevens' Cut-off, Fly Wheel, 14 ft. by 26 in., face turned. Also, one second hand do., 12 in. x 16 in., Slide Valves, Variable Cut-off, Fly Wheel, 8 ft. diam., 12 in. face. Clute Brothers & Co., Schenectady, N. Y.

Hotchkiss & Ball, West Meriden, Conn., Foundrymen and Workers of Sheet Metal. Will manufacture on royalty any Patented articles of merit.

Wanted—To sell a half interest in a large, well established business, secured by original patents. C. H. Kirkpatrick, Lafayette, Ind.

See N. F. Burnham's Turbine Water Wheel advertisement, next week, on page 13.

Diamonds and Carbon turned and shaped for Scientific purposes; also, Glaziers' Diamonds manufactured and reset by J. Dickinson, 64 Nassau Street, N. Y.

2nd Hand Engines and Boilers for Sale at Low Prices. Address Junius Harris, Titusville, Pa.

The "Lehigh" Emery Wheel. A new patent. Address Lehigh Valley Emery Wheel Co., Weissport, Pa.

Steam and Water Gauge and Gauge Cocks Combined, requiring only two holes in the Boiler, used by all boiler makers who have seen it, $15. Hillard & Holland, 57 Gold St., New York.

A Valuable Patent of Cast Iron for Sale or on royalty. Box 54, Westchester, Westchester Co., N. Y.

For Blind Fastenings, Securely locking Blinds, top and bottom, preventing sagging, warping, and rattling, address Philipp Weigand, Westchester, Westchester Co., N. Y.

Rubber and Oak Tanned Leather Belting.—Greene, Tweed & Co., 18 Park Place, New York.

Pipe and Bolt Threading Machines. Prices from $80 up. Address Empire Manufacturing Company, 48 Gold Street, New York.

Johnson's Universal Lathe Chuck. Medal awarded by the Franklin Institute for "durability, firmness, and adaptation to variety of work." Lambertville Iron Works, Lambertville, N. J.

For best Bolt Cutter, at greatly reduced prices, address H. B. Brown & Co., 25 Whitney Avenue, New Haven Conn.

Bolt Headers (both power and foot) and Power Hammers a specialty. Forsaith & Co., Manchester, N.H.

Hydrant Hose Pipes and Screws, extra quality, very low. Send for prices. Bailey, Farrell & Co., Pittsburgh, Pa.

American Metaline Co., 61 Warren St., N.Y. City.

Grindstones, 2,000 tuns stock. Mitchell, Phila., Pa.

Small Tools and Gear Wheels for Models. List free. Goodnow & Wightman, 23 Cornhill, Boston, Mass.

Peck's Patent Drop Press. Still the best in use. Address Milo Peck, New Haven, Conn.

The "Scientific American" Office, New York, is fitted with the Miniature Electric Telegraph. By touching little buttons on the desks of the managers signals are sent to persons in the various departments of the establishment. Cheap and effective. Splendid for shops, offices, dwellings. Works for any distance. Price $6, with good Battery. F. C. Beach & Co., 246 Canal St., New York, Makers. Send for free illustrated Catalogue.

Hotchkiss Air Spring Forge Hammer, best in the market. Prices low. D. Frisbie & Co., New Haven, Ct.

For Solid Wrought-iron Beams, etc., see advertisement. Address Union Iron Mills, Pittsburgh, Pa. for lithograph, &c.

Spinning Rings of a Superior Quality—Whitinsville Spinning Ring Co., Whitinsville, Mass.

All Fruit-can Tools, Ferracute W k's, Bridgton, N. J.

For best Presses, Dies, and Fruit Can Tools, Bliss & Williams, cor. of Plymouth and Jay, Brooklyn, N. Y.

Mechanical Expert in Patent Cases. T. D. Stetson, 23 Murray St., New York.

For Solid Emery Wheels and Machinery, send to the Union Stone Co., Boston, Mass., for circular.

Faught's Patent Round Braided Belting—The Best thing out—Manufactured only by C. W. Arny, 301 & 303 Cherry St., Philadelphia, Pa. Send for Circular.

Hydraulic Presses and Jacks, new and second hand. Lathes and Machinery for Polishing and Buffing Metals. E. Lyon, 470 Grand Street New York.

The Lester Oil Co., 183 Water St., N.Y., Exclusive Manufacturers of the renowned Synovial Lubricating Oil. The most perfect and economical lubricant in existence. Send for Circular.

For 13, 15, 16 and 18 inch Swing Engine Lathes, address Star Tool Co., Providence, R. I.

Three Second Hand Norris Locomotives, 16 tuns each; 4 ft. 8½ inches gauge, for sale by N. O. & C. R. R. Co., New Orleans, La.

Agents.—100 men wanted; $10 daily, or salary selling our new goods. Novelty Co., 300 Broadway, N.Y.

For Tri-nitroglycerin, Mica Blasting Powder, Electric Batteries, Electric Fuses, Exploders, Gutta Percha Insulated Leading Wires, etc., etc., etc., result of seven years' experience at Hoosac Tunnel, address Geo. M. Mowbray, North Adams, Mass.

Genuine Concord Axles—Brown, Fisherville, N.H.

Temples and Oilcans. Draper, Hopedale, Mass.

Price only $3.50.—The Tom Thumb Electric Telegraph. A compact working Telegraph Apparatus, for sending messages, making magnets the electric light, giving alarms, and various other purposes. Can be put in operation by any lad. Includes battery, key, and wires. Neatly packed and sent to all parts of the world on receipt of price. F. C. Beach & Co., 246 Canal St., New York.

Machinery Wanted—Edging, Milling, and other Gun Machines wanted, new or second hand. Address E., Box 1758, New York.

Single, Double and Triple Tenoning Machines of superior construction. Martin Buck, Lebanon, N. H.

Notes & Queries

S. W. & Co. will find a recipe for black finish on German silver instruments on p. 283, vol 31.—W. H. S. will find a recipe for fine blacking on p. 288, vol. 31.—J. G. will find a recipe for hair stimulant on p. 363, vol. 31.—R. can clean his rusty guns by using the method described on p. 299, vol. 31.—A. C. C. can stereotype by the paper process as described on p. 363, vol. 30.—J. B. J. can cement marble to granite by using the preparation described on p. 251, vol. 31.—J. B., Jr., will find a full description of colored glass on p. 43, vol. 32.—W. H. H. can preserve eggs by the process described on p. 219, vol. 31.—F. W. A. can mend cracks in cast iron stoves with the cement described on p. 409, vol. 31.—J. C. J. will find directions for making picture canvases on p. 75, vol. 32.—H. L. W. and others will find a description of the production of gelatin relief plates on p. 272, vol. 32.—W.S. H. will find directions for gilding with leaf on p. 347, vol. 31.—W. B. can bronze iron articles by the method described on p. 283, vol. 31.—J. K. A. will find a recipe for a depilatory on p. 362, vol. 32, and for indelible ink on p. 111, vol. 27.—J. McS. should consult Bourne "On the Screw Propeller."

(1) L. J. asks: What composition can I apply to an irregularly shaped brick wall, so as to protect the mortar effectually from the effects of the vinegar generated in apple pomace? A. Coat with tar.

(2) J. H. S. asks: What will remove so-called indelible ink from linen without injury to the fabric? A. Marking inks containing nitrate of silver may be removed by rubbing the spot with a little cyanide of potassium; but it is well to caution those who use this latter salt for this purpose, as it is a dangerous corrosive poison and should be handled with the greatest care, always avoiding any possibility of its getting into an open cut.

(3) A. T. asks: Which is the best external coating with which to paint a cask in which soda water is to be charged and kept for six or seven months? The coating should prevent the escape of carbonic acid gas. A. The carbonic acid would make its escape through any such coating on a cask.

(4) A. B. S. says: Along the Mississippi river, where the water is used for drinking purposes, it is the custom to draw twenty or thirty gallons, which is put into a large earthen vessel, and then a teaspoonful of powdered alum is added and stirred up with the water to clarify it and throw down the sediment, which it does effectually. How does it act? A. The sulphuric acid of the alum unites with the lime held in solution in the water, and forms an insoluble salt which precipitates, and in settling carries down the other impurities with it.

(5) H. E. N. asks: Where can I find a description of Pettenkofer's method for estimating the carbonic acid and ammonia in the air? A. Consult Angus Smith's work entitled "Air and Rain."

(6) W. W. F. asks: 1. What is the gravity of a body which weighs 900 lbs. at the earth's surface, at the distance of 3 miles in the air? A book states that, at 1,656 miles, any object would lose ½ of its weight. Please give a simple rule to work this. A. The question is solved by the equation: $g=g'\frac{(R+h)^2}{R^2}$, where g is the intensity of gravity at the hight required, g' its intensity at sea level, R= radius of the earth, h=the hight desired. If g=32 feet, R=4000 miles, h=1656 miles, then $32=g'\frac{(4000+1656)^2}{(4000)^2}$, and g'=16 feet, which is one half its value at sea level.

(7) R. asks: Will an ordinary gas meter register more without the gas being lighted than if it is lighted, the burners in each case being open alike? A party connected with one of the gas companies of New York has been appealed to, and he states as the result of experiments that about 4 per cent more gas passes through the burners when unlighted than when lighted. Is this correct? A. The difference in rate is due to the difference in density and temperature of the unlighted gas and the products of combustion.

(8) M. W. M. asks: What is the simplest and most effective hygrometer now in use, and how can I make one? A. Place side by side two accurate thermometers, the bulb of one of which should be covered with muslin and kept constantly moist by means of a string or small wick which dips into a reservoir of water below. Evaporation takes place from the moistened bulb which depends upon the dryness of the air; and by the coldness thus produced, the mercury in the thermometer is correspondingly depressed. By comparing the difference between the two thermometers, and referring to a published table, you can easily determine the dew point, etc.

(9) J. W. D. E. asks: Is there any kind of cement or other substance that would render a wooden vessel impervious to air and water under a pressure of from 2 to 4 atmospheres? A. You failed to state for what purpose the cask is intended to be used, or the nature of its contents, whether liquid or gaseous, or the conditions of temperature. It is obviously necessary that all this should be known before any one cement can be recommended.

(10) W. P. K. asks: 1. Can borax be used for toning photo prints in lieu of gold? A. Borax has been used with chloride of gold, in place of carbonate of soda. 2. What can cheaply replace gold chloride? A. The old process of sulphur toning is sometimes employed for cheap prints; but although the tone produced by this method bears a close resemblance to that produced by the gold bath, it renders the picture less permanent. The process of sulphur toning consists in adding to the fixing bath of hyposulphite of soda, on immersing the print therein, a few drops of acetic acid, which renders the bath opalescent. This is due to the liberation of sulphur in a very finely divided condition.

What can be used in a small blast lamp furnace? A. Alcohol.

How can I mount a thin glass electrical wheel so that it shall run truly, the center hole being small? A. Place at each side of the plate a small thick disk of hard rubber, fastened securely to the axle, and having between it and the plate a thin washer of soft rubber, the same size as the disk.

(11) J. H. asks: 1. How can I distinguish an imitation from a real diamond? A. In the case of certain silicates, hydrofluoric acid would answer by attacking them; but in the case of various other imitations, it would be necessary to resort to other measures, such as specific gravity, difference of refrangibility of light, etc. 2. Would fluoric acid act on a real stone? A. Hydrofluoric acid is without action on the diamond.

(12) C. F. G. asks: What is the best kind of iron for electro-magnet cores? A. Swedish charcoal iron.

(13) W. O. asks: Will a lightning rod be safe if it runs down inside of a barn, boxed up? I built an addition to my barn on the side where the rod formerly went down on the outside, leaving the rod where it was, and boxing it. A. If the rod was safe before, it is so now. The main thing is to make a good ground connection. It should terminate in earth constantly wet, and have two or three long lateral branches.

(14) L. & D. say: 1. We have a telegraph line ⅝ of a mile in length, of No. 11 galvanized iron wire, and want to use four sounders, magnet wire No. 23, copper covered. How many cups of 4½×7 inches Callaud must we use? A. Twelve cells. 2. What is the most suitable battery to use on 70 feet of copper circuit for an electric bell, and how many cells? A. Six cells of Léclanché. 3. What kind of battery shall we use for nickel plating? A. Two cells of Callaud.

(15) J. M. says: I tried the recipe given by W. H. S. on p. 132, vol. 32, for making a cheap galvanic battery for plating. I used a quart fruit jar and sheet iron for plates. What kind of wire should I use? Will it succeed? A. Use copper and zinc plates instead of iron. This will answer best for plating. You will find instructions for gold, silver, and nickel plating in recent back numbers.

(16) E. W. P. asks: 1. In making electro-magnets, is the wire wound on the cores in a continuous coil, like cotton on a spool, or is each layer wound separate and the ends afterwards joined together? A. In a continuous coil. 2. In the Tom Thumb battery, is it absolutely necessary to have a septum of paper around the zinc plate? A. Yes. 3. How large a battery would it take to drive an electric engine for a small boat 3 feet long? A. About 150 of Bunsen's large sized cells.

1. Does the term squaring the circle mean finding a square of the same area as the given circle? A. Yes. 2. Why will not the square root of the area of any circle give the length of one side of a square of equal area? A. It will; but how do you measure your circle?

(17) B. S. F. asks: 1. How can I make iron soft for making electro-magnets? A. Anneal it. 2. Can steel be made softer than iron? A. No.

(18) B. B. asks: Please give me directions for making a small galvanic battery. A. Take a glass tumbler, and place in the bottom a sheet of copper, having an insulated wire attached and extending out of the tumbler. Cover the copper with blue vitriol, and suspend a sheet of zinc near the top. Fill the tumbler with water. Connect the zinc and copper together for 48 hours and the battery will be ready for use.

(19) H. S. J. says: In your issue of April 7, in answer to the question: "How can I prepare mucilage for office use?" you tell F. M. A. to "add a little Blätter sulphate of quinine to it, to prevent molding." What is Blätter sulphate of quinine, and in what does it differ from the officinal sulphate? A. The term Blätter sulphate of quinine probably refers to the bisulphate, which crystallizes in thin plates, and not to the normal sulphate, which forms silky needles.

(20) G. C. M. asks: How can I purify fat oils? I have filtered them and obtained them in a very clear state, depriving them of their color, but I am at a loss how to rid them of their taste and smell. A. Try the addition of a very small quantity of iodate of calcium, and allow to stand 24 hours or more before filtering.

(21) G. W. H. says: 1. I want to light gas by electricity. What size and length of platinum wire shall I use for one burner? A. Of the size of a pin and half an inch long. 2. I want to make an electro-magnet to lift a small weight. What sized wire, and how much, shall I wind on it? A. Seventy-five feet of No. 14 copper wire.

(22) W. J. T. says: I have just finished the construction of a Rhumkorff coil; it gives a severe shock but no spark unless the ends of the secondary wire are almost touching, when a minute spark is perceptible; and the increase of battery power does not increase the length of spark. The coil is constructed as follows: Primary wire, No. 16, copper, about 150 feet, cotton covered. Secondary wire, 7,000 feet No. 24 American gage, copper, not covered, but wound so that a paraffined cotton thread of the same size as the wire is interposed between each coil. Each layer of secondary wire is insulated from the succeeding one, by two thicknesses of paraffined paper, care being taken that, at the ends of the coil, the wires did not slip over the insulating paper and so come in contact. The core consisted of No. 20 annealed iron wire, ¾ inch in diameter and 10 inches long, cemented together with paraffin and introduced in the primary wire. The condenser has 60 sheets tin foil, 5x11 inches, laid between paraffined paper 7x11, and properly connected with the two parts of the circuit breaker. What is the trouble? Probably the first thought that would occur to you would be that the condenser was either improperly made or improperly connected with the primary wire; but that is not the case, as the same condenser works well with another coil in which the secondary wire is somewhat finer, but no longer. A. Use No. 40 wire for the secondary coil.

(23) A. W. asks: Is a quantity of frictional electricity as intense as a similar quantity of voltaic electricity? A. Yes, very much more.

(24) A. R. says: 1. A Russian claims to have invented an electric light: A small tube of glass is filled with a pencil of charcoal, the air is exhausted, and the tube hermetically sealed. A moderate current of electricity is then passed through the charcoal from an ordinary electro-magnetic machine, causing it to glow with a very brilliant, but at the same time soft, light. It is stated that the charcoal lasts for an indefinite period, and that the current required is so small that two hundred of these lights can be easily maintained by a single machine. Does such an apparatus require two carbon points slightly separated, or is the carbon in one piece, filling the tube as described? A. Two carbon pencils are used. One is attached to one pole of the machine, and the other to the other. 2. What is meant by the single machine? A. A single machine means simply one machine. No such results as claimed can be attained.

(25) G. J. W. asks: How can I dye kid gloves black or brown? A. The dyes may be applied either by immersion or by brushing over the surface. The latter method is more ordinarily practised.

(26) W. B. asks: What is suitable for staining a brick wall cherry red, so that it will hold its color? A. It is the practice to paint such walls. Clay can be so stained by oxide of iron, but not the finished brick.

(27) E. E. M. says: I have a work on electricity which tells me that a hollow coil of wire, through which a current of electricity is passing, will draw in an iron bar. I have been trying to make such a coil, but have failed. Will you give me the proper directions? A. Take a small rod of wood 4 inches long, and fasten at each end a disk of wood 2 inches in diameter. Wind copper wire, covered with cotton in close spirals, over the rod and between the two disks, filling the entire space. Then remove the coil and you have the helix. Now connect the two ends of the wire of the helix with the poles of a battery of two large Bunsen's cells, and the coil will attract a small iron bar to its center.

(28) J. G. T. says: 1. I wish to bring a stream of water from a reservoir, in a 1 inch pipe, down a hill and across a level to the bottom of the hill. The fall is 100 feet. How high will it throw the water at the foot of the hill? A. If your pipe is smooth inside, has no sudden bends, and is not too long, and you place at its lower end a conical jet of small aperture, you may throw it half the hight of the fall, or a little more. 2. How high would it throw water if the length of the pipe were 600 feet? A. For such a distance you will need a pipe of larger diameter, otherwise you may not throw the water up more than 20 feet or thereabouts. 3. How much pressure will there be on the square inch under 60 feet head and 100 feet head respectively? A. At 60 feet 26 lbs., at 100 feet 43 lbs., provided the water is at rest; when running, the pressure becomes much less, and then depends on the velocity of the flow and the distance from reservoir.

(29) W. P. D. asks: How can I calculate the amount of air in a given quantity of water, at ordinary temperatures and pressures? A. Water at the moderate temperature of 68° Fah. and 30 inches barometric pressure (15 lbs. to the square inch) contains 0·042 volumes of air, or a little over 4 per cent; a cubic foot (1,728 cubic inches) will contain 72½ cubic inches of air. But the air differs from the ordinary air in that, while the latter consists of 4 parts of nitrogen to 1 of oxygen, the air contained in the water consists of 1 part nitrogen to 2 of oxygen. When the temperature descends, the water dissolves more air; at 50° Fah. the proportion is 0·05 parts or 5 per cent, at 32°, 0 06 or 6 per cent. When the temperature ascends, the air is driven out; while, when the pressure increases, the volume of air contained is exactly proportionate to the pressure, so that, at 2 atmospheres or 30 lbs. pressure, water will dissolve 8 per cent of air, at 6 atmospheres or 90 lbs., 24 per cent, etc.

© 1875 SCIENTIFIC AMERICAN, INC

(30) B. B. asks: What is the proper quantity of soda and tartaric acid to be used to a pound of flour? A. Use 2 scruples bicarbonate of soda and 4½ drachms cream of tartar.

(31) J. H. C. asks: How can I amalgamate nickel and mercury? The nickel melts at a very high heat and the other is fluid at common temperature and is very volatile at a high heat. A. Nickel does not form an amalgam with mercury.

(32) A. S. L. asks: 1. How can I make nitrate of silver (for photography) out of good coin silver? A. Dissolve the coin in pure nitric acid and evaporate the solution to dryness. Ignite the residue until all of the nitrate of copper is decomposed. The residue is next to be exhausted with pure water, and the solution filtered and left to crystallize. These crystals should be redissolved in distilled water and re-crystallized. 2. How can I make gold solution (for the toning bath) out of coin gold? A. Place the coin in any convenient vessel, and pour over it a little nitric acid mixed two and one half times its weight of hydrochloric acid and three times its weight of water; digest at a gentle heat, but do not boil the acid, or much of the chlorine will be driven off in the form of gas. At the expiration of a few hours add a fresh portion of nitro-hydrochloric acid, the same as at first. Continue this until the coin is completely dissolved. Then decant into another vessel carefully, so as not to disturb any sediment of chloride of silver at the bottom of the vessel. Next, dilute largely with distilled water, and add a filtered aqueous solution of common sulphate of iron (6 parts to 1 of gold). Collect the precipitated gold, which is now free from copper, and dissolve in *aqua regia* as at first, and evaporate to dryness on a water bath.

(33) H. L. N. asks; How can I best remove ink spots from writing paper, so as not to injure it? A. Wash with a camel's hair brush dipped alternately in oxalic acid and cyanide of potassium.

(34) L. F. B. says, as to the hight at which a tree has to be cut so that its top will strike a given point on the ground: Square the hight of tree and the given distance from tree to point. Divide the difference of these squares by twice the hight of tree, and the quotient will be the hight from the ground where the tree has to be cut. Example: Hight of tree=60 feet, distance of point to the tree 20 feet; then $60^2=3{,}600$, $20^2=400$, difference=3,200. $3{,}200\div(2\times60)=26{\cdot}6$ feet.

MINERALS, ETC.—Specimens have been received from the following correspondents, and examined, with the results stated:

We have received a handsome stereoscopic picture made by Mr. E. H. Train, photographer, Helena, Mon. Ter., of octohedral crystals of gold. It was sent by Charles Rumley, Esq.—A specimen of galena has been received, inclosed by a mineral supposed to be kaolin. It was, in fact, sulphate of barytes or heavy spar.—N. J.—It is clay, with some carbonaceous matter and a trace of oxide of iron. —P. F. T.—It is spiegeleisen, a kind of cast iron containing a large percentage of manganese and used in making Bessemer steel.—J. A. T.—No. 1 is hematite coated with crystals of ferruginous quartz. No. 2 is wulferite. No. 3 is analcite.—G. G. B.—It is mispickel, and consists of arsenic 46 per cent, sulphur 20 per cent, and iron 34 per cent. It possibly contains some cobalt, but the samples sent were too small to determine this. It has previously been found at Franconia, Jackson, and Haverhill, N. H.—O. A. B.—It is pyroxene, a silicate of lime, magnesia, iron, and manganese. The percentage of iron is not large enough to make it valuable as an ore.—R. T. P.—It is a mixture of clay with grains of quartz and felspar.—S. L.—It is a portion of a large octohedral crystal of iron pyrites.—C. H. W. Jr.—It is white crystaline limestone.—G. W. B.—There was rot sufficient for complete analysis, but there was found to be some chloride of sodium or salt, some sulphate of iron, and oxide of iron.—F. H. McK.—It is a mixture of silex and mica, and appears similar to powder from rocks underlying the coal.

COMMUNICATIONS RECEIVED.

The Editor of the SCIENTIFIC AMERICAN acknowledges, with much pleasure, the receipt of original papers and contributions upon the following subjects:

On Decay of Teeth. By E. D. P.
On the Mouths of the Mississippi. By O. P. S.
On the Inventive Power. By A. A. M.
On Lightning. By D. B.
On Powder Mill Explosions. By C. H. R.
On Fire Escapes. By L. K. Y.
On the SCIENTIFIC AMERICAN. By D. B.
On the Iron Horse. By F. H. R.
On the Potato Bug. By T. A. C.
On the Fireless Locomotive. By F. G. W.

Also enquiries and answers from the following.

E. H. S.—T. J. F.—A. L. P.—J. B. J.—M. R.—C. C. J. —H. C. T.—J. S. B.—W. C. B.—A. E. Z.—A. L. F.— W. H. G.—H. K.—W. H. L.—C. H. C.—G. M. M.— C. & N.—J. P. H.—E. M. B.

HINTS TO CORRESPONDENTS.

Correspondents whose inquiries fail to appear should repeat them. If not then published, they may conclude that, for good reasons, the Editor declines them. The address of the writer should always be given.

Enquiries relating to patents, or to the patentability of inventions, assignments, etc., will not be published here. All such questions, when initials only are given, are thrown into the waste basket, as it would fill half of our paper to print them all; but we generally take pleasure in answering briefly by mail, if the writer's address is given.

Hundreds of enquiries analogous to the following are sent: "Who furnishes information as to water wheels? Who makes the most accurate water meper? Who buys sumac? Who makes mercury air tumps? Who sells the best blower for using with a cupola?" All such personal inquiries are printed, as will be observed, in the column of "Business and Personal," which is specially set apart for that purpose, subject to the charge mentioned at the head of that column. Almost any desired information can in this way be expeditiously obtained

[OFFICIAL.]

INDEX OF INVENTIONS

FOR WHICH

Letters Patent of the United States were Granted in the Week ending

May 25, 1875,

AND EACH BEARING THAT DATE.

[Those marked (r) are reissued patents.]

Addressing machine, H. H. Herr ... 163,773
Advertising device, C. W. Reed ... 163,608
Alarm, burgler, F. H. Hunter ... 163,779
Apple parer, E. L. Schauck ... 163,813
Axle box, F. Keiser ... 163,783
Baby tender and crib combined, A. Baird ... 163,625
Bale tie, J. M. Goldsmith ... 163,649
Bale tie, J. N. Smith ... 163,815
Bale tie, cotton, J. W. Philp ... 163,803
Barrel faucet attachment, A. Zoller ... 163,717
Barrel making machine, J. Y. Chapman ... 163,740
Bed bottom, W. Wood ... 163,714
Bed bottom, invalid, Ogborn and Kendrick ... 168,684
Bed bottom, spring, E. O. Bennett ... 163,627
Bed bottom, spring, E. P. Carter ... 163,574
Bedstead fastening, W. H. Elliot (r) ... 6,447
Bedstead fastening, W. H. Elliot ... 163,757
Bell pull, C. Clay ... 163,741
Bill file, C. Davis, Jr ... 163,750
Bird cage mat, A. B. Hendryx ... 163,772
Bolts, rounding ends of, J. Nelson ... 163,797
Boot and shoe, laced, P. Plant ... 163,804
Box making machine, J. Kisor ... 163,788
Brewing, E. H. Wiegand ... 163,827
Bridge, iron, J. B. Eads (r) ... 6,444, 6,445, 6,446
Bronzing machine, W. J. Barber ... 163,722
Bucket, dinner, F. E. Heinig ... 163,654
Buckle or fastener, Lockwood and Ware ... 163,596
Bullets, swaging, W. D. Hillis ... 163,656
Burner, argand gas, E. R. Walker (r) ... 6,453
Burner, vapor, Brown and Watkins ... 163,634
Burner, gas, F. M. McGeorge ... 163,600
Butter-coloring compound, J. C. Rorick ... 163,610
Butter package, H. W. Campbell ... 163,573
Car axle box, A. A. Freeman (r) ... 6,449
Car brake, J. Y. Smith ... 163,612
Car coupling, W. H. Adams ... 163,718
Car coupling, P. Brown ... 163,633
Car coupling, Conner and Fritz ... 163,746
Car coupling, L. W. Powis ... 163,806
Car-coupling link, J. M. Clem ... 163,743
Car doors, operating, D. R. Hart ... 163,770
Carpet stretcher, A. D. Williams ... 163,712
Carriage, child's, W. Wuerz ... 163,715
Carriage curtain fastening, C. P. Ketterer ... 163,663
Carriage jack, R. Eldridge ... 163,756
Carriage jack, H. E. Nittenger ... 163,798
Cartridge box, G. E. Bringman ... 163,570
Chain and wheel, power, J. H. Whitney ... 163,832
Chair, pivot, J. Lemman ... 163,790
Chair, tilting, J. M. Waters ... 163,705
Chairs, etc., bottom for, C. D. Flynt ... 163,760
Cigar box, C. A. Siecke (r) ... 6,458
Circuit closer, electrical, L. L. Duerden ... 163,753
Clothes pounder, W. H. Castle ... 163,739
Coal hod, J. B. Driscole ... 163,751
Copper bottom for kettles, A. Cummings ... 163,747
Corset, L. H. Foy (r) ... 6,448
Corset, C. L. Olmstead ... 163,685
Cotton seed huller, F. Streuby ... 163,702
Crimping machine, O. Noack ... 163,602
Cup, berry, D. W. Kniffin ... 163,665
Cylinder cam, M. J. Carney ... 163,738
Dental flask, W. C. Tracy ... 163,615
Dental mirror, T. Cogswell ... 163,578
Dentist's vulcanizing apparatus, H. M. Edson ... 163,755
Desk, folding seat, U. Smith ... 163,611
Drill, steam engine, J. Brandon ... 163,631
Drill valve movement, D. Kennedy ... 163,785
Drying sized fabrics, W. H. Palmer, Jr ... 163,801
Eaves trough hanger, J. F. and L. Hess ... 163,655
Elevator, hydraulic, T. Stebins (r) ... 6,459
Engine governor, steam, A. Kendall ... 163,662
Engine, portable steam, L. Sweet ... 163,823
Engine, steam, C. W. Hermance ... 163,773
Engine, rotary, O. Burnett ... 163,572
Engine, traction, W. H. Milliken ... 163,681
Engine fire kindler, F. Beanfait ... 163,723
Engine oscillating valve, W. Haddock ... 163,651
Fan, helical cone suction, J. White ... 163,710
Fans, mounting, G. Brueck ... 163,731
Fanning apparatus, P. J. Bender ... 163,628
Fare register, Rumming and Uderitz ... 163,695
Felly plate, J. Y. Sitton ... 163,698
Fence, farm, Hoffman and Shoemate ... 163,658
Fence, iron, M. G. Freeman ... 163,761
Fence post, E. Powell ... 163,692
Ferro-manganese, making, A. Jullien ... 163,782
Fire arm, breech-loading, W. H. Elliot ... 163,646
Fire arm, breech-loading, O. M. Robinson ... 163,810
Fire place, J. F. Merrill ... 163,678
Fire plug, water motor, W. W. Harding ... 163,652
Fracture box, C. Westerkamp ... 163,829
Furnace, heating and ventilating, S. W. Kimble ... 163,786
Furnace, metallurgic, T. D. Morgan ... 163,795
Game and other boards, C. F. Morgan ... 163,601
Game board, Gourn and Vermilye ... 163,630
Garments, cutting out, K. McKenzie ... 163,674
Gas apparatus, Smith and Goldthorp ... 163,817
Gas purifier, G. H. Wells ... 163,706
Gas purifier center valve, R. Briggs ... 163,569
Gas retort, W. Smith ... 163,818
Gate, farm, W. H. Pratt ... 163,693
Gate, sliding, J. P. McMurray ... 163,675
Generator, sectional steam, G. H. Starbuck ... 163,820
Glassware, making, W. C. King ... 163,787
Glove fastening, S. W. Glenn ... 163,764
Grain binder, J. H. Whitney ... 163,830
Grain tally, S. A. Hazelton ... 163,590
Harrow, C. Boswell ... 163,736
Harvester rake, J. H. Mears (r) ... 6,454
Harvester rake, C. Wheeler, Jr ... 163,708
Harvester rake, J. H. Whitney ... 163,831
Heddle frame, E. S. Pike ... 163,691
Hook, mousing, Johnsen & Adams ... 163,660
Hydrant, Fisher & Fiske ... 163,759
Inking apparatus for hand stamps, D. A. Edsall ... 163,585
Inkstand, S. Darling (r) ... 6,443
Jack, lifting, Fayette & Meeker ... 163,647
Jack, lifting, W. Livingstone ... 163,791
Jib hand, C. W. Clements ... 163,577
Journal bearing, etc., C. Wheeler, Jr ... 163,707
Kettles, copper bottom for, A. Cummings ... 163,747
Key fastener, H. Stretcher ... 163,822
Kiln, charcoal, W. Sparrow ... 163,700
Label holder, C. F. Barker ... 163,566
Ladder, extensible fire, J. M. Birchler ... 163,725
Ladder, extensible fire, Covel, Chace, & Weaver ... 163,580
Lamp chimney, O. D. Warfield ... 163,826
Lathe dog, C. B. Davis ... 163,640
Lathe rest, J. E. F. Leland ... 163,670
Lathe planing attachment, A. Hoffman ... 163,657
Lightning rod standard, Reyburn & Martin ... 163,807
Liquids, filtering, T. R. Sinclaire ... 163,814
Lock for bags, etc., G. Bernheim ... 163,629
Lock, permutation, E. Grah ... 163,767
Loom, J. L. Norton ... 163,799
Loom harness frame, Casey, Auel, & Johnson ... 163,575
Loom harness motion, G. Crompton, (r) ... 6,442
Loom shuttle, J. Rigby ... 163,609
Loom shuttle binder, A. Mallory ... 163,671
Lubricator, C. E. Holt ... 163,591
Mail bag fastener, R. Lee ... 163,789
Meats, preserving, W. C. Marshall, (r) ... 6,451, 6,452
Milking tube, S. A. Smith ... 163,816
Mill, feed, O. B. Knapp ... 163,684
Millstones, dressing, Savage & Coleman ... 163,811
Molding machine, Peet, Poland, & Willis ... 163,604
Moldings, enameling, W. Wallick ... 163,825
Motion for machinery, stop, J. W. Askie ... 163,624
Motor, J. G. Peterson ... 163,689
Mowing machine, Wheeler & Case ... 163,709
Music leaf turner, Cohen & Dietz ... 163,637
Musical keys, trimming of, M. Pratt, (r) ... 6,455
Nail blanks, making, T. T. Wood ... 163,619
Nails, heading, T. T. Wood ... 163,620
Net, fly, L. B. & G. W. Lee ... 163,668
Organ attachment, reed, H. R. Moore ... 163,682
Overalls, S. Deutsch ... 163,751
Oxide of zinc, making white, J. G. Trotter ... 163,704
Packing for pistons, steam, C. L. Eastman ... 163,584
Packing machine, A. Ralph, (r) ... 6,457
Painting machine, W. W. Marsh ... 163,598
Pantaloons, shaping, J. Kraft ... 163,666
Pantaloons, shaping, Viets & Shaw ... 163,617
Paper and cloth, uniting, C. H. Denison ... 163,582
Paper pulp engine, F. A. Cushman ... 163,638
Paper pulp-grinding cylinder, C. J. Bradbury ... 163,723
Paper ruling machine, W. O. Hickok ... 163,777
Pavement, wood, Filbert & Hoffman ... 163,758
Pianoforte, upright, B. E. Colley ... 163,745
Pipes, joint for lead, A. B. Goodall ... 163,588
Plane iron, J. J. Ralya (r) ... 6,462
Planing machine, C. B. Beall ... 163,567
Planing machine, C. R. Patterson ... 163,802
Planter, cotton seed, J. Dana ... 163,748
Planter, potato and seed, W. H. Whitman ... 163,711
Plow, swivel, J. Hapgood ... 163,589
Plow, wheel, Keys and De Mier ... 163,595
Plows, row gage for, W. E. Stanley ... 163,701
Pocket book fastening, L. Messer ... 163,794
Press, cotton, T. D. Power ... 163,805
Press, hydraulic, C. Peper ... 163,606, 163,607
Printer's galley, H. H. McWilliams ... 163,677
Propeller, steering, W. F. Zoehe ... 163,716
Pump, D. J. Gorton ... 163,766
Punching machine, C. A. Corman ... 163,579
Quicksilver, saving, J. W. Varney ... 163,616
Radiator, steam, S. J. Geoghegan ... 163,763
Radiator, steam, G. B. Riggins ... 163,808
Railway head stop mechanism, R. W. Hunton ... 163,593
Railway rammer head, M. A. J. Wimpee ... 163,835
Railway switch, street, G. T. Jacobs ... 163,780
Railway tunnel ventilation, J. Dixon ... 163,643
Refrigerating apparatus, G. H. Chinnock ... 163,576
Regulator with dash pot, pressure, Ball & Fitts ... 163,721
Regulator with safety valve, pressure, Ball & Fitts ... 163,720
Rubber hand, R. I. Patterson ... 163,688
Rudder post bearing, J. N. Bitting, Sr ... 163,726
Saddle spring, C. H. Harris ... 163,769
Safe, etc., fir. proof, W. A. Shepard ... 163,614
Sails, reefing, I. Solomon ... 163,819
Sash holder, W. B. Blackman ... 163,727
Sash holder, R. R. Calkins ... 163,635
Saw-filing machine, Wilson & Noble ... 163,834
Saw-setting machine, Heunsch & Beyer ... 163,776
Scaffold, W. Burge ... 163,733
Scraps or offal, etc., treating, G. S. Allyn ... 163,565
Seat, school, B. Allen ... 163,622
Seat, school, I. N. Pierce ... 163,605
Sewing machine, G. S. & A. L. Darling ... 163,639
Sewing machine ruffler, J. D. Sourwine ... 163,699
Sewing machine table hinge, H. B. Keiper ... 163,661
Sheet metal, die for forming, H. Martyn ... 163,793
Shingling bracket, A. P. Fletcher ... 163,587
Shirt, J. C. Dunham ... 163,644
Shovel, coal, J. D. Tallmadge ... 163,703
Shutter bower, etc., G. F. S. & C. Zimmerman ... 163,6.1
Sign, illuminating, C. H. Seawell ... 163,697
Skirt supporter, M. P. Bray ... 163,730
Sleighs, thill coupling for, C. H. Johnson ... 163,781
Soap, variegating, G. C. Wenzel ... 163,828
Soap, impalpable, J. P. Bryan ... 163,571
Spark arrester, locomotive, A. Berney ... 163,568
Spectacles, J. Gall ... 163,648
Spinning machine spindle, Rabbeth *et al.* (r) ... 6,456
Spool holder, C. T. Cleaveland ... 163,742
Stair curves, scribing, A. Beck ... 163,626
Stamp-inking apparatus, D. A. Edsall ... 163,585
Starch lubricant, M. E. Robinson ... 163,809
Stave jointer, J. J. Ralya (r) ... 6,461
Steamer and boiler, C. Busch ... 163,735
Stench trap drain screw, W. A. Butler ... 163,737
Stereoscope, revolving, J. E. Steward ... 163,613
Stocking supporter clasp, E. L. Howard ... 163,778
Stone extracting tool, N. R. Cheadle ... 163,636
Stone, waterproof artificial, McMurtrie *et al.* ... 163,676
Stool, camp, N. R. Allen ... 163,623
Stove, G. W. Herrick ... 163,775
Stove grate, H. P. Ohm ... 163,800
Stove implement, L. S. Hoyt ... 163,659
Stove, heating, A. Brown (r) ... 6,441
Stove, magazine, W. Doyle ... 163,583
Stove, magazine heating, G. H. Timmerman ... 163,824
Stove platform, C. Brownell (r) ... 6,460
Strainer, milk, J. W. Bray ... 163,632
Straw cutter, B. Belcher ... 163,724
Street sweeper, O. W. Kellogg ... 163,784
Stuffing box, A. J. Myers ... 163,796
Sugar, manufacture of hard, E. Langen ... 163,667
Swing, S. McClevey ... 163,599
Table, folding, G. H. Williams ... 163,833
Table slide, extension, G. B. Lyman ... 163,792
Thill coupling, C. O. Gardiner ... 163,762
Thill coupling, G. G. Larkin (r) ... 6,450
Thill coupling, S. J. Wiser ... 163,713
Ticket, L. Brush ... 163,732
Toy, J. B. Safford ... 163,696
Toy gun, W. H. Martin ... 163,673
Trace carrier and back loop, spring, W. Davis ... 163,641
Trap, animal, G. W. Kelley ... 163,5
Trap, fly, Arandall & Runyan ... 163,719
Trap, hog, H. Ogborn ... 163,603
Umbrella, folding, U. G. Steinmetz ... 163,821
Valve movement for rock drills, D. Kennedy ... 163,785
Valve, safety, T. Walker ... 163,618
Vegetable cutter, J. F. Goolsbee ... 163,765
Vehicle pole tip, Grimshaw & Osgood ... 163,768
Vehicle seat, Cloud & Craig ... 163,741
Vehicle top, L. Sawyer ... 163,812
Wagon brakes, shoe for, J. Grimste ... 163,650
Wagon tyres, heating, S. B. Hopkins ... 163,592
Wagons, brake for hay, W. Harper ... 163,653
Washing machine, R. G. Orwig ... 163,686
Watch crystals, grinding, A. C. Norton ... 163,683
Watch key, A. & F. Hathaway ... 163,771
Watch regulator, J. A. Miller ... 163,680
Watches, mainspring for, Rice & Burbank ... 163,694
Water wheel, I. Mallory ... 163,672
Water wheel gate, G. W. Dunn ... 163,754
Well point, driven, D. A. Danforth ... 163,749
Windmill, W. T. Burrows ... 163,734
Windmill, S. Cushman ... 163,581
Windmill, I. Lehmer ... 163,669
Windmill, W. W. Marsh ... 163,597
Window blind, S. W. Merrill ... 163,679
Window blind, J. Peyer ... 163,690
Wood-boring machine, J. Faraday ... 163,586
Wool-mixing machine, S. R. Parkhurst ... 163,687
Wool, etc., treating, O. Braun ... 163,729
Wrench pipe, G. D. Dean ... 163,642
Wringing machine, Eisenhart & Lauer ... 163,645

DESIGNS PATENTED.

8,338.—BURIAL CASKET.—F. A. Field, Everett, Mass.
8,339.—BASE PANEL.—M. D. Jones, Boston, Mass.
8,340.—VASE BORDER.—M. D. Jones, Boston, Mass.
8,341.—VASE PANEL.—M. D. Jones, Boston, Mass.
8,342.—TELEGRAPH KEY.—C. W. Lewis, Chicago, Ill.
8,343.—ORNAMENTAL STAR.—W. Martin, Philadelphia, Pa.
8,344 to 8,351.—CARPETS.—J. M. Christie, Kidderminster, England.
8,352 to 8,354.—BACKS OF LOUNGES.—G. Hartzell, Philadelphia, Pa.
8,355.—NECK TIE.—R. R. Parker, Indianapolis, Ind.
8,356.—LAMP POSTS.—W. Tweeddale, Brooklyn, N. Y.
8,357—CIGAR BOX.—H. Zimmermann, Chicago, Ill.

SCHEDULE OF PATENT FEES.

On each Caveat ... $10
On each Trade mark ... $25
On filing each application for a Patent (17 years) ... $15
On issuing each original Patent ... $20
On appeal to Examiners-in-Chief ... $10
On appeal to Commissioner of Patents ... $20
On application for Reissue ... $30
On filing a Disclaimer ... $10
On an application for Design (3½ years) ... $10
On application for Design (7 years) ... $15
On application for Design (14 years) ... $30

CANADIAN PATENTS.

LIST OF PATENTS GRANTED IN CANADA, May 19 to June 4, 1875.

4,754.—P. W. Hart, Camden, N. Y., U. S. Lathe machine. May 19, 1875.
4,755.—A. Tracy, Pickering, Ont. Horse power. May 19, 1875.
4,756.—A. B. Sheraton, St. John, N. B. Steam carpet cleaner. May 19, 1875.
4,757.—P. N. Rugg, Compton, P. Q. Wash bench. May 19, 1875.
4,758.—J. D. Lawlor, Montreal, P. Q. Washing machine. May 19, 1875.
4,759.—J. Aikman, North Norwich, Ont. Secret lever hinge. May 19, 1875.
4,760.—M. Lesser, Montreal, P. Q. Cigar. May 19, 1875.
4,761.—D. W. Davis *et al.*, Detroit, Mich., U. S. Preparing fish for market. May 19, 1875.
4,762.—G. W. Howell, Covington, Ky., U. S. Elbow machine. May 19, 1875.
4,763.—T. Warren, Flint, Mich., U. S. Safety stop governor. May 19, 1875.
4,764.—J. Wilson, Toronto, Ont., *et al.* Horse clipping and sheep shearing machine. May 19, 1875.
4,765.—S. W. Benham, Sweetsburgh, P. Q. Fire kindler. June 4, 1875.
4,766.—H. L. Smith, Westminster, England. Single rail railway. June 4, 1875.
4,767.—I. Fréchette *et al.*, St. Hyacinthe, P. Q. Boot shank pieces. June 4, 1875.
4,768.—L. J. Atwood, Waterbury, Conn., U. S. Fireside burner. June 4, 1875.
4,769.—G. M. Mowbray, North Adams, Mass, U. S. Mica blasting powder. June 4, 1875.
4,770.—J. Struthers, Alma, Ont. Snow plow. June 4, 1875.
4,771.—J. E. Waterous, Brantford, Ont. Steam condenser and feed water heater. June 4, 1875.
4,772.—T. E. Webber, Pittston, Me., U. S. Harness lug lining. June 4, 1875.
4,773.—C. D. Wilson, Elmwood, Ill., U. S. Picture frames. June 4, 1875.
4,774.—J. Nicholson, Jr., Pittsburgh, Pa., U. S. Glass furnace. June 4, 1875.
4,775.—Wm. Ascough, Buffalo, N. Y., U. S. Pontoon boat. June 4, 1875.
4,776.—T. J. Blake, Pittsburgh, Pa., U. S. Making shovels. June 4, 1875.
4,777.—O. B. Kendall, Buffalo, N. Y., U. S. Water regulator and indicator. June 4, 1875.
4,778.—P. B. Hennessy, Hamilton, Ont. Time lock. June 4, 1875.
4,779.—G. Henry, Lennoxville, P. Q. Boiler feed regulator. June 4, 1875.
4,780.—R. G. McLellan, Woodstock, Ont. Measure indicator. June 4, 1875.
4,781.—H. E. Susand, Berlin, Ont., *et al.* Saw mill dog. June 4, 1875.
4,782.—H. Hagen *et al.*, Toronto, Ont. Marble-veneered concrete. June 4, 1875.
4,783.—Wm. Schnabel, Orillia, Ont. Elastic wooden seat. June 4, 1875.
4,784.—A. G. Bayles, New York city, U. S. Gas burner. June 4, 1875.
4,785.—E. Draper, London, Ont. Musical instructor and game. June 4, 1875.
4,786.—Wm. M. Leyde, Newport, Minn., U. S., *et al.* Thrashing machine. June 4, 1875.
4,787.—Wm. P. Yeoman, Waukegan, Ill., U. S. Ear rings. June 4, 1875.
4,788.—L. M. Bissell, Addison, Ont. Sower shaker. June 4, 1875.
4,789.—L. J. Atwood, Waterbury, Conn., U. S. Lamp burner. June 4, 1875.
4,790.—D. A. McDonell, Charlottenburg, Ont. Bob sleigh. May 27, 1875.

© 1875 SCIENTIFIC AMERICAN, INC

The Best Paper! Try It!

The SCIENTIFIC AMERICAN is the cheapest and best illustrated weekly paper published. Every number contains from 10 to 15 original engravings of New Machinery, Novel Inventions, Bridges, Engineering works, Architecture, Improved Farm Implements, and every new discovery in Chemistry. The SCIENTIFIC AMERICAN has been published weekly for 30 years, and stands foremost of all industrial papers. A year's numbers contain 832 pages and several hundred engravings. Thousands of volumes are preserved for binding and reference. The practical recipes are well worth ten times the subscription price. Terms, $3.20 a year by mail, including postage. May be had of all News Dealers.

PATENTS.

Patents obtained on the best terms. Models of new inventions and sketches examined, and advice free. All patents are published in the SCIENTIFIC AMERICAN the week they issue. Send for Pamphlet, 110 pages, containing laws and full directions for obtaining Patents. Address

MUNN & CO.,
37 Park Row, New York.
[Branch Office, cor. F and 7th Streets, Washington, D. C.

SCIENCE RECORD.

Published about the Fifteenth of January, each year, by the publishers of the SCIENTIFIC AMERICAN, and contains a Compendium of the Progress and Discoveries of the Preceding Year.

Illustrated with Engravings, Six Hundred Pages Octavo Price $2.50.

The Volume for 1875 recently published. Its contents embrace the most Interesting Facts and Discoveries in the various Arts and Sciences that have transpired during the year 1874, exhibiting in one view the General Progress of the World. Price $2.50. The publication of this Annual was commenced in 1872. All the preceding volumes of SCIENCE RECORD may be had separately at $2 50 each, or $8 for the four volumes, 1872, 1873, 1874, and 1875. ☞ For Sale at all the principal Bookstores.

MUNN & CO., Publishers,
37 Park Row, New York City

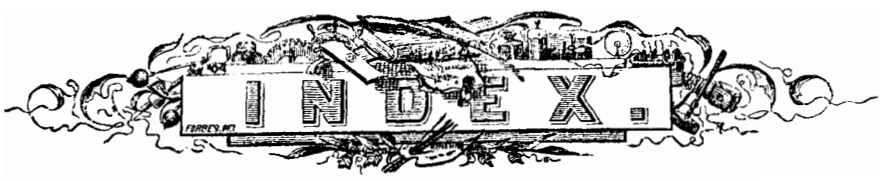

ILLUSTRATIONS.

A

Air pump, mercury, Marismas'... 258
Alexandra, the ironclad..... 387
Anatifa, the..... 259
Anti-primer, Stockley's..... 274
Aquarium and plant case..... 55
Awning, Stonehocker's..... 134
Axle box, Hussey's..... 166

B

Bale tie for wire bands, Albertsons' 150
Balloons, sounding, Sivel's..... 359
Balloon Zenith, the..... 359
Barrel head jointing and boring machine, Holmes'..... 79
Barrel heads, machine for dressing, Holmes'..... 79
Barrel heads, machine for turning, Holmes'..... 79
Barrel hoops, machine for bending, Holmes'..... 86
Barrel hoop, Weil's..... 390
Barrel leveling, trussing, and hooping machine, Holmes'..... 86
Batteries, galvanic, arrangement of..... 341
Battery, Meidinger's..... 312
Begonia, the cut-leaved..... 199
Belt-coupling, Kapp's..... 372
Bessemer saloon steamer, the controlling gear..... 50
Bessemer steamer, the oscillating saloon..... 70
Bessemer, the saloon steamer, 354, 355
Bill file, Hoffman's..... 374
Birds of Brazil, the 375
Birds, the flight of..... 292
Blind slat holder, Smiths'..... 342
Blower, applied to pneumatic despatch, Root's..... 223
Blower, rotary pressure, Baker's 47
Boiler, triple, Wolff's..... 367
Bolt cutter, Schlenker's..... 246
Bootjack, Baker's..... 99
Bottle, self-corking, Miller's..... 82
Bottle stopper, De Becker's..... 242
Bouquet, a button hole..... 343
Bourse, at Brussels, Belgium..... 135
Bridge at Lewiston, N. Y., proposed 111
Bridge, double lattice, at Springfield, Mass. 21
Bridges with long spans, Pierce's 235
Brush handle, Hood's..... 390
Bryanopsis laciniosa..... 343
Bucket ear, Field's..... 358
Bustards, South African..... 103
Button hole cutter, Wolff's..... 310

C

Car and carriage springs..... 280
Car axles and couplings..... 328
Car, chariot street, Murch's..... 31
Car, railway, Giffard's..... 242
Car seat, Wellman's..... 118
Cartridge belt, Hayden's..... 118
Cattle, Breton 151
Cattle, highland..... 71
Cattle, lowland..... 71
Cattleya trianæ, the..... 279
Chimney cowl, Tomlinson's..... 246
Clock at Strasbourg cathedral..... 331
Clothes dryer, Whipple's..... 275
Coffer dam, Walsh's..... 287
Color, the modern theory of, Morton on..... 264
Condensed water trap, Dehne's.. 383
Conservatory, curvilinear wooden, Lascelles'..... 295
Cook stove, gas, Giles'..... 3 7
Cotton gin feeder, Flynn's..... 383
Coupling, power, Varley and Furness'..... 390
Crane, the American..... 183
Crystallization, instantaneous.... 370
Cylinders, placing in line..... 52

D

Death's head moth, larva of the... 327
Deer, a family of red..... 215
Die tap, McFetbrie's..... 66
Dinner pail, Heinig's..... 246
Dish drainer, Abbe's..... 390
Distill ng water..... 91
Ditcher, Virginia, Randolph's.... 335
Docks, tubular floating, Clark and Standfield's..... 51
Dodo, the little..... 311
Draft tongue for reapers and mowers, Kready's..... 182

E

Earthquake indicator, Count Malvaria's..... 220
Electricity, the sources of 404
Electric lamp lighter, Voisin and Dronier's..... 275
Electrogilding bath..... 405
Elevator, Holske's..... 374
Engine, automatic, the Buckeye. 15
Epigynium leucobotrys, the..... 199

F

Feed water regulator, Bede's..... 339
Fence pickets, machine for making, Levy's..... 227
Ferry, channel, Leigh's 403
Filter presses for chemicals and sugar..... 66
Fireless railway system, Todd's.. 386
Fireproof dwellings, model..... 391
Fireproof house, plan for a..... 248
Fish, decoy, Huard and Dunbar's 226
Flamingo plant, the..... 167
Fluids, storing and handling..... 229
Flying machine, Blackford's..... 100
Force cup, elastic, Hawley's 329
Fronts for buildings, movable, Murphy's 278
Filling mill, Draper's..... 319

G

Garden at Carclew, England..... 375
Gas burner for heating, Ehret's.. 290
Gas carbureter, Venners & Judy's 38
Gas light at the Paris opera..... 388
Gas lighting, De Guinon's system of..... 351
Gear wheel cutting machine, the Chemnitz Co.'s..... 70
Germination, the physical phenomena of..... 57
Glass, toughening, Bastie's process for..... 402
Gold regions, the Black Hills..... 291
Governor and stop valve, combined, Lynde's..... 163
Grand Central depot, N. Y. city. 399
Grate bar, Toope's..... 102
Grayhounds, English..... 247
Grubbing machine and extractor, Reyner's..... 22
Gun sight, Harrington's..... 406
Gun, the British navy 38-tun..... 19

H

Hairy faced Burmese family, the.. 119
Hammer, tack, Ryer's..... 259
Hand cart, Jones'..... 406
Hatchway, automatic, Reid's.... 182
Heating with hot water, Cowan's system 290
Hoisting machine, Mundy's..... 228
Horse detacher, Ehret's..... 22
Horse, mechanical, Bret's..... 147
Hospital, the Morgan, Dundee, Scotland..... 18
Hub borer, Abbott's..... 242
Hydrant, Lehman's..... 358

I

Ice harvesting on the river Hudson 195
Impermeability of tissues, determining the..... 258
Injectors, attachment to, Lee's.. 323
Injectors, lifting and non-lifting, Friedmann's..... 214
Ironclad, a Chilian..... 131
Irrigation in Colorado..... 114

K

Key fastener, Eldridge's..... 360
Knife and pepper box, combined, Brown's..... 82
Knitting machine, upright, Tompkins'..... 38
Kagu, the Australian..... 247

L

Lamp, hydro-electric, and extinguisher, Zimmermann's..... 370
Lewis, disengaging, Matthews'.. 179
Life-preserving dress, Captain Boyton in Merriman's..... 338
Life-preserving mattress, Peck's. 150
Lighthouse at Karquines, Cal..... 39
Lighthouse at Piedras Blancas, Cal. 39
Light, Riche and Bardy's 178
Locking bolt, Tiffany's..... 275
Lock nut, Dittman's..... 258
Locomotive, road, Aveling and Porter's..... 5
Lounge, camp, Camp Lounge Co.'s 102
Low water indicator, Hopkins'.... 310
Lumber dogs, Beckwith's..... 258

M

Measuring building materials..... 194
Meat tenderer, the Desper Manufac uring Co.'s 294
Mines, lowering in shafts of..... 99
Mining dial, Davis and Son's..... 182
Mining, hillside, in Colorado..... 35
Molecular changes in metals..... 193
Motor, hydraulic, Schmid's..... 198
Motor, water, Backus'..... 115
Mountains, measuring, Colvin's plan of..... 115

N

New York river front improvements, the 307
Nile, vegetation of the white..... 23

O

Ocular illusion, a curious..... 274
Omnibus, three-wheeled..... 179
Ovals and circles, to draw..... 194
Overalls, Cheang Quan Wo's..... 261
Oysters, the cultivation of.....17, 33

P

Packing, combination, Fuller's.. 390
Palm, the male hardy..... 167
Palm tree, the strelitzia Nicolai... 399
Phylloxera, extermination of the. 242
Pie marker, Macomber's..... 134
Pipe joint, Valentine's 182
Planer, surface, Bentel & Co.'s.. 306
Planing and matching machine, Bentel & Co.'s..... 1
Plant cases, the Wardian 263
Porcelain manufacture in New York..... .....175, 191
Potato planter, Mewborne's..... 54
Press, cotton, belt-geared, Coleman's..... 358
Prsions, construction of, Mullett's 388
Pruning shears, Broadbooks'. ... 54
Pruning, the manipulation of.... 162
Psyche, the automaton..... 341
Puddler, rotary, Pernot's..... 82
Pump bucket, sectional, Burr's.. 290
Pump, plenum and vacuum, Cameron's..... 118
Pump, rotary, Bagley and Sewall's 278

R

Radiometer, Crookes'..... 392
Railway switches and signals, Saxby and Farmer's system..... 207
Railway tunnel and car elevator, Jersey city, N. J. 127
Railway, wire rope traction, Hallidie's..... 239
Rake, vine, Dunn's..... 406
Receiver, Florentine..... 331
Refrigerator, sideboard, Lesley's. 341
Refrigerator, underground..... 226
Respirator, fireman's, Tyndall's. 178
Rifle projectile, Macdonald's..... 212
Riveted structures..... 276
Road roller, steam, Aveling and Porter's..... 5
Roofing, sheet iron, Scott's..... 309
Runaway horses, checking..... 311

S

Sad iron, Rathbun and Shaw's..... 146
Sad iron, self-heating, Rand's.... 150
Sad iron, Snow's..... 118
Safety valve, equilibrium, Cockburn's..... 291
Sand grouse, the..... 407
Sardine fishery, the American.... 87
Sashes, device for laying out, Cook's..... 198
Saw, band, re-sawing, First and Prybil's 134
Saw, chisel tooth, Hoe's..... 322
Saw gummer, Noyes' 371
Saw table, circular, Haven's..... 230
Scorpion fly, metamorphoses of the 327
Screw, a variable..... 177
Screw pine of the Amazons, the.. 293
Screw threads, cutting with a hand chaser..... 143
Secretary bird, the..... 263
Sewers, London, cross sections of 130
Shade attachment for plows, Darby's..... 22
Sharpening instrument, Radial Steel Co.'s..... 358
Shears, iron-cutting, Stevens'.... 303
Sheave, Smith's..... 342
Sheep shearing support, Smith's.. 360
Shingle and barrel head sawing machine, Low's..... 271
Shingle machine handfeed, Evarts' 271
Shingle machine, rotary, Evarts' 271
Shingle machine, White's..... 262
Shot pouch sling, Kollock's..... 1
Silkworm, diseases of the 370
Skein setting machine, Union Foundery Works'..... 326
Slaughtering cattle, new mode of 242
Snow flake, new revelations of a. 178
Solanum crinitum, the..... 279
Spawn-carrying device, Green's.. 131
Spectroscopic analysis, Lockyer's 226
Sphere, problem relating to the.. 81
Spoke-planing machine, the Chemnitz Co.'s..... 34
Sponges, fossil..... 387
Spooler, yarn, Tompkins'..... 327
Steam launch, the Mab..... 179
Steam, removing condensed, apparatus for..... 306
Steam sentinel, Smith's..... 406
Steam trap, automatic, Jenkins'.. 163
Steam winch and pump, portable. 19
Stellar indicator..... 226
Stenographic machine..... 387
Stone-sawing machine, Young's.. 63
Stove, cooking, Chinese..... 20
Stove damper, Stewart's..... 323
Sugar-refining tank, Schrader's.. 194
Summer house, design for a, Fox's 295
Sun, the, at different seasons of the year..... 259
Surveyor's instrument, Naylor's. 388
Swim, boys learning to 407
Swimming bath, St. Marylebone, London.....

T

Table, work, Snyder's..... 146
Tanning apparatus, Reed's..... 262
Taxidermical implements..... 159
Taxidermist at work, the..... 159
Telegraphy, ocean..... .....24, 40
Temperature of ignition of charcoal..... 3
Thermometer, registering..... 402
Tides, the cause of the..... 325
Tie, railway, Blaisdell's..... 54
Torpedoes, spar and other..... 371
Trap, animal, Dildine's..... 162
Tree protector, Hitchcock's..... 194
Tulip tree, the..... 83
Tunnel, British Channel, Wenmaekers'..... 243
Tunnel under the Hudson River, New York city, Haskin's proposed.....210, 211
Turpentine tool, Watson's..... 323
Tyre press, hydraulic..... 367

U

Underground railway, New York city.—Elevation of viaduct at street crossings..... 67
Underground railway, New York city.—Station at 125th street.. 98
Underground railway, New York city.—Station at 86th street.... 98
Underground railway, New York city.—The great arch..... 4
Underground railway, New York city.—The rock tunnels..... 4
Underground railway, New York city.—Viaduct and station at 110th street..... 67

V

Valve motion, engine, Brandon and Trankle's..... 322

W

Walk and road cleaner, McKinley's 338
Washing machine, Taylor's..... 310
Water wheel governor, Walsh's.. 294
Waves, hight of..... 339
Waves, motive power from..... 339
Well at Prospect Park, Brooklyn.. 23
Wheel-finishing machine, Webb's 6
Wheels, car..... 360
Whiffletree hook, Smith's..... 274
Windmill, how to build a..... 241
Windmill, Smith's..... 230
Wood worker, the Excelsior Universal, Bentel & Co.'s..... 93
Wool-washing machine, McNaught's..... 6
Wrench and bolt cutter, combined, Broadbooks'..... 9

MISCELLANY.

Figures preceded by a *star* (*) refer to illustrated articles.

A

Acids, fatty..... 182
Acoustics in public buildings..(26) 11
Agassiz monument, the..... 33
Agricultural work for March..... 194
Air compressors, St. Gothard tunnel 179
Air currents and air floats..... 148
Air expanded by heating.....(2) 138
Air for respiration.....(15) 202
Air in water .....(29) 409
Air pump, mercury..... 258
Alcohol by synthesis.....(27) 282
Alcohol, the action of..... 32
Alexandra, the..... *387
Alignments, accurate..... 112
Alkali, testing..... (14) 10
Alloys of platinum and iron..... 344
Almonds in California..... 56
Aluminum, extracting.....(49) 91
Aluminum utensils..... 116
American Institute, metaline at the 112
American Institute, rotary engine tests at the..... 148
American inventions abroad..... 151
Americans, weight and hight of.. 98
Anatifa, the..... *259
Aniline colors without arsenic.... 167
Animals, the voices of..... 117
Animaltrap..... *162
Animal wonders..... 230
Answers to correspondents. 10, 26, 43, 59, 74, 90*, 106, 123, 138, 154*, 170, 18 *, 202, 218, 252, 2 7, 282*, 298*, 314, 330, 347, 362, 378, 395, 409
Anti-primer *274
Ants..... 149
Ants and plants, partnerships of.. 192
Ants, can they talk..... 97, 165
Ants, remedy for..... 319
Ants, white, at St. Helena..... 373
Apparatine 279
Apple gases..... 281
Apples, half sweet, half sour..... 31
Apples, storing..... 121
Aquarium and plant case..... * 55
Arctic amusements..... 373
Arctic expedition, British..... 359
Arctic expedition, sailing of the new 335
Arctic expeditions, the coming... 320
Arctic notes..... 373
Arctic temperature..... 373
Argand burner, the..... ....(32) 11
Arsenic in copper mines..... 147
Asteroid, a new..... 7
Astronomical discoveries in 1874.. 53
Astronomical discoveries, recent. 324
Astronomical notes..8, 88, 165, 229, 296, 356
Astronomical observation, refinements in..... 334
Attachment, an unhappy..... 34
Axle box, improved..... *166
Axles, hollow bolts and..... 117
Awning, improved..... *134

B

Bacteria and putrefaction..... 193
Bacteria, what are..... 145
Baker's expedition to the Nile, Sir Samuel ..... * 23
Baking powder, ammonia....(22) 123
Bale tie, wire..... *150
Balloon ascent, a fatal..... 290
Balloon ascent, the fatal..... *359
Ballooning, deadly..... 321
Ballooning experiments..... 343
Balloons, something about..... 64
Barrel hoop..... *390
Barrel machinery, new..... *79, *86
Batteries, arrangement of..... *341
Battery, a cheap.....(61) 1 7
Battery, a cheap Daniell..... 326
Battery, a cheap galvanic..... 132
Battery, a new galvanic..... 65
Battery carbons, cutting..... 247
Battery contacts, faults in..... 321
Battery for plating.....(3) 26
Battery, the Callaud....(4) 27, (10) 314
Battery, the galvanic..... 323
Battery, the Grenet.....(46) 219
Battery, the Meidinger..... *312
Battery, the Minotti.... .....(4) 26
Battery, the Stevens..... 1
Battery zincs, amalgamating..... 323
Beaver, giant..... 39
Bedbugs, a use for 404
Bee-keeping in 1875..... 152
Beet cider..... 211
Begonia, the cut-leaved..... *199
Belts and crowned pulleys....(41) 27
Belts, coupling machine..... 372
Belts, joining..... 57
Belts, machine..... 120
Belts, mending machine..... 20
Belts, splicing large..... 52
Benzine scouring, dangers of .. 18
Bequest, a noble..... 5
Bergen hill engineering works....*127
Bessemer channel steamer, the... *351, 355
Bessemer oscillating saloon, the.. * 50
Bessemer saloon steamship, the.. * 70
Bessemer steamer, another trial of the..... 225
Bill file, improved..... *374
Birds, green food for..... 306
Birds of Brazil, the..... *375
Birds, remarkable..... *103
Birth rate, a diminished..... 128
Blast furnace economy..... 166
Bleaching powder .....(54) 91
Bleaching with brimstone.....(35) 11
Blind slat holder,..... *342
Blower, rotary pressure..... * 47
Blowpipe, oxyhydrogen.....*(75) 283
Blue lacquer on tin.....(47) 75
Blue, soluble laundry.....(29) 75
Blowpipe, heat by.....(6) 10
Blue, washing..... 261
Bleaching cotton goods.....(26) 282
Boiler, compound steam..... *367
Boiler explosion, singular cause of a..... 4
Boiler explosions, steam.... ... 36, 100
Boiler feed regulator..... *339
Boilers and engines, management of..... 305
Boilers, an engineer on..... ... 376
Boilers, feeding marine..... 406
Boilers, inspection of..... 209
Boilers, sea water in..... 34
Boilers with copper, lining..... 392
Boilers, zinc in..... 36
Boils and carbuncles..... 19
Bolt cutter, improved..... *246
Bolting reels..... 117
Bone, transplantation of..... 337
Booklost, a valuable..... 34
Book-making, new style needed.. 145
Bootjack, improved..... * 99
Boracic acid..... 181
Borax, a new source of 294
Borax as a poison..... 211
Bottle, a self-corking..... * 82
Boundary of experimental evidence, crossing the..... ... 176
Bouquet, a button hole..... *343
Bourse at Brussels, new..... *135
Brachiospongia..... *387
Brain, chemical constitution of the..... 128, 227
Brains..... 56
Brains, small..... 219
Brain, the, not the sole organ of mind 328
Brass and phosphor bronze in rolling mills..... 100
Brass, scrap..... 66
Brass, to clean..... 54
Bread, fermenting with soda.(30) 410
Bridge at Lewiston, N. Y..... *111
Bridge at Springfield, Mass..... * 21
Bridge between New York and Brooklyn 384
Bridge construction, improved...*255
Bridge, the East river..... 7
Bridge, the Royal Albert..... 200
Bridging the Niagara river..... 36
Bright's disease, a cure for..... 35
Britannia metal .....(1) 106
Broiler, the odorless 406
Bronzes incrustés..... 229
Bronzing cast iron..... 231
Brush handle, adjustable..... *360
Bucket ear..... *358
Burial, new mode of 290
Burning under pressure..... 214
Business, a novel..... 47
Butter, artificial, the latest process 23
Butter manufacture, the suet..... 340
Butter, salting, packing, selling.. 215
Butter salting test, a..... 81
Button hole cutter..... *310

C

Cam, drawing a heart..... *(56) 283
Camera obscura, railroad..... 214
Camphor..... .....(1) 26
Candy and the teeth..... 244
Canal in Africa..... 319
Canal in Rome, proposed..... 225
Canal navigation, improvement in 49
Canals, steam on the..... 323
Canals, steam on the Belgian..... 3
Canals, the New York..... 195
Canal, the Suez..... 261
Cancer, silica in..... 82
Candles, coloring..... 292
Caoutchouc, vulcanizing..... 374
Capitol at Albany, new..... 42
Car axles and couplings..... * 328
Car bell punches 69
Carbolic acid for hides..... 82
Carbon, crystalization of..... 68
Carbonic acid, liquefied.....(48) 91
Carbons, battery..... .....(49) 187
Carbureter, new gas..... 38
Car, chariot street..... * 31
Car seat..... * 118
Cartridge belt, revolving..... * 118
Car wheel fitting..... 55
Car wheels..... .....55, *360
Car wheels, doubtful..... 56
Car wheels, mileage of..... 56
Catarrh, cure for..... 85
Cattle, highland and lowland....* 71
Cattle, the Breton..... * 151
Celery, the propagation of..... 353
Cement for amber.....(3) 123
Cement for boiler patches.....(29) 331
Cement for broken glass.....(63) 379
Cement for chemical apparatus... 373
Cement for gas bags.....(14) 395
Cement for marble and alabaster. 344
Cement for millstones.....(10) 123
Cement, hard..... 388
Cementing cloth to paper.....(17) 43
Cementing metal to glass..... 117
Cement, Portland..... 199
Centennial, English agricultural machinery at the..... 319
Centennial exhibition for 1876, the 356
Centennial exhibition, the.....7, 338
Centennial exposition, France and t e 357
Centennial, foreign exhibitors at the..... 176
Centennial, Great Britain at the.. 260
Centennial, Siam at the..... 385
Centennial, the, agricultural display at the..... 304
Centrifugal force.....(16) 267
Chalk in artificial fuels..... 83
Charcoal, temperature of ignition of..... * 2
Chemical nomenclature..... 36
Children and dogs..... 129
Chimney cowl, improved..... * 246
Chimneys, burning..... 100
Chimney, straightening a tall..... 383
Chimney, the tallest in the world 311
China ware, Kentucky..... 151
Chlorate of potash.....(15) 105
Chloride of lime.....(54) 91
Chloride of lime, odor of..... 181
Chloroform, a bear under..... 226
Chromo-lithographic process..... 245
Cimex lectularius..... 289
Cincinnati exposition, the coming 337
Cisterns, brick.....(1) 10
Cisterns, cement.....(16) 314
Civilization by upheaval..... 384
Clock, the great Strasbourg..... * 331
Clothes dryer..... * 275
Clothes, protective power of..... 70
Clothing, arctic..... 373
Coal, anthracite..... 99
Coal, burning slack...(70) 76, (53) 107
Coal burns, how a piece of..... 225
Coal, the Middle Park..... 131
Coal vein, mammoth anthracite.. 31
Cocoa butter in scarlet fever..... 71
Coffee, making..... 38
Coffer dam, improved..... * 287
Coin, the new twenty cent..... 341
Cold, rather..... 173
Cold snaps, the origin of..... 345
Collision in mid-air, a..... 131
Collodion..... 322
Colored fires.....(65) 235
Colored glasses, seeing through.. 3
Color, the modern theory of..... * 264
Combustion..... 120
Comet, Encke's..... 121
Concrete foundations, new form of..... 279
Condensed water trap..... * 383
Condenser, surface of a.....(6) 395
Confectionery, colored..... 260
Conservatory, design for a..... * 295
Consumption 406
Cooking by gas..... * 387
Cooking stoves, Chinese..... * 20
Copper, a large mass of..... 344
Copperas, to make.....(39) 75
Copper, brass, and vermilion..... 83
Copper, coating castings with (16) 154
Copper, sulphate of..... 181
Copper, tempering.....(6) 123
Corona, the sun's..... 25
Corundum wheel, to true a..... 56
Cotton gin feeder..... * 383
Cotton manufacturing in the South..... 196
Cotton press, belt-geared..... * 358
Cotton sampling by hand..... 181
Coughing..... 273
Couplings, power..... 390
Crane, the..... * 183
Crank, the..... * 164
Cribbing in horses..... 20
Crime, hereditary..... 18
Criminal entailment, the chain of 288
Crocodile study, importance of... 383
Crucibles.....(6) 330
Crystallization, instantaneous... * 370
Curve, the tractrix.....(28) 59
Cylinders in line, placing..... * 52

D

Dampness in walls.....(25) 75
Day, the solar .....(20) 395
Death, indication of..... 340
Death's head moth, the..... * 327
Death, the hour of..... 85
Debts of the world..... 181
Deer, red..... 215
Dental surgery, new process of... 310
Dentistry, eclectic..... 151
Depilatory..... .....(12) 362
Design patents and trade marks.. 357
Device, an ingenious..... 180
Devils, Tasmanian 408
Diamond, flaws in the..... 145
Diamond glass cutting..... 200
Diatoms, motive power of..... 134
Die tap, improved..... * 66
Dinner pail..... * 246
Diphtheria..... 103
Diphtheria, a cure for..... 68
Diphtheria, lemon juice in..... 115
Discipline, value of..... 81
Discoveries 405
Diseases, dogs, and books..... 85
Diseases, preventible..... 311
Dish drainer..... * 390
Distilling water..... *(48) 91
Ditcher, the Virginia..... * 335
Diving bell, the..... 83
Docks, tubular floating..... * 51
Dodo, the little ..... * 311
Dog, lumber..... * 258
Draft tongue for reapers and mowers..... * 182
Drainage, house..... 163
Dredging, a new system of 213
Drill, diamond, in dentistry..... 145
Drills, forging..... * 277
Dry rot in lemon trees..... 306
Dyeing feathers.....(20) 11
Dyeing hair brown.....(14) 43
Dyeing wood red.....(17) 154
Dyeing wool black.....(40) 75
Dyeing wool blue .. ....(31) 155, 216

E

Ear, cleansing the..... 230
Earthquake indicator, an..... *226
Earthquake indicator, another... 257
Earthquake in South America..... 401
Earthquake investigations..... 290
Earthquakes and volcanoes, cause of..... 35
Earth's crust, organic origin of the 352
Earth, temperature of the..... .. 246
Earth, the, its heat and contraction 168
Ebullition, curiosities of..... 343
Eclipses of 1875, the 181
Education, the money value of... 272
Eggs, new way of preserving..... 49
Electrical colored shadows..... 310
Electrical condenser.....(51) 331
Electrical condition of the air.... 200
Electrical conductor, the best.... 114
Electrical resistance of metals.... 134
Electric clock.....(2) 26
Electric earth batteries..... 64
Electricity at the Paris opera..... 340
Electricity, beef steak..... 168
Electricity, recording votes by... 166
Electricity, the sources of..... *404
Electric lathe chuck..... 213
Electric light in Paris, the..... 260
Electric light, the..... 227, 373
Electric machines, Gramme's..... 85
Electric spark, flame and the..... 65
Electric telegraph, the..... 180
Electric torpedo cables..... 341
Electrogilding. *405
Electromagnet, coil..... (27) 409
Electromagnetic motor, new..... * 38
Electro-metallurgy..... *405
Electroplating 405
Electroplating iron surfaces..... 84
Electroplating on china..... 65
Electroplating on flowers..... 280
Electroplating with bronze...(14) 202
Electroplating with gold..... (3) 282
Electrotyping..... 405
Elevator accident, an..... 177
Elevator, improved. *374
Elevator, new safety 165
Enamel, hard..... .....(6) 218
Enameling iron vessels (13) 123, (4) 362
Enameling process, a new..... 183
Enamel on iron, imitating..... 306
Engine driver, the English..... 146
Engines, compounding marine... 243
Engines, miniature steam..... 393
Engines, small steam..... 52, 132, 196
Engine, steam, the Buckeye..... * 15

© 1875 SCIENTIFIC AMERICAN, INC

Engine valve motion.....*322
Engraving on copper, new process of.....239
Errors of observation, the theory of.....18
Etching on glass.....(44) 379
Etching on stone.....(60) 75
Ether.....(7) 26
Ether, methylic.....(41) 91
Ether pressure, physical forces are modes of.....16
Ether, the, is it matter.....16
Evergreens in orchards.....68
Excavations, danger from.....20
Exhibition at Manchester, England 199
Exhibition at Paris, France, 1875. 229
Explosions, nature of (37, 38, 39).. 215
Explosive, a new.....81
Explosive substances, researches on.....245

F

Falling bodies, force of.....(13) 90
Fat, a new.....249
Female voters.....243
Fence pickets, machine for making.....*227
Ferry system, a gigantic.....*403
Fever case, a.....196
Fibers, vegetable, at Vienna exposition.....57, 72
Files, to clean.....86
Filling for canvas.....(44) 75
Filling for fireproof safes.....(54) 75
Filter, charcoal.....(18) 395
Filtration, purifying metals by.... 356
Filtration under pressure.....* 66
Finish for walls, hard.....(19) 395
Finny musicians.....102
Fire arms, facts about.....181
Fire at Port au Prince.....149
Fireless locomotives.....372
Fireless railway system in England.....*386
Fire, mysterious.....82
Fire, precautions in case of.....57
Fireproof house, prize plan for...*248
Fire, protection from.....198
Fires, London.....341
Fires on shipboard, extinguishing 228
Fish, a novel decoy.....*226
Fish as makers of oxygen.....5
Fish, curious artificial.....134
Fishery commission, a success for the.....337
Fishes, Mammoth Cave.....149
Fish in a cistern.....305
Fishing, comfortable.....182
Flies, parasites in the tongues of. 260
Flies, the plague of.....260
Flight, aerial.....196
Flight of birds, the.....*292
Florentine receiver, the.....*331
Flowers, ashes and iron for.....344
Flying machine.....*100
Flying machines.....112
Flying machine, the.....20
Fly, the mission of the.....209
Fly wheel, formula for.....(45) 251
Fluids, the storage and handling of.....*229
Fluorescence in castor oil.....243
Fog.....343
Fog gun, the.....68
Fog, observations in a.....388
Forest culture and waste land.....161
France, the example of.....80
Freckles, removing.....(42) 187
Free lunch suspended.....229, 244
Freezing by mechanical force (18) 298
Freezing mixture.....(4) 330
Freezing of water bottles.....373
Friends, to our.....80
Fronts for buildings, movable...*278
Frozen water mains.....196
Fulling mill, improved.....*319
Furnace for melting brass, etc. (45) 235
Fusible metal.....(25) 347

G

Gages, cylindrical standard.....*150
Gages of guns and shot.....(55) 383
Galvanic cell, the coke-manganese 376
Galvanism, its action on the throat 81
Gardens, English.....*375
Gas burner, a self-lighting.....364
Gas burner for heating purposes.*290
Gas dangers.....88
Gas, enterprise, a water.....200
Gases, expansion by heat.....(22) 170
Gas from crude petroleum.....65
Gas from sewer refuse.....5
Gas from vegetable matter.....133
Gas light at the Paris opera.....388
Gas lighting, new system of.....*351
Gas light regulator, railway.....290
Gear wheel cutting machine.....* 79
Genius *vs.* capital.....389
Gelatin, coloring.....(34) 11
Geographical elevations, American.....293
Geographical progress in 1874.....181
Germany, the industrial condition of.....224
Germination, the physical phenomena of.....* 57
Get along, how to.....265
Get up, when to.....118
Gilding by amalgam.....130
Gilding on glass.....241
Gilt frames, washable.....117
Glacial era, epoch of the.....216
Glass, coloring.....(20) 43
Glass for chemical analysis.....130
Glass, hardening.....376
Glass stoppers, to remove tight..194
Glass, the Bastie patent.....401
Glass, the Bastie toughened.....*402
Glass, the durability of.....353
Glass, tough.....375
Glass, toughened.....208
Glass, window, making.....(22) 43
Glue.....8
Glue, liquid.....(5) 90
Glue, marine.....304, (7) 347
Glue, rice.....(55) 155
Glues and cements.....213
Glycerin as an illuminating material.....359
Glycerin, new property of.....278
Gold and silver for photography (32) 410
Gold and silver plating.....(26) 248
Gold fields, new.....*291
Gold, imitation.....65
Gold lace, cleaning.....(53) 91
Gourd, ornamental.....*343
Governor and stop valve, combined.....*163
Governor, water wheel.....*294
Grammar in rhyme.....68
Grasshopper inventions wanted..369
Grasshoppers, prairie chickens and 257
Grasshopper, the.....*244
Grate bar, improved.....*102
Gravel walks, concrete.....50
Graver, the.....*325
Gravity at a distance.....(6) 409
Grayhounds, English.....*247
Great Eastern as an hotel, the....33
Greenhouses, fumigating.....180
Grinding tools.....194
Grit wanted.....52
Grouse family, the.....*407
Grubbing machine.....* 22
Gun cotton.....(44) 11
Gunpowder.....(34) 75
Gunpowder, a strong.....132
Gunpowder, cotton.....183
Guns, British naval.....* 19
Guns, great.....352
Gun sight, improved.....*406
Gutta percha, dissolving.....(16) 395

H

Hair, blonde.....197
Hairy faced family, a.....*119
Hammer, a million dollar.....342
Hammer, a new tack.....*259
Hand as an optical instrument, the 309
Hand cart.....*406
Hand turning.....*277
Hand turning—brass work.....*389
Hat chway, automatic.....*182
Heads, boys' idea of.....106
Heating buildings with hot water*290
Heat, momentum of.....183
Heel tool, the.....*325
Heliograph, the.....308
Heteroplasty, a new discovery....128
Hippophagy in France.....65
Hobby, having a.....216
Hoisting machine, improved.....227
Hollow structures.....244
Homes of the working classes, the*391
Honey, experiments with.....132, 212
Horse, a machine.....*117
Horseback, railway speed on.....399
Horse clipping.....85
Horse detacher.....* 22
Horse flesh as food in France.....129
Horses, preventing runaway.....*311
Horse, the iron.....369
Horticulture, cottage.....343
Hospital, the Morgan, Dundee, Scotland.....* 18
House, a tough old.....214
House, doing up one's.....261
Household hints.....372, 393
Houses, dangerous.....320
Hub borer.....*342
Hydrant, improved.....*358
Hydrants, etc., frozen.....192
Hydrogen above our atmosphere. 98
Hydrogen by palladium, occlusion of.....388
Hydrogen in metals, dissolution. 360
Hydrogen, making.....(41) 75
Hygrometer, the.....(8) 409
Hudson river sources, utilizing the 3

I

Ice, 14,000 miles of.....115
Ice age, climate of the.....369
Ice, a railroad on.....132
Ice cellar.....(44) 187
Ice, compressed.....263
Ice, drifting of.....262
Ice, gathering and storing.....*195
Ice slide, a great.....130
Ice, to keep, without an icehouse 214
Ice water as a heater.....373
Impermeability of tissues, testing the.....*253
Indigo, extract of.....135
Indigo, sulphate of.....(5) 314
Induction coil.....(43) 219
Injectors, attachment to.....*. 23
Injectors, water.....*214
Injuries to employees.....372
Ink for ruling.....(45) 155
Ink, ruling.....(50) 91
Ink, removing indelible.....(2) 409
Inks, aniline.....257
Ink spots, removing.....(33) 410
Insect æsthetics.....395
Insects, to discover.....343
Intellect, the, in consumption and gout.....165
Intoxication, phenomena of..(57) 155
Inventions, how made.....407
Inventions made, by whom are..116
Inventions patented in England by Americans.....8, 58, 72, 122, 216, 332, 281, 313, 393
Invention wanted, an.....308, 340
Inventors, an appeal to.....197
Inventors, the genesis of.....304
Iodine, carbolate of.....(47) 155
Iridium, the metallurgy of.....177
Iron and steel.....166
Iron and steel, hydrocarbons on. 22
Iron and Steel Institute, new members of the British.....361
Iron, burning.....345
Iron rails, British.....291
Iron surfaces, the protection of.. 34
Irrigation in Colorado.....*114
Ivory, bleaching.....(19) 10

J

Journals, pressure on.....121

K

Kagu, the.....*247
Kalsomining.....227
Kaolin in the United States...212, 257, 260
Key fastener.....360
Keys, making.....373
Kerosene oil, deodorizing.....(32) 378
Kiss the baby, don't.....2
Knife and pepper box, combined.* 82
Knife remedy, the.....128
Knitting machine, rotary.....* 38

L

Labor troubles in Russia.....129
Lacquer for instruments.....326
Lacquer, gold.....(41) 139
Lakes in the West, high.....117
Lamp and extinguisher, new.....*370
Lampblack, making.....10
Lamp for blowpipe use.....(37) 139
Lamp lighter, electric.....*275
Lamps, wicks for kerosene.....98
Land drains.....385
Land, waste, and forest culture..161
Language, a universal.....82
Launch, a steam.....*179
Launches for yachts, steam.....359
Launch, novel steam.....327
Lawn, a good.....118
Lawyer, honors to a.....213
Lean, how to grow.....88
Leather, kangaroo.....245
Leaves for artificial flowers...(40) 379
Lenses, testing and mounting....37
Letter, a prisoner's.....180
Lewis, improved.....*179
Licenses for pleasure boats.....228
Lick donations, the.....246
Lieberkuhn, the.....(8) 10
Lifeboat, a new.....345
Life, loss of, at sea.....228
Life preserver, 24 hours in a.....390
Life-preserving dress, Captain Boyton and the.....*338
Life-preserving dress, new.....179
Life-preserving mattress.....*150
Life-preserving pillow, a.....402
Life-saving dress in England, the 275
Life, the antiquity of.....320
Life, the duration of.....259
Light, a brilliant.....130
Light, actinic.....133
Light, a new.....86, *178
Light for photography, artificial. 294
Lighthouses in the United States.* 39
Lightning.....386
Lightning arresters.....(5) 283
Lightning, figures printed by.....383
Lightning rod man, the.....323
Lightning, struck by.....309
Light, parliamentary signal.....340
Light, the lime.....(16) 218
Light, the magnesium.....(16) 218
Light, the mechanical force of... 383
Light, the motive force of.....403
Light, the oxy-sulphur.....211
Light, velocity of.....376
Linseed oil, adulteration of.....385
Lipoma, a large.....104
Living too fast.....47
Lizard, the tock-tay.....199
Locking bolt.....*275
Locking nut.....*258
Lockjaw, cure for.....152
Locomotive, a good.....296
Locomotives, German.....178
Locomotives, road and farm.....* 5
Locomotives, self-watering.....245
Locomotive valves, setting.....212
Lounge, camp.....*102
Lumber accident, a.....56

M

Magnet, a large.....146
Magnet, curious.....326
Magnetic railway rails.....136
Magnetism and the aurora.....262
Magnetism, a new source of.....385
Magnetization.....246
Magnetization of steel.....279
Magnetization, temperature and..182
Magnets, armatures to.....198
Magnets, electrolytic preparation of.....53
Magnets for electro-motors.....385
Magnet, the steam.....405
Magnets on spectra, action of.....1
Mail, loss of a large.....49
Manganese.....(51) 91
Massachusetts, ignorance in.....81
Massachusetts, the mineral treasures of.....83
Mastic for iron, etc.....407
Mastodon for Yale College.....407
Mathematical fact, singular...98, 132
Measuring building materials.....*194
Measuring surfaces, new method of.....52
Measuring timber.....(38) 331
Meat, how to keep fresh.....385
Meat tenderer.....*294
Meat, the preservation of smoked 82
Mediterranean, excursion to the. 274
Mediterranean, fauna of the.....290
Meerschaum.....(28) 11
Meridian, finding the.....199, *292
Metal deadening.....306
Metals, molecular changes in.....*193
Meteoric stone, fall of a.....161
Meter, the French.....* 39
Metric commission, report of the 319
Metric system, an ancient.....97
Mica, dissolving.....(41) 75
Micro-lantern, the.....184
Microscope, a match under the... 132
Microscopical Society, Royal, an evening at.....114
Microscope slides, finishing.....101
Microscopic telescope, new.....137
Milk, chemistry of.....215
Milk, poisonous.....151
Mill dams.....132
Mill river disaster, the second.... 52
Mind, absence of.....405
Mind and health.....255
Miners in shafts, lowering.....* 99
Miners, the comfort of.....166
Mines, the Newburyport.....166
Mining dial.....*182
Mining Engineers, Institute of... 166
Mining in Colorado, hillside.....* 35
Mining in Massachusetts.....54
Mississippi delta improvement, the.....290
Mississippi, the mouth of the.....273
Models by mail.....182, 192, 229
Molding composition.....321
Moles, cure for.....(25) 347
Monads.....20
Mosquito, use of the.....326
Motion on a moving body.....273
Motor deception, the Keely.....400
Motor, hydraulic.....*198
Mountains, measuring.....*115
Mountains, the Catskill.....319
Multiplication and division.....41
Music, electro.....31
Music printing, improvement in.. 374

N

Nævus, the skin disease.....(61) 235
Natural history in the schools.....198
Nature's efforts.....161
Naval efficiency, our.....32
Neogene.....213
Nerve force, nature of.....72
New books and publications....8, 58, 72, 121, 152, 168, 200, 248, 281, 312, 408
New York river front improvements.....*307
Nickel-plated screws.....50
Nickel-plating.....405
Nickel-plating solution.....(25) 123
Nile, foundation of the.....35
Nitro-glycerin.....241
Nitro-glycerin as a motor.....47, 148
Nitro-glycerin, explosive properties of.....310
Noise as a nuisance.....295
Notes from Washington, D. C....148
Numerical system, a new.....340

O

OBITUARY:
Gray, J. E.....2 5
Gurney, Sir Goldsworthy....261
Hardwicke, R.....389
Harper, J.....290
Highton, Henry.....107
Hodges, S. L.....296, 346
Lyell, Sir Charles.....160
Mead, S. H., Jr.....404
Ward, E. B.....48
Wells, S. R.....80
Observation, the habit of.....147
Octagon, drawing an.....*282
Ocular illusion, curious.....*274
Oil, cotton seed, refining.....(29) 11
Oiled floors, scrapings from.....18
Oil for oilstones.....85
Oil fuels.....231
Oils, mineral, new use for.....115
Oils, purifying.....(20) 409
Old thoughts, reproduction of.....86
Omnibus, a three-wheeled.....*179
Optical phenomena, remarkable.. 83
Orchids, growing.....*279
Ordnance experiments, Sandy Hook.....5
Ormolu dip.....(37) 75
Ourselves, as others see us.....81
Ovals and circles, to draw.....*194
Ovals, drawing.....*(1) 282
Overworked man of business.....5
Oxygen, making.....(43) 75
Oxygen, obtaining.....107
Oysters, the cultivation of....*17, * 32
Ozone, production of.....216

P

Packing, combination.....*390
Paint.....356
Paint for shingle roofs.....247
Palms of the Amazons, the.....*292
Palm tree, a beautiful.....*399
Paper as a plant protector.....214
Paper barrels and boxes.....344
Paper clothing, Japanese.....53
Paper, newly in.....211
Paper, sensitive.....(17) 202
Paradox, mechanical.....*(44) 155
Parasites in wasp stings.....388
Paris green poisoning.....21
Partridge, sagacity of the.....114
Paste.....(44) 139
Patent bill, new British.....308
Patent business, a novel.....47
PATENT DECISIONS OF THE COURTS:
Brush.....200
Bung.....296
Car wheel.....345
Cultivator.....168
Egg beater.....8
Filter, feed water.....408
Fluting machine.....42
Glass cutter.....185
Glue.....58
Harness trimming.....312
Lathe.....232
Lock.....252
Locomotive truck.....72
Looking glass.....9
Loom.....408
Lubricator.....248
Miter machine.....8
Oven.....72
Paper box.....42
Paper collar.....185, 345
Patents, surrender of.....266
Rubber dental plate.....104
Rubber tip.....168
Seed planter.....232
Tremolo, organ.....393
Patentee, a Chinese.....*261
Patent, how to rush one through. 129
Patent law amendments.....96
Patent law, German.....240
Patent laws, changes in the British.....256
Patent litigation in England and the United States.....321
Patent litigation, new form of... 401
Patent, not the best way to sell a. 113
Patent Office changes.....96
Patent Office decision, important 129
Patent Office decisions...121, 137, 152
Patent Office, new rule of the.... 160
Patent Office tea set, the.....17, 20
Patent politics in Ohio.....384
Patent rights.....373
Patent rights and State laws.....112
Patents and patent laws.....84
Patents, Canadian.....308
Patents, official list of..11, 28, 44, 60, 76, 92, 107, 124, 140, 156, 172, 188, 204, 220, 252, 267, 284, 299, 315, 332, 348, 364, 380, 396, 410
Patents, official list of Canadian.. 12, 28, 44, 60, 76, 92, 108, 124, 140, 156, 172, 188, 204, 221, 252, 268, 284, 300, 316, 332, 348, 364, 380, 396, 410
Patent solicitors, a new dodge.....241
Patents, printing the.....33
Patents, recent American and foreign....9, 25, 42, 58, 72, 89, 105, 122, 137, 152, 169, 185, 200, 216, 233, 249, 266, 281, 296, 313, *329, 346, 361, 376, 393, 408
Patents, report of the Commissioner of.....144
Patents, the Commissioner's annual report.....129
Patent, the Woodbury.....16
Pavements, street.....247
Paving, new asphalt.....339
Penikese, an inland.....288
Penikese school.....374
Pen maker, the great.....247
Perdition, everlasting.....279
Petroleum.....(43) 139
Petroleum in Algiers.....213
Petroleum oil.....354
Pharaoh's serpents.....(34) 315
Phosphide of lime.....(13) 282
Phosphor bronze.....36, 180
Phosphor bronze in rolling mills.. 100
Phosphorus crystals.....353
Photographic parasols and wearing apparel.....132
Photographs, immense.....137
Photographs, panoramic.....279
Photography, beginners in.....53
Photography, borax and sulphur.(10) 409
Photography, dry plate.....260
Photography of the electric spark 305
Photography on glass.....(15) 283
Photo-mechanical printing.....272
Photo negatives, enlarging.....322
Photo plates, cleaning.....342
Photo portraits, new style of.....114
Photo process, new dry.....307
Photo transparencies, backing for 211
Phylloxera, extermination of the*242
Phylloxera remedy, discovery of the.....385
Pictures better than stories.....238
Pie marker, new.....*134
Pigeon post in France.....85
Pigment, a new white.....176
Pills, coating with sugar.....(26) 59
Pine, the screw, of the Amazons.*293
Pipe joint.....*182
Pipes for salt brine.....248
Pipes, sheet metal.....35
P'ryl.....48
Piscicultural progress.....161
Pisciculture.....99
Piston and crank movements.*37, 69, 101, *133
Planer, improved.....*306
Planet, a new.....178
Planing and matching machine...* 1
Plant cases, Wardian.....363
Plants, greenhouse and window.. 85
Plants, potting.....344
Plants, the selection of.....343
Plants, two remarkable.....*167
Plants, unhealthy.....23
Plaster of Paris for casts.....339
Plows, shade attachment for.....* 22
Plugging screw holes.....102
Plumbago or graphite, American. 152
Plumbers, a harvest for.....149
Pneumatic despatch system, Western Union Telegraph office....*223
Pneumatic tubes, carriers in.....104
Pneumatic tubes in London.....137
Poison by ivy, antidote for.....402
Poisonous dress goods.....259
Poisonous magenta colors.....116
Poisons on molluscs, effects of.... 149
Polishing leather.....(44) 107
Polishing marble, agate, and granite.....(12) 26
Polishing tinware.....(27) 75
Polish, stove.....(49) 75
Pomatum, stick.....(7) 347
Porcelain, American.....177
Porcelain manufacture in New York.....*175, *191
Postal car, new.....53
Postal charges, increase of.....192
Postal detective surface.....2
Postal law, that odious.....229
Postal law, the new.....367
Postal palaces on wheels.....131
Postal rates, new.....337
Post office a carrier, the.....121
Potato blight, a remedy for.....276
Potato cutter and planter.....* 54
Poultice, an improved.....236
Power, steam and water.....99
Practical mechanism.....*37, *67, *011, *133, * 164, *197, *245, *277, *325, *357, *389
Printing, copper plate.....(47) 91
Printing press, new.....178
Prisons, construction of.....*388
Prize, a large.....88
Prize for quicksilver mining.....166
Prizes for chemical discoveries.. 33
Prize, the King of the Belgians' 341
Professor, a belligerent.....290
Propeller experiments.....177
Propeller, the Eagle Wing.....361, 390
Propeller, the universal jointed.. 100
Propeller trials, recent.....19
Prophecy, an old.....373
Prospects for 1875.....97
Pruning shears.....* 54
Pruning, the manipulation of....*162
Psycho exposed.....*341
Puddler, rotary.....* 82
Pump bucket, sectional.....*290
Pump, plenum and vacuum.....*118
Pump, rotary.....*278
Pumps.....*197
Purpurin, symthesis of.....20
Putty, soft.....(49) 27
Pyrophone, the.....213

Q

Quicksilver, the metallurgy of... 166
Quick transit.....149

R

Radiometer, the.....354, *392
Railroad at Nantucket.....198
Railroad on the ice, a.....85
Railroad, piracy on a.....359
Railroads in the world.....290
Railway car.....* 242
Railway depot, the Grand Central*399
Railway, food by.....180
Railway, novel single rail.....49
Railway on the sea bottom.....308
Railway, prismoidal.....193
Railway reflections.....147
Railway signals and switches....* 207
Railway signals, pneumatic.....265
Railways in Persia, Russian.....65
Railways, street, improvement wanted.....241, 244
Railway system, the American....228
Railway tie.....* 54
Railway, wire rope traction.....* 239
Railway world, the.....33
Rake, vine.....* 406
Rapid transit.....39, 149
Rapid transit in London.....385
Rapid transit in New York.....256
Rapid transit in New York city, progress of.....352
Rapid transit, up or down in.....225
Rats expelled.....66
Razor, honing a.....215
Recipes, useful 56, 66, 88, 116, 150, 180, 213, 232, 294, 312, 329, 340, 376
Red spiders.....(57) 92
Refrigerators, sideboard.....* 341
Refrigerator, underground.....* 226
Refuse, utilization of.....215
Respirator, the fireman's.....* 178
Respirator, the miner's.....388
Retina, image on, reversion of.... 20
Rheumatism in the horse, etc..295
Right to interfere, the.....368
Rifle projectile, a new.....* 212
Riveted structures.....* 275
Roaches, to destroy.....(24) 315
Road and walk cleaner.....* 338
Road rollers, steam.....* 5
Roofing, sheet iron.....* 309
Roofing, tar, paper, and gravel.. 74
Roughing out work.....325
Royal Society's soirée, the.....327
Rubber, hardening.....(20) 123
Rubber joint, chalk in a.....35
Rubber-tipped pencils.....161
Rubber, vulcanized, for belts.. 212
Rust, removing.....49

S

Sad iron, a new.....*118
Sad iron, improved.....*146
Sad iron, self-heating.....*150
Safety valve.....*291
Safety valves, formula for....(18) 330
Salicylic acid.....324
Salicylic acid, uses and properties of.....279
Salt cellar, death in the.....304
Salt interests, Michigan's.....209
Salt soils, recovery of.....326
Samson or Solomon?.....358
Sanitary sense.....41
Sardine industry, the.....* 87
Sashes, laying out device for.....*198
Saving is wealth.....231
Saw, chisel tooth.....*322
Saw, diamond stone.....* 63
Sawdust as fuel.....(52) 107
Sawdust fire lighters.....276
Saw gummer, improved.....*371
Saw, re sawing band.....*134
Saws, speed of.....(38) 60
Saw table, circular.....*230
Saw teeth, filing.....(3) 154
Saw test, the Cincinnati.....324
Scarlatina an epidemic.....49
Schiller, the wreck of the.....336
Schools of observation.....320
Science, American Association for the Advancement of.....324
Science and Art Association, New York.....160
Science Association, Social, British.....310
Science, how annihilated.....224
Science in common schooling.....208
Science record for 1875.....97
Science Record, good words for the.....165
Sciences, National Academy of....319
Scientific American, the.....360
SCIENTIFIC AMERICAN, value of the.....1, 324
Scientific and practical information.....49, 65, 81, 149, 181, 213, 241, 257, 290, 324, 344, 353, 385
Scientific collegiate contest, a.... 70
Scientific facts and speculations.. 3
Scientific progress in Australia... 82
Scientific statistics wanted.....336
Scorpion, a suicidal.....21
Scorpion fly, the.....*327
Screw, a variable.....*177
Screw threads, chasing.....*143
Screw threads for pipes.....(22) 378
Seal fisheries, cruelties of the.... 69
Seas, the Martial.....115
Sea, the bottom of the.....71
Sea, the vicissitudes of the.....213
Secretary bird, the.....*263
Seeds, new *vs.* old.....294
Seidlitz powders.....(5) 218
Senate confirmations.....65
Sewage of Paris, the.....345
Sewer gases, backing up of.....114
Sewers, the proportions of.....*130
Sewing machines, power for..(5) 10
Sewing machine, the.....97
Shafts, sprung.....99
Sharpening instrument, new.....*358
Shears for cutting bar iron.....*303
Sheave, improved.....*342
Sheep shears, support for.....*360
Sheep, wild, of California.....260
Shingle and heading machinery..*271
Shingle machine.....*262
Ships, Chilian armor-clad.....*131
Ship, the modern war.....261
Shot pouch sling.....* 1
Shrub, an ornamental.....*199
Shutter, the Clark revolving.....241
Siemens furnace, anticipated, the 310
Silk, adulterated.....181
Silk, the white streak in....232, 276
Silk, to wash.....281
Silkworm, the diseases of the...*370
Silver and gold, separating.....(40) 44
Silvering glass.....(43) 331
Silvering powder.....326
Silver ornaments, imitation.....241
Silver, pure, from silver coin..(7) 252
Skein setting machine.....*326
Skeleton, a fossil.....212
Skin grafting.....128
Slag, the utilization of.....19
Slaughtering cattle, new mode of*242
Sleep, and how to procure it.....291
Sleeplessness.....165
Slide valves and seats, facing.....325
Snail culture in France.....136
Snake, new poisonous.....257
Snow by steam, removing.....119
Snow flake, revelations of a....*178
Snow in the streets.....20
Snow, removing from streets.....256
Soap, hard.....194
Soap, shaving.....(43) 251
Society, how can it help itself?... 128
Soil for potting, preparing.....241
Solanum crinitum, the.....*279
Solar chemistry, progress of.....144
Soldering, autogenous.....167
Solders and soldering.....111, *135
Sound.....183
Sound waves, wind and.....21
Sovereigns of industry, the.....48
Spain, progress in.....115
Spawn-carrying device, a.....131
Specialty, have a.....80
Sphere, a problem relating to the. 81
Sponges, commercial.....401
Spring, to modify a.....56
Spectacles, new snow.....345
Spectra, curiosities of ocular.....114
Spectra of the planets, the.....117
Spectroscope, elements in the (61) 27
Spectroscopic quantitative analysis.....*226
Spiders, about.....242
Spiritualism, the science of....80, 113
Spiritualism to be medically considered.....121
Sponges, cleansing.....273
Sponges, commercial.....401
Sponges, curious facts about.....137
Sponges, Syrian.....208
Spontaneous combustion at steam heat.....129
Springs, car and carriage.....*280
Spring weather, the secret of.....368
Squaring numbers, method of.....212
Stains, oil, from marble.....330
Stars, the near fixed.....(10) 43
Steam as a fire extinguisher.....278
Steam boat poetry.....168
Steam climber, the.....260
Steam engineering, Turkish.....37
Steamer, the first ocean.....(1) 123
Steam hill climber.....216
Steam navigation, early.....196
Steam power in the world.....35
Steam sentinel.....*406
Steam supply.....57
Steam trap, condensed.....*305
Steam trap, non-freezing.....*163
Steam, utilizing exhaust.....165
Steel, cast and spring.....(11) 10
Steel industry, remarkable progress in the.....289
Steel making, phosphorus.....216
Steel manufacture, American.....324
Steel, phosphureted.....309
Steel rails, sawing.....39
Steel, the Blair direct process.... 388
Steel tool question, the.....20
Steel works, the Crescent.....68
Stellar indicator, a new.....*226
Stenography by machinery.....*387
Stock exchange slang.....23
Stomach, washing out the.....146
Stopper, bottle.....*242
Stoppers, to remove tight.....38
Storms, the laws of.....321
Stove damper.....*323
Stove manufacturers in council... 149
Stove pipe openings.....271
Stoves, cracks in cast iron.....35
Success in life.....85
Suez canal, profits of the.....165
Sugar, consumption of.....191
Sugar from sorghum.....90
Sugar-refining tank.....*194
Suicides, animal.....68, 99
Sulphate of nickel, pure.....274
Sulphur as a fire extinguisher 149, 278
Sulphuric acid and zinc.....(28) 186
Sulphuric acid, ebullition of.....257
Sulphuric acid, transporting.....132
Sulphur region, a.....81
Sulphur, test for.....(56) 75
Summer houses.....*295
Sun, home news by way of the.....240
Sunlight and precious stones.....404
Sun's orbit and rate of motion 196, 260
Sun's position at different seasons, the.....*259
Sun, the constitution of the.....24
Sun, the—the envelope or chromosphere.....25
Surgeons in Egypt, American.....21
Surgery, experimental, curious results of.....288
Survey of the territories.....385
Surveyor's instrument, a simple*388
Swim, learning to.....*407
Swimming bath, London, England* 7

T

Table, work.....* 146
Talent and tact.....83
Tanning process.....* 262
Taxidermy, amateur.....* 159
Technology, national university of 337
Teeth, amalgam fillings for the.....5, 49, 56, 257
Teeth, causes of decay of.....102
Teeth, the nerves of the.....(63) 155
Telegraph, alphabet, new.....165
Telegraph alphabets.....196
Telegraph alphabet, the Morse.... 213
Telegraph cable completed, the Direct.....404
Telegraph engineers, society of.. 39
Telegraphic congress at St. Petersburgh.....50
Telegraphic progress, British.....88
Telegraphing establishment, an immense.....144
Telegraph lines, underground.....306
Telegraph sounder, the snapper.. 327
Telegraphs, the British.....407
Telegraph wires, underground... 211
Telegraphy, cheap.....104
Telegraphy, early submarine.....84
Telegraphy, ocean.....*24, *40
Telegraphy, ocean—The foreign connections.....120
Telescope eyepieces, a battery of.....(6) 43
Telescopes, large.....(27) 202
Temper, color tests for.....101
Tempering circular saws.....(35) 316
Tempering sickles.....(65) 187
Tempering springs....(57) 27, (37) 363
Testing linseed oil.....(32) 139
Testing quartz.....(33) 139
Testing the air for carbonic acid. 344
Testing tinned plates.....344
Tests for metals, government.....353
Tests for steel.....345
Tests of American iron and steel. 257
Tests of building materials.....96
Thallium from soot of sulphuric acid works.....69
Thermometer, a physiological.....130
Thermometer, registering.....* 402
Thermometers, hard rubber.....372
Thinking, the art of.....147
Tides, the cause of the.....* 324
Tides, what is the cause of.....273
Tin, bisulphide of.....(12) 218
Tinning cast iron.....(12) 90
Tin, refining.....(25) 347
Tools, clattering.....322
Tools for hand turning.....* 357
Torpedoes for harbor defense.....64
Torpedo launches, high speed.....180
Torpedo warfare, spar.....* 871
Towage, success of cable.....49
Towage wanted, plan for.....49
Tracing paper, temporary.....208
Trade mark rejection, a.....192
Trade marks.....241
Trains and rolling stock.....195
Transferring to glass.....(44) 379
Transit of Venus campaigns, the. 181
Traps, bait for animal.....374
Tree protector.....* 194
Trees on boundary lines.....113
Tribune building, the New York. 274
Trichinæ.....(27) 59
Trichinæ in pork, cause of.....327
Trick, a box, to beat Hartz'.....48
Tulip tree, the.....* 83
Tunnel, British Channel, proposed.....* 243
Tunnel, the Hudson river....*210, 211
Tunnel, the Musconetcong.....41
Tunnel, the St. Gothard.....181
Tunnel under Newark Bay, proposed.....225
Tunnel under the Straits of Gibraltar.....149
Turbine steps.....96
Turning, hand.....* 245
Turpentine tool, improved.....* 323
Tyre press, hydraulic.....* 367
Tyre rolls.....327

U

Underground railway at Constantinople.....
Underground railway, New York city.....*4, *67, *93

V

Vacuum, the, a non-conductor of electricity.....2
Vagrancy, a practical cure for.... 336
Valves, adjusting locomotive.....308
Varnish, coach.....(6) 186
Varnish for balloons.....(11) 74
Varnish for gilt work.....(1) 74
Varnish for metal work.....65
Varnish for silver ware.....(18) 154
Varnish for violins.....(2) 186
Varnish for white woods.....48
Varnish for wood, hard.....323
Varnish, translucent.....(11) 170
Varnish, vulcanized rubber.....274
Vegetable camp followers.....131
Velocipede race.....404
Venus.....271
Venus as a luminous ring.....49
Venus, the transit of.....180, 319
Vinegar, making.....(11) 106
Vinegar, testing.....(69) 27
Violins, staining and polishing (33) 11
Virginia city, Nev.....115
Visual organ, our.....84
Vital power, permanence of.....72
Volcanic eruption in Iceland.....399
Voyage of life, two views of the.. 368

W

Want, a.....336
Warts, cure for.....97, 213, 280
Washing machine.....* 310
Water.....104
Water, distilled, volume and weight of.....184
Water ditches.....242
Water glass.....97
Water indicator, low.....* 310
Water in pipes, pressure of...(28) 409
Water in pump pipes, flow of.....276
Water, London.....105
Water motor, improved.....* 115
Waterproofing umbrellas.....(20) 282
Water rat taking a fly.....248
Water wheels, power by.....(20) 91
Waterworks, the new Paris.....85
Waves, hight of.....* 339
Waves, motive power from.....* 339
Wax, vegetable.....290
Wealth, the distribution of.....353
Weather, storms and spells of.....319
Wedges, angle of.....(2) 250
Weight, testing correctness of figures by.....48
Welding cast steel.....(40) 91
Welding composition.....399
Welding, curiosities of.....129
Well at Prospect Park, Brooklyn* 23
Wells, drive, in Minnesota.....228
Wheat, constituents of.....(58) 75
Wheat, steaming.....(56) 91
Wheels, finishing locomotive....* 6
Wheel spoke planing machine...* 34
Whiffletree hook.....* 274
Wicked, the generation of the.... 129
Winch, portable steam.....* 19
Windmill, how to build a.....* 241
Windmill, improved.....* 230
Wood ashes as a fertilizer.....200
Wood by lime, preserving.....342
Wooden pulleys, to harden.....369
Wood in France, consumption of. 274
Wood, preserving.....199
Wood, seasoning.....(58) 92
Wood, staining walnut color..(3) 90
Wood, to render incombustible.. 55
Wood worker, the Excelsior.....* 95
Wool grease, composition of.....114
Wool washing machinery.....* 6
Workmen live, how American.....265
World, the end of the.....70
Wounds, new cure for.....228
Wrench and bolt cutter.....* 99

Y

Yarn spooler.....* 326
Year, changing the civil.....319

© 1875 SCIENTIFIC AMERICAN, INC

Advertisements.

Back Page - - - - - - $1.00 a line.
Inside Page - - - - - - 75 cents a line.

Engravings may head advertisements at the same rate per line, by measurement, as the letter press. Advertisements must be received at publication office as early as Friday morning to appear in next issue.

BEAUTIFUL
EVER-BLOOMING ROSES,

STRONG POT PLANTS, sent safely by mail, Post Paid. Five Splendid Varieties $1.00; 12 do. $2.00. Elegant Descriptive Catalogue FREE.
THE DINGEE & CONARD CO., Rose Growers,
WEST GROVE, Chester Co., Pa.

MICE AND RATS.—A certain and sure Exterminator of these pests at last solved. the recipe of which I will send to any address on receipt of 50 cents, the cost to fill will not exceed ten cents, to rid the n from any place for a life time. No poison used, consequently no dying around the premises. Guaranteed to give entire satisfaction or money refunded. Address
D. H. WILLIS, Carbondale, Ill., P. O. Box 371.

$150! For a back-geared Screw-cutting Lathe, 12 in. swing, 36 ins. bet. centers. Weight, 800 lbs.
F. SHAW, Lyons, Iowa.

Excelsior Scroll Saw **Latest Improvement.**
Double Treadle, including one doz. Saws, thirty inimitable Fret Sawing Patterns & Prepared Wood to the value of $4. A new device for tightening Saw, Power Drilling attachment, Wrench, Oil cup, and Screw driver. Speed 800 strokes per minute. Saws 1½ in. thick. Price, complete, cased and delivered on board cars, or at Express office, $12.
SMALL STEAM ENGINES, with copper Boiler, to drive light Lathes, Scroll Saws, &c. 100 Scroll WORK Designs Free on receipt of stamp. GEO. PARR, Buffalo, N. Y.
Saw only, without Attachments, $9.00.

DYNAMO ELECTRIC MACHINES for depositing SILVER or NICKEL; prices $10.00 and $15.00.
CHARLES STOWELL, No. 2 Beverly Street, Boston, Mass.



THE
Eureka Portable Engine.
Complete with fixtures, 3 Horse Power, **$250.**
Cheap—Safe—Economical.
☞ Send for circular.
A. C. TULLY.
55 Dey St., N. Y.

FOR SALE—The old-established Foundry and Machine Shop, situated in the thriving city of Jacksonville, Morgan county, Illinois. The works are situated at the junction of the T. W. & W. & C. A. & St. Louis and other railroads, being convenient for shipping. Lathes, iron planers, boring mill, drill press, screw-cutting machine, wood-working machinery, a large stock of all kinds of patterns, blacksmith tools, and every thing connected with the business, all in complete running order. The above property will be sold on liberal terms or traded for real estate or western lands. There is no other foundry within 30 miles. A car works has just been completed in the town, making it a most desirable location for any one wishing to engage in the business. The reason for selling, the owner has more business than he can attend to. Correspondence solicited.
JOHN FIDLER, Jacksonville, Morgan county, Ill.

The HOADLEY PORTABLE STEAM ENGINE.
WITH AUTOMATICAL CUT OFF REGULATOR AND BALANCED VALVE



STATE WHERE YOU SAW THIS
THE BEST AND MOST ECONOMICAL ENGINE MADE
SEND FOR CIRCULAR.
THE J.C.HOADLEY CO. LAWRENCE, MASS.

WELLS' EVERY MAN HIS OWN LAWYER AND BUSINESS FORM BOOK. By JOHN G. WELLS. **A Complete Guide in all Matters of Law and Business Negotiations.** ☞ FOR EVERY STATE IN THE UNION. ☜ With full Instructions for Proceeding Without Legal Assistance in Suits and Business Transactions of every description. Containing: Legal Forms of Deeds, Mortgages, Leases, Affidavits Depositions, Bonds, Orders, Contracts, Powers of Attorney, Certificates of Citizenship, Agreements, Assignments, Awards, Declarations, Demands, Letters of Credit, Arbitration, Partnership, Releases, Wills, Codicils, Submissions, Land Jointures, Tenants' and Landlords' Receipts, Public Lands, Land Warrants, Composition with Creditors, Oaths, Satisfaction of Mortgages, Pre-emption Laws, Marriage and Divorce, Patent Laws, with full Instructions to Inventors; Pension Laws, with full Instructions to enable the discharged soldier or sailor to procure back pay, pensions, bounties, and all war claims; the Laws of the Different States concerning Property Exempt from Execution. Collection of Debts, Mechanics' Liens, Contracts, Limitation of Actions, Usury, Qualifications of Voters, Licenses to Sell Goods, etc Also, containing the Internal Revenue Laws, Stamp Duties, Post-Office and Custom-House Regulations. Constitution of the United States, with Amendments, the whole action of the Government in Relation to Reconstruction and the Freedman, Seals of the Different States, with descriptions, etc.
There is no class of the community, male or female, who have, or expect to have any property, or who have any rights or privileges which require protection, who will not be greatly benefited and advantaged by the possession of the book. It will save them money, save them trouble, save them time, save them litigation and lawyers' fees, and give them information which nobody can afford to be without.
The Work embraces 650 large 12mo. pages, and is printed on fine paper, handsomely bound.
Price, Cabinet Library Binding.....$2.25
Sent post-paid on receipt of price.
Address JOHN G. WELLS,
No. 27 Clinton Place, New York.

The TOLL-GATE! **Prize Picture** sent free! An ingenious gem! **50** objects to find! Address, with stamp, E. C. ABBEY, Buffalo, N.Y.

PLANING AND MATCHING
MACHINES
UNIVERSAL WOOD WORKERS
TRADE MARK
WOOD WORKING MACHINERY.
BENTEL, MARGEDANT & CO.
HAMILTON, OHIO.
Send for Catalogue and Price List.

FIRE PROOF SHUTTERS.

CLARK & CO'S SELF-COILING ROLLING STEEL SHUTTERS (Burglar Proof), For Store Fronts and Rear Windows, require no machinery or balance weights, and can be applied to any opening; also Rolling Wood Shutters for Stores and Dwellings. Thousands are in daily use, and are acknowledged the best shutters in the world. Send for Catalogue to JAMES G. WILSON, Manager,
218 West 26th St., New York, and at
London, Paris, Vienna, and Berlin.

STEAM PUMPS.
FIRST PRIZES, VIENNA, PARIS, NEW YORK, BALTIMORE, BOSTON.
Send for circular of recent patented improvements.
THE NORWALK IRON WORKS,
South Norwalk, Conn.

BLAKE'S PATENT
Stone and Ore Breaker
Crushes all hard and brittle substances to **any required size.** Also, any kind of STONE for ROADS and for CONCRETE, &c.
Address BLAKE CRUSHER CO.,
New Haven, Conn.

PUNCHING AND DROP PRESSES. For the **Best** and **Cheapest** address THE STILES & PARKER PRESS CO., MIDDLETOWN, CONN

FACTORIES TO LET AT HAVERSTRAW, N. Y., on the Hudson River. Two large brick factories, respectively 3 stories, 94x30, with extension 1 story 97x35, and three stories 90x38; abundant water power in each; turbine and overshot wheels. Railroad and steamboat communication with New York. For particulars, address JOHN PECK, Haverstraw, N. Y.

DITCHING AND DRAINAGE MACHINES furnished at a moderate cost, cutting ditches of any width and depth in ground free from stumps and rocks. Machines worked by from four to six horses, and two men will do the labor of fifty men a day at least State and County Rights for Sale. Address
RANDOLPH BROTHERS,
111 Broadway, New York City.

Model Engines.
Complete sets of **Castings** for making small Model Steam Engines 1¼ in. bore, 3 in. stroke, price $4; ditto 2 in. bore, 4 in. stroke, price $10, same style as cut. Eureka Foot Lathes only 15 Dollars. Gear Wheels and Parts of Models. All kinds of Small Tools and Materials. Illustrated Catalogue Free.
GOODNOW & WIGHTMAN, 23 Cornhill Boston, Mass

A NEW BOOK:
"BUSINESS on the PACIFIC COAST."
Giving an account of every Business, Profession and Trade, together with Salaries, Wages, Professional Fees, necessary Expenses, and Profits. By a School Teacher. Price 50 cents. Address
PROF. L. LILLARD, Dixon, Cal.

A SAW THAT IS A SAW—Self-Feeding, cuts 3 inc. plank same ease as 1 inch. 1 man do like amount of work as 3 men. A. B. COHU, 197 Water Street, New York.

BAKER'S
Rotary Pressure Blower,
Warranted superior to any other, Rotary or Reciprocating. T. WILBRAHAM & BROS.
2316 Frankford Avenue,
PHILADELPHIA.

Special Notice to Dealers in and Users of
Wood Working Machinery.
WORCESTER, MASS., May 25, 1875.
The undersigned, having purchased the entire Manufacturing Establishment of R. BALL & CO., including PATTERNS, PATENTS, GOOD WILL, CORRESPONDENCE, and everything pertaining to the business (book accounts excepted), will continue the manufacture of Wood Working Machinery, and be prepared to furnish new machines, or parts for repairs, as furnished by either concern in years past.
We shall at once remove our present Works to our new quarters—uniting the two establishments—and be able to furnish customers with improved Machinery, both in quality of stock and workmanship, and at reasonable prices.
We would take this opportunity to return our thanks to our old friends and customers, and would be most happy to see them at our new quarters (26 Salisbury Street), and would remind them that we shall continue to manufacture Wood Working Machinery generally, making a specialty of Woodworth, Daniels' and Dimension Planers, Surfacing Machines, Tenoning, Mortising, and Re-Saw Machines, Saw Benches, &c. Yours, respectfully,
WITHERBY, RUGG & RICHARDSON,
26 Salisbury St., Worcester, Mass., U.S.A.



THE IMPROVED ARMSTRONG HEATER AND LIME CATCHER.—The best and most reliable machine made to protect Steam Boilers, with partitions for over and under currents to purify the water and Burlaps screen to prevent any impurities from entering the pumps. All parties using steam should have one.
For particulars and circulars, send to
M. KNIGHT,
MANUFACTURER,
Toledo, Ohio.

Export.
MANUFACTURERS AS WELL AS OWNERS OF PATENT RIGHTS,
who wish to export to Europe, or wish to be represented there, can send samples or illustrated circulars with particulars to the undersigned, who, after a residence of 20 years in the U.S., has established a house in Germany for the *exclusive sale of* AMERICAN GOODS.
Prompt attention and perseverance have made the enterprise a success. Address all letters or samples to
M. ERLEBACH,
20 Dultplatz, Munich, Germany.
Refers to Messrs. M. Herzog & Co., 354 Broadway, and John H. Knapp & Co., 17 John St., New York. Horace Partridge & Co., 51 Hanover St., Boston.

Bradley's Cushioned Hammer



has larger capacity, is more durable, takes up less room, does more and better work with less expense for power and repairs than any other Hammer in use.
Guaranteed as recommended. Address
BRADLEY Manufacturing Company,
SYRACUSE, N.Y.

$60 TO $90 a week and expenses to all. Articles new, staple as flour. Samples free. C. M LINGTON & BRO., N. Y. or Chicago.

$77 A WEEK to Male and Female Agents, in their locality. Costs NOTHING to try it. Particulars FREE. P. O. VICKERY & CO., Augusta, Me.

OTIS' SAFETY HOISTING Machinery.
OTIS, BROS. & CO
No. 348 BROADWAY, NEW YORK.

Planing & Matching,
Moulding, Re-sawing and Tenoning Machines. Scroll Saws and General Wood-Working Machinery.
JOHN B. SCHENCK'S SONS { Matteawan, N. Y.
Send for Catalogue. { 118 Liberty St., N. Y. City

Machinists' Tools.
All sizes at low prices. E. GOULD, Newark, N. J.

A. S. GEAR, BOSTON, furnishes all kinds of **Machinery & Mechanical Supplies** at popular prices.

EAGLE FOOT LATHES,

With Scroll and Circular Saw Attachments, Slide Rest, Tools, &c.; also Small Engine Lathes, Metal Hand Planers, &c. Neatest designs, superior finish **Low Prices.** Our new Catalogue describes these and every tool necessary for the Amateur or Artizan. Send for it.
WM. L. CHASE & CO.,
95 & 97 Liberty St., New York.

PATENT
Planing & Matching
and Molding Machines, Gray and Wood's Planers, Self oiling Saw Arbors, and other wood-working machinery.
S. A. WOOD'S MACHINE CO., { 91 Liberty St., N. Y.
Send for Circulars, etc. { 67 Sudbury St., Boston.



Barnes' Foot-power Scroll Saws and Lathe.
An entire REVOLUTION in the construction of foot-power machines! The old style thrown aside when these are known! Thousands now in use! $1,500 to $2,000 per year made using them. One person out of every three who send for catalogues of these machines buys one. Say what paper you read this in, and address
W. F. & J. BARNES,
Rockford, Winnebago Co., Ill.
Box 2044.

FOR SECOND HAND MACHINERY—Apply to S. C. HILLS, 51 Cortlandt Street, New York.

Machinist's Tools.
Engine Lathes, Planers, Upright Drills, Hand and Chucking Latches, Boring Machines, and other tools of heavy weights, first class stock and workmanship. Prices to suit the times. Send for Illustrated Catalogue.
LATHE & MORSE TOOL CO., Worcester, Mass.

The Myers Portable Engine, 4, 5, 6, 8 n.p. Something new, best for price. Circulars.
CHAS. PLACE, 106 Reade St., N. Y.



Boult's Patent
Reverse Motion Paneling, Variety Moulding and Dovetailing Machine,
cuts Panels of any design or style of mould in the solid wood with neatness and dispatch. Is a first class Shaper, Edge and Scroll Moulder. Does general Dovetailing with thick or thin stuffs. *Simple, Durable, and Efficient.*



☞ Send for Pamphlet and Sample of work.
Improved Solid Steel Cutters for all kinds of Variety Moulders made to order, and warranted by the
B. C. MACHINERY CO.,
Battle Creek, Mich

Catalogue for 1875, FREE
FOOT LATHES, $15 and upwards.—Keystone Portable Forges, Fleetwood Scroll Saws, Machinist's, Blacksmith's, Model Maker's, and Carver's Tools and fine Hardware.
A. J. WILKINSON, & CO., **Boston, Mass.**
☞ Headquarters for any thing in the Hardware line.



Water Wheels.
More than four times as many of Jas. Leffel's Improved Double Turbine Water Wheels in operation than any other kind. 24 sizes made, ranging from 5¾ to 96 in. diam., under heads from 1 to 240 ft. Successful for every purpose. Large new pamphlet, the finest ever published, containing over 30 fine illustrations, sent free to parties interested in water power.
JAS. LEFFEL & CO.,
Springfield, O., & 109 Liberty St., New York City.

MANUAL OF PATENT LAW AND "SALE OF PATENTS." For Inventors and Manufacturers. Commended by this paper. Postpaid, $2 50. Address, for circulars, W. F. SIMONDS (Counsellor in Patent Law), Hartford, Conn.



Manufacturer,
Pawtucket, R. I.

Ladies Can make $5 a day in their own City or Town. Address ELLIS M'F'G CO., Waltham, Mass.

WORCESTER FREE INSTITUTE.
School of Applied Science. For catalogue, address PROF. C. O. THOMPSON, Worcester, Mass.

A GOLDEN HARVEST FOR AGENTS.—Brooks' Patent Diamond Steel Knife and Scissors Sharpener is perfection; latest and best selling invention out; price $8 per hundred; sent C. O. D. by sending 20 per cent of amount of order. Silver-plated sample, elegantly finished, with circular, by mail, for 25 cents.
R. L. FLETCHER, 111 Chambers St., New York.

THE
TRADE ENGINE.



Noiseless in operation—Perfect in workmanship—all light parts of Cast Steel.
Every Engine indicated, and valve corrected to give the highest attainable results.
Warranted superior to any semi-portable Engine in the market.
Send for Price List and Circular.
HERRMAN & HERCHELRODE M'F'G. CO.,
Dayton, Ohio

MAGNETS—Permanent Steel Magnets of any form or size, made to order by F. C. BEACH & CO., 246 Canal St., New York. Makers of the celebrated Tom Thumb and Miniature Telegraph Instruments.

12 Beautiful French Oil Chromos, size 9x11, mounted ready for framing, sent postpaid for **ONE DOLLAR.** Grandest chance ever offered to Agents. For particulars send stamp. Address **F. P. Gluck,** New Bedford, Mass.

YALE IRON WORKS,
New Haven, Conn.,
Builders of the YALE VERTICAL the *best* and most *Economical*, either for land or marine use; also HORIZONTALS, with or without the *Rider* Cut-off.



SPECIAL TOOLS made to order, all at prices that defy competition. Send for Circular.

STENCIL DIES For cutting business Stencils, all sizes. Also complete OUTFITS for Clothing Stencils and Key Checks, with which young men are making from $5 to $20 a day. Send for Catalogue and samples to S. M. SPENCER, 117 Hanover St., Boston, Mass.

AGENTS WANTED.

Men or women. $34 a week. Proof furnished. Business pleasant and honorable with no risks. A 16 page circular and Valuable Samples free. ☞ A postal-card on which to send your address costs but one cent Write at once to
F. M. REED. 8TH ST., NEW YORK.

IMPROVED MACHINERY for STAVE HEADING, SHINGLE AND HANDLES, CABINET MAKER'S MACHINERY, BAILEY GAUGE LATHE, DURKEE'S AUTOMATIC SAW MILL (Improved), KEY SEAT CUTTING, PULLEY BORING AND MILLING MACHINES, RADIAL DRILLS, STEAM ENGINES, & BOILERS, VENEERING MACHINES, CABLE & SHEAVES, for transmitting Power, etc. etc.
T. R. BAILEY & VAIL, Lockport, N. Y.

MACHINERY.

IRON & WOOD WORKING MACHINERY OF EVERY DESCRIPTION.

Cold Rolled Shafting.

HANGERS, PULLEYS, COUPLINGS, BELTING, &c &c. Send for Illustrated Catalogue and Price List.
GEORGE PLACE & CO.,
121 Chambers & 103 Reade Sts. N. Y. City

THE IMPROVED
NIAGARA STEAM PUMP,



98 to 97 *Pearl St., Brooklyn, N.Y.*
Agency at 40 John St., New York.
Hubbard & Aller.
SOLE MANUFACTURERS,
ENGINES AND BOILERS.
Pulleys, Shafting and Hangers a Specialty.

PIERCE WELL AUGER
Company offers $1,000 to any one that will successfully compete with them in boring a 20-inch well, through soapstone and sandstone, and in taking up and passing bowlders and loose stones. Agents wanted in every State. **$25 PER DAY GUARANTEED.** Send for CATALOGUE. FREE. Address
CHAS. D. PIERCE, Peru, Illinois.

GLASS MOULDS, for Fruit Jars, Lamps Bottles, Ink Stands, etc., made by H. BROOKE 15 years COR. WHITE and CENTRE STS., N. Y. For anything new in glass, you will require a mould (or die).
Every description of moulds for glass, rubber, zinc, etc. Send model or drawing, inclose stamp.

7,000 IN USE
BLAKE'S STEAM PUMPS
FOR EVERY POSSIBLE DUTY
GEO F. BLAKE MFG CO. 79 & 81 LIBERTY ST. N.Y.
CAUSEWAY & FRIEND STS. BOSTON.
50 CANAL ST. CHICAGO.
SEND FOR ILLUSTRATED CATALOGUE.

TENTH INDUSTRIAL EXHIBITION,
UNDER THE AUSPICES OF THE
Mechanics' Institute of San Francisco.
Manufacturers, Mechanics, and others are advised that the above EXHIBITION will be opened in San Francisco on the 17TH DAY OF AUGUST next, and continue open at least one month.
The Board of Managers invite all who desire to exhibit to send in their applications for space, without delay, to Mr. J. H. CULVER, *Secretary*, 27 POST ST., SAN FRANCISCO, CAL., who will promptly answer all inquiries.
700,000 persons, from all parts of the Pacific, visited the last Exhibition, to see what could be learned or purchased in San Francisco and the United States.
San Francisco, with its population of a quarter of one million, is in intimate relations with Japan, China, Australia, Mexico, Hawaiian Islands, British Columbia, the various Islands of the Pacific, and contiguous domestic Territory. There is no charge for Exhibition Space; and power for driving machinery, etc., is furnished free.
By order of the Board. A. S. HALLIDIE, *President.*

THE
BIGELOW ENGINE,

The Cheapest and Best Portable Engine offered to the Public. Price, 4 h.p., $300; 6 h.p., $400; 7 h.p. $475; 8½ h.p., $540; 12 h.p., $725; 15 h.p., 900.
Price of Stationary Engines: 4 h.p., $150; 6 h.p., $175; 7 to 8½ h.p., $225; 12 to 15 h.p., $300.
Send for Illustrated Circular and Price List.
H. B. BIGELOW & CO.,
New Haven, Conn.

STEVENS' MITRE BOX
The best machine ever invented; sets to any angle, and will last for years. Price $8.00. Sent to any address, on receipt of price. G. M. STEVENS, P. O. Box 1986 Portland, Me.

© 1875 SCIENTIFIC AMERICAN, INC

Advertisements.

Back Page . . . . . $1.00 a line.
Inside Page . . . . . 75 cents a line.

Engravings may head advertisements at the same rate per line, by measurement, as the letter press. Advertisements must be received at publication office as early as Friday morning to appear in next issue.

ROGERS' TANNATE OF SODA BOILER SCALE PREVENTIVE. JOS. G. ROGERS & CO., Madison, Ind. ☞ Send for book on Boiler Incrustation.

RANSOM'S CONDENSER saves Twenty-five per cent fuel, or will give that much more power, and will reduce boiler pressure 25 lbs. to square inch. Send for Circular to T. SAULT, Gen'l Ag't, New Haven, Conn.; or I. L. ALBERGER. Treas., Buffalo, N. Y.

TWIST DRILL GRINDING MACHINES, EXpanding Boring Bars, Self-Feeding Hand Drills, Rotary Shapers, Planers, Drilling Machines. C. VANHAAGEN & CO., makers of Improved Machine Tools, Phila.

FOR BEST STEEL STAMPS, address J. W. STRANGE, Bangor, Me.

PROVIDENCE, R. I.

J. W. Strange: Dear Sir—Having used steel stamps of your cutting for many years, we prefer them to those of any other make. For correct form of letters and for clearness of impression of very fine stamps, you certainly excel. Yours truly. DARLING, BROWN & SHARPE.

FOR SALE.—THE BEST THING ON THE Continent. An inexhaustible Bed of Phosphate of lime. Located with every advantage. Address. C. B. LEITNER Geneva. Ga.

PATENT
COLD ROLLED SHAFTING.

The fact that this Shafting has 15 per cent greater strength, a finer finish, and is truer to gage, than any other in use, renders it undoubtedly the most economical. We are also the sole manufacturers of the CELEBRATED COLLINS' PAT. COUPLING, and furnish Pulleys, Hangers etc., of the most approved styles. Price list mailed on application to JONES & LAUGHLINS, Try Street, 2nd and 3rd Avenues, Pittsburgh, Pa. 190 S. Canal st., Chicago, Ill.

☞ Stocks of this Shafting in store and for sale by FULLER, DANA, & FITZ, Boston, Mass. GEO. PLACE & CO., 121 Chambers street, N. Y. PIERCE & WHALING Milwaukee, Wis.

Todd & Rafferty Machine Co.

MANUFACTURERS OF

The celebrated Greene Variable Cut-Off Engine; Lowe s Patent Tubular and Flue Boilers; Plain Slide Valve Stationary, Hoisting, and Portable Engines. Boilers of all kinds. Steam Pumps, Mill Gearing, Shafting, &c., Silk, Tow Oakum, Bagging, Rope, Flax, and Hemp Machinery, Agents for the New Haven Manufacturing Co.'s Machinist's Tools; for Judson's Governors and Stop-Valves; Sturtevant Blowers; and Differential Pulley-Blocks. WAREROOMS, 10 BARCLAY ST., NEW YORK WORKS PATERSON. NEW JERSEY.

Trow's
N.Y. CITY DIRECTORY

Vol. Lxxxix.,

FOR YEAR ENDING

May 1st, 1876,

IS PUBLISHED,

And can be obtained from our Canvassers, or on application at

THE COMPANY'S OFFICE,
No. 11 University Place,
New York City.

TRADE MARK. CONCORD (USE) N.H. GENUINE
CONCORD AXLES

The Standard—Best Stock—Finest Finish.

MANUFACTURED ONLY BY

D. ARTHUR BROWN & CO., Fisherville, N.H.

TO PATENTEES AND MANUFACTURERS.—A first-class house of long standing, with business premises in the best part of the City of London, England, is open to arrange for the sale or exclusive purchase of any article (patented preferred) of large consumption for domestic use. Cash advances to any amount might be made. The highest references in America and England. Apply, with full particulars, to X. Y. Z., HAYWARD & SONS, 58 St. Paul's Churchyard, London England

IMPORTANT FOR ALL LARGE CORPORATIONS AND MANUFACTURING CONCERNS.—**Buerk's Watchman's Time Detector**, capable of controlling, with the utmost accuracy, the motion of a watchman or patrolman, as the same reaches different stations of his beat. Send for a Circular

J. E. BUERK, P. O. Box 979, Boston, Mass.

N. B.—This detector is covered by two U. S. Patents. Parties using or selling the e instruments without authority from me will be dealt with according to law

WROUGHT IRON
BEAMS & GIRDERS

THE Union Iron Mills, Pittsburgh, Pa. The attention of Engineers and Architects is called to our improved Wrought-Iron Beams and Girders (patented), in which the compound welds between the stem and flanges, which have proved so objectionable in the old mode of manufacturing, are entirely avoided. We are prepared to furnish all sizes at terms as favorable as can be obtained else where. For descriptive lithograph address Carnegie Brothers & Co., Union Iron Mills, Pittsburgh, Pa

Machinery of Improved Styles for making
SHINGLES HEADING, AND STAVES

Sole makers of the well known IMPROVED LAW'S PATENT SHINGLE AND HEADING SAWING MACHINE. For circulars address TREVOR & CO., Lockport, N. Y.

RICHARDSON, MERIAM & CO., Manufacturers of the latest improved Patent Daniels' and Woodworth Planing Machines Matching, Sash and Molding, Tenoning, Mortising, Boring, Shaping, Vertical and Circular Re-sawing Machines, Saw Mills, Saw Arbors, Scroll Saws, Railway, Cut-off, and Rip-saw Machines, Spoke and Wood Turning Lathes, and various other kinds of Wood-working Machinery. Catalogues and price lists sent on application. Manufactory, Worcester, Mass. Warehouse, 107 Liberty Street, New York. 17

H.W. JOHNS' PATENT
ASBESTOS MATERIALS

ASBESTOS ROOFING, adapted for steep or flat roofs in all climates.

ASBESTOS ROOF COATING, for restoring and preserving old Roofs.
ASBESTOS CEMENT, for repairing leaks around Chimneys, Dormer Windows, etc. In 10 lb. pails.
ASBESTOS ROOFING PAINT, a strictly first-class article, superior body, rich color.
ASBESTOS PAINTS, all colors, for outside work, ready for use. In pails, kegs, and barrels.
ASBESTOS BOILER FELT and CEMENT FELTING, for Steam Pipes, Boilers, etc.
ASBESTOS STEAM PACKING. In regular sizes of rope, from ¼ to 1½ inches diameter.

All of these materials are prepared ready for use, and can be easily applied by any one. Send for Illustrated Pamphlets, Price Lists, etc. Liberal inducements to General Merchants and Dealers.

Also for sale by ☞ Infringers and the public are cautioned. ☜

DOWNIE, TRAINER & CO., Boston,
R. H. IVES & CO., Montreal,
KIRKWOOD & DUNKLEE, Chicago.
} H. W. JOHNS, 87 Maiden Lane, N. Y.

PORTLAND CEMENT

For Walks, Cisterns, Foundations, Stables, Cedars, Bridges, Reservoirs, Breweries, etc.
Remit 6 cents postage for Practical Treatise on Cements.
S. L. MERCHANT & Co., 76 South St., New York

THE TANITE COMPANY
Emery Wheels ☆ TANITE ☆ Emery Grinders
STROUDSBURG MONROE Co. PA.

Wilson's Business Directory of New York City,

1875—1876. Vol. xxviii.

POCKET SIZE, containing the names of all firms and individuals engaged in ANY BUSINESS in New York City, duly classified under their appropriate headings.

INDISPENSABLE to every merchant or manufacturer buying or selling goods in this city, enabling him to see at a glance the names of all firms engaged in any line of business. Price $2.50, free by mail.

THE TROW CITY DIRECTORY CO., 11 UNIVERSITY PLACE, N. Y.

IRON PLANERS,

ENGINE LATHES, DRILLS, &c. Send for Price List.
NEW HAVEN MANUFACTURING CO., New Haven, Conn.

Steam Super-Heaters,

Set under boilers, or in separate furnace, will supply *Dry* Steam of any required temperature, and save fuel.
HENRY W. BULKLEY, 98 Liberty St., New York.

Pyrometers,

For showing heat of Ovens, Hot blast pipes, Boiler flues, Super-Heated Steam, Oil Stills, &c.
HENRY W. BULKLEY, Sole Manufacturer, 98 Liberty St., New York.

ROOFS

Full particulars how to repair **old** ones, **save** re-shingling, **prevent** decay, and **Stop Leaks, effectually and Cheaply,** in roofs of all kinds. Send postal card to "Box 1761, N. Y.," giving your address, and receive Book (100 pages) free, with simple directions how to lay new roofs,
DO YOUR OWN PAINTING and **save** money. Write **at once.**
N. Y. Slate Roofing Co.,
Boston, Philadelphia, and 8 Cedar St., N. Y

Portland Cement,

From the best London Manufacturers. For sale by JAMES BRAND, 55 Cliff St., N. Y.
A Practical Treatise on Cement furnished for 25 cents.

Machinists' Tools.

EXTRA HEAVY AND IMPROVED PATTERNS.
LUCIUS W. POND, MANUFACTURER, Worcester, Mass.
WAREROOMS 98 LIBERTY St., N. Y.
☞ *Lathes, Planers, Boring Mills, Drills, and Gear Cutters a Specialty.*



CHASE'S
Pipe-Cutting and Threading Machine.

This important tool is designed to fill a want long felt by *STEAM AND GAS FITTERS* and *MACHINISTS*, for cutting and threading pipes rapidly and cheaply. An *apprentice boy*, with one of these, can do more work than *two men* with old appliances, under the old system. *NO PIPE SPLITTING! NO BEVEL INSIDE OR OUT!* It cuts threads and makes nipples for all sizes of pipes, from ⅛ to 2 inches. Weighs only 100 lbs. Stronger than any machine made. A full set of collars and lengths for making nipples goes with the machine. Address
THE CHASE MANUFACTURING COMPANY,
☞ Send for Circular. 120 *FRONT STREET, NEW YORK.*
For Sale by Morris, Tasker & Co., Philadelphia, New York, and Boston. and W. H. Banks & Co., 34 & 36 South Canal St., Chicago.

Munn & Co.'s Patent Offices.

Established 1846.

The Oldest Agency for Soliciting Patents in the United States.

TWENTY-EIGHT YEARS' EXPERIENCE.

MORE PATENTS have been secured through this agency, at home and abroad, than through any other in the world.

They employ as their assistants a corps of the most experienced men as examiners, specification writers, and draftsmen that can be found, many of whom have been selected from the ranks of the Patent Office.

SIXTY THOUSAND inventors have availed themselves of Munn & Co.'s services in examining their inventions, and procuring their patents.

MUNN & CO., in connection with the publication of the SCIENTIFIC AMERICAN, continue to examine inventions confer with inventors, prepare drawings, specifications, and assignments, attend to filing applications in the Patent Office paying the government fees, and watch each case step by step while pending before the examiner. This is done through their branch office, corner F and 7th Streets, Washington. They also prepare and file caveats, procure design patents, trademarks, and reissues. attend to rejected cases (prepared by the inventor or other attorneys), procure copyrights, attend to interferences give written opinions on matters of infringement, furnish copies of patents: in fact attend to every branch of patent business both in this and in foreign countries.

Patents obtained in Canada, England, France, Belgium Germany, Russia, Prussia, Spain, Portugal, the British Colonies, and all other countries where patents are granted.

A special notice is made in the SCIENTIFIC AMERICAN of all inventions patented through this Agency, with the name and residence of the patentee. Patents are often sold, in part or whole, to persons attracted to the invention by such notice.

A pamphlet of 110 pages, containing the laws and full directions for obtaining United States patents, also a circular pertaining exclusively to Foreign Patents, stating cost for each country, time granted, etc., sent free. Address

MUNN & CO.,
Publishers SCIENTIFIC AMERICAN,
37 Park Row, N. Y.
BRANCH OFFICE—**Corner F and 7th Streets** Washington D. C.



Shaping Machines

Have novel device for changing length of stroke while in motion, also, automatic down feed, and quick return. Four sizes. Patented 1868, 1871, 1874.
Wood & Light Machine Co.
Worcester, Mass.
Manufacturers of all kinds of Iron Working Machinery Shafting, Pulleys, &c.



Niagara Steam Pump Works

ESTABLISHED 1862.
CHARLES B. HARDICK,
No. 23 Adams Street,
BROOKLYN, N. Y.

THE SIXTH Cincinnati Industrial Exposition

Opens for the reception of goods **August 2, 1875.** Opens to the public **September 8th,** and continues open until **October 9th.**

16 GRAND DEPARTMENTS,

and an extended premium list in medals and gold coin.

Machinery Tested and Fully Reported upon.

Send for rules and premium list, and blank applications for space.

FRANK MILLWARD, Sec'y.

WIRE ROPE

Address JOHN A. ROEBLING'S SONS, Manufacturers, Trenton. N. J., or 117 Liberty St., New York. Wheels and Rope for conveying power long distances. Send for Circular.

Improved Foot Lathes.

Small Engine Lathes, Small Gear Cutters, Hand Planers for metal, Ball Turning Machines, Slide Rests, Foot Scroll Saws for light and heavy work, Small Power Scroll Saws, Foot Circular Saw Machines. The very best. Many readers of this paper have one of them. Catalogues free. N. H BALDWIN, Laconia N H
Just the articles for Artisans or Amateurs.

PERFECT
NEWSPAPER FILE.

—:o:—

The Koch Patent File, for preserving newspapers, magazines, and pamphlets, has been recently improved and price reduced. Subscribers to the SCIENTIFIC AMERICAN can be supplied for the low price of $1.50 by mail, or $1.25 at the office of this paper. Heavy board sides; inscription, "SCIENTIFIC AMERICAN," in gilt. Necessary for every one who wishes to preserve the paper

Address **MUNN & CO.,**
Publishers "SCIENTIFIC AMERICAN."

☞ T. V. Carpenter. Advertising Agent. Address Box 773, New York city.

DAMPER REGULATORS **BEST** AND LEVER GAGE COCKS.
MURRILL & KEIZER. 44 Holliday St., Balt.

BOOKS FOR BUILDERS.
SEND FOR ILLUSTRATED CATALOGUE
A. J. Bicknell & Co., 27 Warren St., N. Y.

"Lowest Priced and BEST."
Excelsior Portable Printing Presses
Do Your Own Printing
$3 Press for cards, labels, envelopes, etc. Larger sizes for larger work.
Business Men do their printing and advertising, save money and increase trade. **Amateur Printing,** delightful pastime for spare hours. **BOYS** have great fun and make money fast at printing. Send two stamps for full catalogue presses type etc to the Mfrs
KELSEY & CO., Meriden, Conn.

THE BEST INJECTOR

For Locomotive and Stationary Boilers.
FRIEDMANN'S PATENT.
Over 15,000 Now in Use Here and in Europe

Throws more and hotter water, with less steam, than any others. It has two Waterways, fixed Nozzles, and no movable parts to get out of order.

NATHAN & DREYFUS, Sole Manufacturers,
108 Liberty St., New York.
☞ Send for Catalogue.

BOGARDUS' PATENT UNIVERSAL ECCENTRIC MILLS—For grinding Bones, Ores. Sand, Old Crucibles, Fire Clay, Guanos, Oil Cake, Feed, Corn, Corn and Cob, Tobacco, Snuff, Sugar, Salts, Roots. Spices, Coffee. Cocoanut, Flaxseed, Asbestos, Mica. etc., and whatever cannot be ground by other mills. Also for Paints, Printers' Inks, Paste Blacking, etc. JOHN W. THOMSON, successor to JAMES BOGARDUS, corner of White and Elm Sts., New York.

NOYE'S
Mill Furnishing Works

are the largest in the United States. They make Burr Millstones, Portable Mills. Smut Machines, Packers, Mill Picks, Water Wheels, Pulleys and Gearing, specially adapted to flour mills. Send for catalogue.
J. T. NOYE & SON, Buffalo, N. Y.

CHEMICAL LABORATORY.—Analyses—Assays—Advices. A. BOURGOUGNON, 91 Duane St., cor. B'dway.

HARTFORD STEAM BOILER Inspection & Insurance COMPANY.

W. B. FRANKLIN, V. P't. J. M. ALLEN, Pres't.
J. B. PIERCE, Sec.
HARTFORD, CONN.

NON-COMBUSTIBLE STEAM BOILER & PIPE
COVERING

Saves ten to twenty per cent. CHALMERS SPENCE CO., foot E. 9th Street N. Y.: 1202 N. 2nd St., St. Louis. Mo.

THE NATIONAL
Steel Tube Cleaner.

PATENTED JULY 28 1874.

Adopted and in use by U. S. Navy. For sale by dealers. Send for Circular. THE CHALMERS SPENCE CO. foot E. 9th Street, N. Y., Agents for the U. S.

PROSPECTUS

OF THE
SCIENTIFIC AMERICAN,
FOR 1875.
THE MOST POPULAR SCIENTIFIC PAPER IN THE WORLD.

THIRTIETH YEAR.

VOLUME XXXII.—NEW SERIES.

The publishers of the SCIENTIFIC AMERICAN beg to announce that on the second day of January, 1875, a new volume commenced. It will continue to be the aim of the publishers to render the contents of the new volume more attractive and useful than any of its predecessors.

To the Mechanic and Manufacturer.

No person engaged in any of the mechanical pursuits should think of doing without the SCIENTIFIC AMERICAN. Every number contains from six to ten engravings of new machines and inventions which cannot be found in any other publication.

The SCIENTIFIC AMERICAN is devoted to the interests of Popular Science, the Mechanic Arts, Manufactures, Inventions, Agriculture, Commerce, and the industrial pursuits generally; and it is valuable and instructive not only in the Workshop and Manufactory, but also in the Household, the Library, and the Reading Room.

TERMS.

One copy, one year (postage included).....	$3.20
One copy, six months (postage included)....	1.60
One copy, three months (postage included)..	1.00
One copy of Scientific American for one year, and one copy of engraving, "Men of Progress".....	10.00
One copy of Scientific American for one year, and one copy of "Science Record" for 1875	5.20

Remit by postal order, draft, or express.

Address all letters and make all Post Office orders and drafts payable to

MUNN & CO.
37 PARK ROW, NEW YORK

THE "Scientific American" is printed with CHAS. ENEU JOHNSON & CO.'S INK. Tenth and Lombard Sts., Philadelphia and 59 Gold St. New York

© 1875 SCIENTIFIC AMERICAN, INC